



## TEST REPORT

Product Name: Tablet PC(Notebook)  
Trademark: N/A  
Model Number: MB02, For other series models, refer to Section 4.1.  
Prepared For: Creature Information(Guangzhou)Technology Co., Limited  
Address: Room 404-05, No.4, Nengyuan Rd., Tianhe District, Guangzhou, China  
Manufacturer: Creature Information(Guangzhou)Technology Co., Limited  
Address: Room 404-05, No.4, Nengyuan Rd., Tianhe District, Guangzhou, China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Feb. 07, 2025  
Sample tested Date: Feb. 07, 2025 to Feb. 11, 2025  
Issue Date: Feb. 11, 2025  
Report No.: CTB25020704402RE04  
Test Standards: ETSI EN 301 489-1 V2.2.3 (2019-11)  
ETS EN 301 489-17 V3.2.4 (2020-09)  
ETS EN 301 489-3 V2.3.2 (2023-01)  
Test Results: PASS  
Remark: This is EMC test report.

Compiled by:

Zhou Kuzi

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

Test Report Declaration	Page
<b>1. VERSION</b> .....	<b>4</b>
<b>2. TEST SUMMARY</b> .....	<b>5</b>
<b>3. MEASUREMENT UNCERTAINTY</b> .....	<b>6</b>
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	<b>7</b>
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	8
4.3 Support Equipment .....	8
4.4 Test Mode .....	9
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	<b>10</b>
5.1 Test Facility .....	10
5.2 Test Instrument Used .....	10
<b>6. CONDUCTED EMISSIONS</b> .....	<b>12</b>
6.1 Block Diagram Of Test Setup .....	12
6.2 Limit .....	12
6.3 Test procedure .....	12
6.4 Test Result .....	13
<b>7. RADIATED EMISSIONS TEST</b> .....	<b>15</b>
7.1 Block Diagram Of Test Setup .....	15
7.2 Limits .....	16
7.3 Test Procedure .....	16
7.4 Test Results .....	17
<b>8. HARMONIC CURRENT EMISSION(H)</b> .....	<b>20</b>
8.1 Block Diagram of Test Setup .....	20
8.2 Limit .....	20
8.3 Test Procedure .....	20
8.4 Test Results .....	20
<b>9. VOLTAGE FLUCTUATIONS &amp; FLICKER(F)</b> .....	<b>21</b>
9.1 Block Diagram of Test Setup .....	21
9.2 Limit .....	21
9.3 Test Procedure .....	21
9.4 Test Results .....	21
<b>10. IMMUNITY TEST OF GENERAL THE PERFORMANCE CRITERIA</b> .....	<b>22</b>
<b>11. ELECTROSTATIC DISCHARGE (ESD)</b> .....	<b>26</b>
11.1 Test Specification .....	26
11.2 Block Diagram of Test Setup .....	26
11.3 Test Procedure .....	26
11.4 Test Results .....	27
<b>12. CONTINUOUS RF ELECTROMAGNETIC FIELD DISTURBANCES(RS)</b> .....	<b>28</b>
12.1 Test Specification .....	28
12.2 Block Diagram of Test Setup .....	28
12.3 Test Procedure .....	29
12.4 Test Results .....	29
<b>13. ELECTRICAL FAST TRANSIENTS/BURST (EFT)</b> .....	<b>30</b>
13.1 Test Specification .....	30
13.2 Block Diagram of EUT Test Setup .....	30
13.3 Test Procedure .....	30
13.4 Test Results .....	30
<b>14. SURGES IMMUNITY TEST</b> .....	<b>31</b>
14.1 Test Specification .....	31
14.2 Block Diagram of EUT Test Setup .....	31
14.3 Test Procedure .....	31
14.4 Test Result .....	31
<b>15. CONTINUOUS INDUCED RF DISTURBANCES (CS)</b> .....	<b>32</b>

15.1	Test Specification .....	32
15.2	Block Diagram of EUT Test Setup .....	32
15.3	Test Procedure .....	32
15.4	Test Result .....	32
<b>16.</b>	<b>VOLTAGE DIPS AND INTERRUPTIONS (DIPS).....</b>	<b>33</b>
16.1	Test Specification .....	33
16.2	Block Diagram of EUT Test Setup .....	33
16.3	Test Procedure .....	33
16.4	Test Result .....	33
<b>17.</b>	<b>EUT PHOTOGRAPHS.....</b>	<b>34</b>
<b>18.</b>	<b>EUT TEST SETUP PHOTOGRAPHS .....</b>	<b>43</b>

(NOTE: N/A MEANS NOT APPLICABLE)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB25020704402RE04	Feb. 11, 2025	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

EMISSION		
Standard	Test Item	Test result
EN 55032	Conducted emissions from the AC mains power ports	Pass
EN 55032	Asymmetric mode conducted emissions	N/A <sup>1</sup>
EN 55032	Conducted differential voltage emissions	N/A <sup>2</sup>
EN 55032	Radiated emissions	Pass
EN 61000-3-2	Harmonic current emission(H)	N/A <sup>3</sup>
EN 61000-3-3	Voltage fluctuations & flicker(F)	N/A <sup>4</sup>

IMMUNITY		
Standard	Test Item	Test result
IEC 61000-4-2	Electrostatic discharge (ESD)	Pass
IEC 61000-4-3	Continuous RF electromagnetic field disturbances(RS)	Pass
IEC 61000-4-4	Electrical fast transients/burst (EFT)	N/A <sup>4</sup>
IEC 61000-4-5	Surges	N/A <sup>4</sup>
IEC 61000-4-6	Radio frequency, common mode	N/A <sup>4</sup>
IEC 61000-4-11	Voltage dips and interruptions (DIPS)	N/A <sup>4</sup>

Remark:

1. Applicable to ports listed above and intended to connect to cables longer than 3 m.
2. The Product has no antenna port.
3. The Product belongs to Class A, and its power is less than 75W, so it deems to fulfil this standard without testing.
4. The EUT is powered by the DC battery, the test item is not applicable.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Test item	Value (dB)
Conducted Emission (150KHz-30MHz)	3.2
Radiated Emission(30MHz ~1000MHz)	4.8
Radiated Emission(1GHz ~6GHz)	4.9

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

Model(s):

MB02, MB01, MB02, MB03, MB05, I7, I7 Plus, I7 Pro, I7 Power, I7 Turbo, I7 Ultra, I7 A, I7 A Plus, I7 A Pro, I7 A Power, I7 A Turbo, I7 A Ultra, I7 AI, I7 AI Plus, I7 AI Pro, I7 AI Power, I7 AI Turbo, I7 AI Ultra, I7 S, I7 S Plus, I7 S Pro, I7 S Power, I7 S Turbo, I7 S Ultra, I8, I8 Plus, I8 Pro, I8 Power, I8 Turbo, I8 Ultra, I8 A, I8 A Plus, I8 A Pro, I8 A Power, I8 A Turbo, I8 A Ultra, I8 AI, I8 AI Plus, I8 AI Pro, I8 AI Power, I8 AI Turbo, I8 AI Ultra, I8 S, I8 S Plus, I8 S Pro, I8 S Power, I8 S Turbo, I8 S Ultra, I9, I9 Plus, I9 Pro, I9 Power, I9 Turbo, I9 Ultra, I9 A, I9 A Plus, I9 A Pro, I9 A Power, I9 A Turbo, I9 A Ultra, I9 AI, I9 AI Plus, I9 AI Pro, I9 AI Power, I9 AI Turbo, I9 AI Ultra, I9 S, I9 S Plus, I9 S Pro, I9 S Power, I9 S Turbo, I9 S Ultra, I10, I10 Plus, I10 Pro, I10 Power, I10 Turbo, I10 Ultra, I10 A, I10 A Plus, I10 A Pro, I10 A Power, I10 A Turbo, I10 A Ultra, I10 AI, I10 AI Plus, I10 AI Pro, I10 AI Power, I10 AI Turbo, I10 AI Ultra, I10 S, I10 S Plus, I10 S Pro, I10 S Power, I10 S Turbo, I10 S Ultra, I11, I11 Plus, I11 Pro, I11 Power, I11 Turbo, I11 Ultra, I11 A, I11 A Plus, I11 A Pro, I11 A Power, I11 A Turbo, I11 A Ultra, I11 AI, I11 AI Plus, I11 AI Pro, I11 AI Power, I11 AI Turbo, I11 AI Ultra, I11 S, I11 S Plus, I11 S Pro, I11 S Power, I11 S Turbo, I11 S Ultra, I12, I12 Plus, I12 Pro, I12 Power, I12 Turbo, I12 Ultra, I12 A, I12 A Plus, I12 A Pro, I12 A Power, I12 A Turbo, I12 A Ultra, I12 AI, I12 AI Plus, I12 AI Pro, I12 AI Power, I12 AI Turbo, I12 AI Ultra, I12 S, I12 S Plus, I12 S Pro, I12 S Power, I12 S Turbo, I12 S Ultra, I13, I13 Plus, I13 Pro, I13 Power, I13 Turbo, I13 Ultra, I13 A, I13 A Plus, I13 A Pro, I13 A Power, I13 A Turbo, I13 A Ultra, I13 AI, I13 AI Plus, I13 AI Pro, I13 AI Power, I13 AI Turbo, I13 AI Ultra, I13 S, I13 S Plus, I13 S Pro, I13 S Power, I13 S Turbo, I13 S Ultra, T8, T8 Plus, T8 Pro, T8 Power, T8 Turbo, T8 Ultra, T8 A, T8 A Plus, T8 A Pro, T8 A Power, T8 A Turbo, T8 A Ultra, T8 AI, T8 AI Plus, T8 AI Pro, T8 AI Power, T8 AI Turbo, T8 AI Ultra, T8 S, T8 S Plus, T8 S Pro, T8 S Power, T8 S Turbo, T8 S Ultra, T10, T10 Plus, T10 Pro, T10 Power, T10 Turbo, T10 Ultra, T10 A, T10 A Plus, T10 A Pro, T10 A Power, T10 A Turbo, T10 A Ultra, T10 AI, T10 AI Plus, T10 AI Pro, T10 AI Power, T10 AI Turbo, T10 AI Ultra, T10 S, T10 S Plus, T10 S Pro, T10 S Power, T10 S Turbo, T10 S Ultra, T11, T11 Plus, T11 Pro, T11 Power, T11 Turbo, T11 Ultra, T11 A, T11 A Plus, T11 A Pro, T11 A Power, T11 A Turbo, T11 A Ultra, T11 AI, T11 AI Plus, T11 AI Pro, T11 AI Power, T11 AI Turbo, T11 AI Ultra, T11 S, T11 S Plus, T11 S Pro, T11 S Power, T11 S Turbo, T11 S Ultra, T12, T12 Plus, T12 Pro, T12 Power, T12 Turbo, T12 Ultra, T12 A, T12 A Plus, T12 A Pro, T12 A Power, T12 A Turbo, T12 A Ultra, T12 AI, T12 AI Plus, T12 AI Pro, T12 AI Power, T12 AI Turbo, T12 AI Ultra, T12 S, T12 S Plus, T12 S Pro, T12 S Power, T12 S Turbo, T12 S Ultra, T13, T13 Plus, T13 Pro, T13 Power, T13 Turbo, T13 Ultra, T13 A, T13 A Plus, T13 A Pro, T13 A Power, T13 A Turbo, T13 A Ultra, T13 AI, T13 AI Plus, T13 AI Pro, T13 AI Power, T13 AI Turbo, T13 AI Ultra, T13 S, T13 S Plus, T13 S Pro, T13 S Power, T13 S Turbo, T13 S Ultra, I6, I14, I15, I16

Model Description:

All the model are the same circuit and RF module, only the name and appearance are different, used to distinguish between different sales customers.  
Test sample model: MB02

Bluetooth Version:

Bluetooth 5.0

Hardware Version:

V1.0

Software Version:

V1.0

**Operation Frequency:** Bluetooth: 2402-2480MHz  
 WiFi(5.8G): IEEE 802.11a/n/ac(20M): 5725MHz ~5850MHz/ 5 channel  
 IEEE 802.11n/ac(40M): 5725MHz ~5850MHz/ 2 channel  
 IEEE 802.11ac(80M): 5725MHz ~5850MHz/ 1 channel

**Max. RF output power:** Bluetooth: 7.64dBm  
 WiFi(5.8G): 13.62dBm

**Type of Modulation:** Bluetooth: GFSK,  $\pi/4$  DQPSK, 8DPSK  
 WiFi(5.8G): OFDM

**Antenna installation:** Bluetooth: Internal antenna  
 WiFi(5.8G): Internal antenna

**Antenna Gain:** Bluetooth: 1.0dBi  
 WiFi(5.8G): 1.0dBi

**Ratings:** INPUT: AC 100-240V 0.5A,10.0W  
 OUTPUT: DC 5.0V 2.0A

#### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

#### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC ADAPTER	Shenzhen YingQin electronic co., LTD	EE0502000	/	N/A

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Test Mode

Test Mode	Description	Remark
Mode 1	Bluetooth	TR, CR, TT, CT for EMS testing
Mode 2	5.8G WIFI	TR, CR, TT, CT for EMS testing

NOTE: 1 The test modes were carried out for all operation modes. The final test mode of the EUT was the worst test mode for EMI, and its test data was showed.

2 "Link" is the connect horn alarm mode.

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/10/25
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B )	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

Radiated emission(No.1 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2027/6/21
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/7/06
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Amplifier	HP	8447E	2945A02747	/	2025/6/28
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28


9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2025/6/28
10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2025/6/28
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2025/6/28
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2025/6/28
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

Electrostatic discharges						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	ESD Simulator	TESTQ	NSG437	329	V01.00	2025/6/29
2	Communication test set	R&S	CMW500	108058	Version 2.0	2025/6/28
3	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28

Radio frequency electromagnetic field						
No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2027/6/21
2	Signal Generator	Agilent	N5181A	MY49060920	A.01.60	2025/6/28
3	Stacked Double Log.-Per. Antenna	SKET	STLP 9129 Plus	2106070106	/	/
4	Switch Controller	SKET	RFSU-DC18G-4C	2106070105	/	/
5	RF Power Meter	Agilent	E9304A	MY41490462	/	2025/6/28
6	RF Power Meter	Agilent	E9301A	MY41495675	/	2025/6/28
7	E-Field Probe	Narda	EP-601	811ZX10305	/	2025/7/06
8	Power Amplifier	SKET	HAP-80M01G-250W	2106070103	/	2025/6/28
9	Power Amplifier	SKET	HAP-01G 06G-75W	2106070104	/	2025/6/28
10	Audio Analysis	R&S	ATS-1	ATS 1-41152	/	2025/7/01
11	Audio Output Matching Network	SKET	RCO Network	/	/	2025/7/01
12	RS test software	SKET	V2.0.0.19	/	/	/
13	966 Chamber	C/ R/ T	966	/	/	2026/11/14
14	Communication test set	R&S	CMW500	108058	Version 2.0	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28

## 6. CONDUCTED EMISSIONS

### 6.1 Block Diagram Of Test Setup

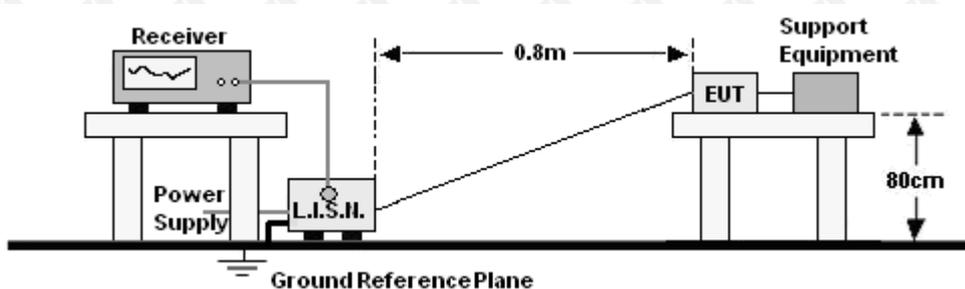

### 6.2 Limit

Limits for Conducted emissions at the mains ports of Class B MME

Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56*	56 to 46*
0,50 to 5	56	46
5 to 30	60	50


- Notes: 1. \*Decreasing linearly with logarithm of frequency.  
2. The lower limit shall apply at the transition frequencies.

### 6.3 Test procedure

- The Product was placed on a nonconductive table 0.8m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

## 6.4 Test Result


Temperature:	23°C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	L
Test Mode	1(the worst data)	Remark:	N/A

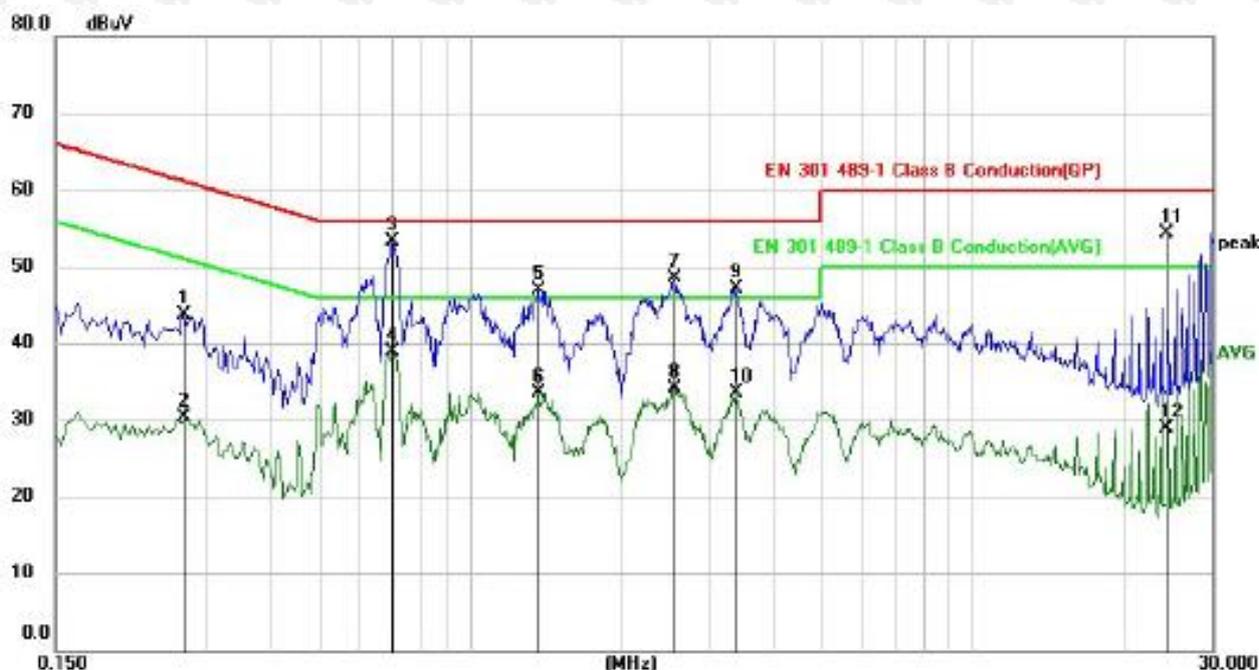

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2700	33.11	10.66	43.77	61.12	-17.35	QP
2		0.2700	19.61	10.66	30.27	51.12	-20.85	AVG
3	*	0.6980	42.63	10.72	53.35	56.00	-2.65	QP
4		0.6980	28.25	10.72	38.97	46.00	-7.03	AVG
5		1.3700	35.78	11.18	46.96	56.00	-9.04	QP
6		1.3700	22.37	11.18	33.55	46.00	-12.45	AVG
7		2.5420	36.73	11.70	48.43	56.00	-7.57	QP
8		2.5420	22.34	11.70	34.04	46.00	-11.96	AVG
9		3.3820	35.20	11.88	47.08	56.00	-8.92	QP
10		3.3820	21.54	11.88	33.42	46.00	-12.58	AVG
11		29.9980	39.79	14.49	54.28	60.00	-5.72	QP
12		29.9980	14.36	14.49	28.85	50.00	-21.15	AVG

Remark: Result=Reading +Factor  
Over Limit=Result -Limit

Temperature:	23 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	N
Test Mode	1(the worst data)	Remark:	N/A

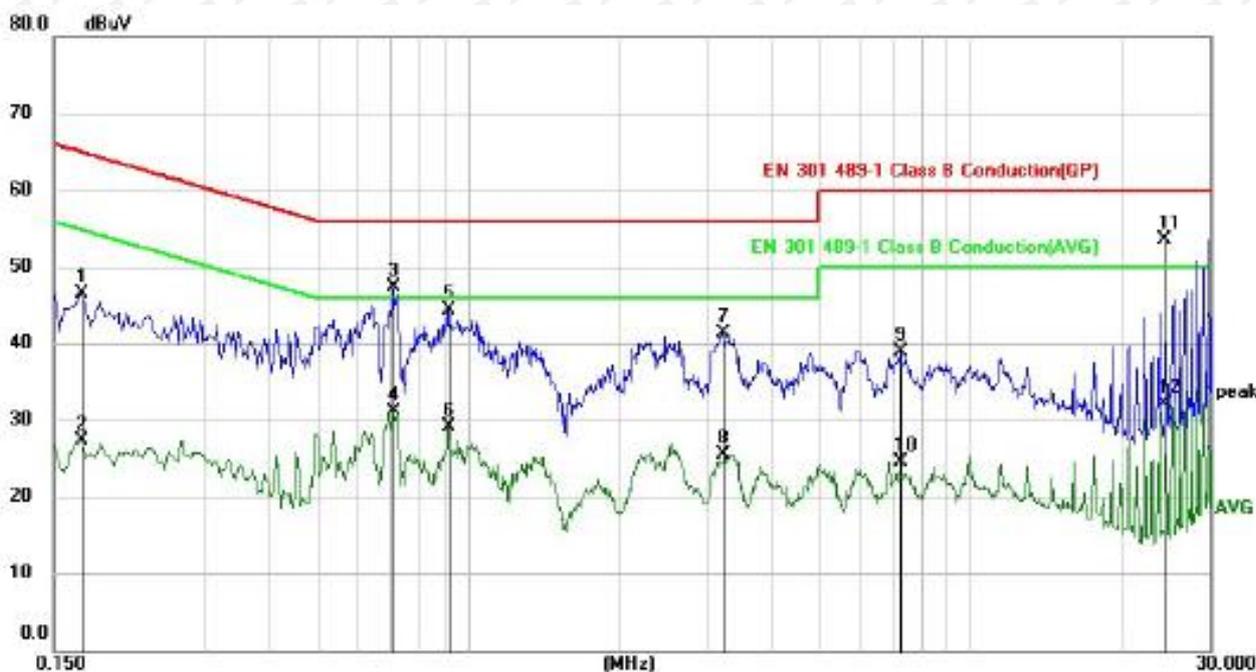


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1700	35.62	10.82	46.44	64.96	-18.52	QP
2		0.1700	16.54	10.82	27.36	54.96	-27.60	AVG
3		0.7100	36.62	10.73	47.35	56.00	-8.65	QP
4		0.7100	20.39	10.73	31.12	46.00	-14.88	AVG
5		0.9140	33.38	10.88	44.26	56.00	-11.74	QP
6		0.9140	18.27	10.88	29.15	46.00	-16.85	AVG
7		3.2139	29.37	11.85	41.22	56.00	-14.78	QP
8		3.2139	13.71	11.85	25.56	46.00	-20.44	AVG
9		7.2619	25.87	12.97	38.84	60.00	-21.16	QP
10		7.2619	11.51	12.97	24.48	50.00	-25.52	AVG
11	*	29.9300	38.97	14.48	53.45	60.00	-6.55	QP
12		29.9300	17.72	14.48	32.20	50.00	-17.80	AVG

Remark: Result=Reading +Factor  
Over Limit=Result -Limit


## 7. RADIATEMISSIONS TEST

### 7.1 Block Diagram Of Test Setup

30MHz ~ 1GHz:

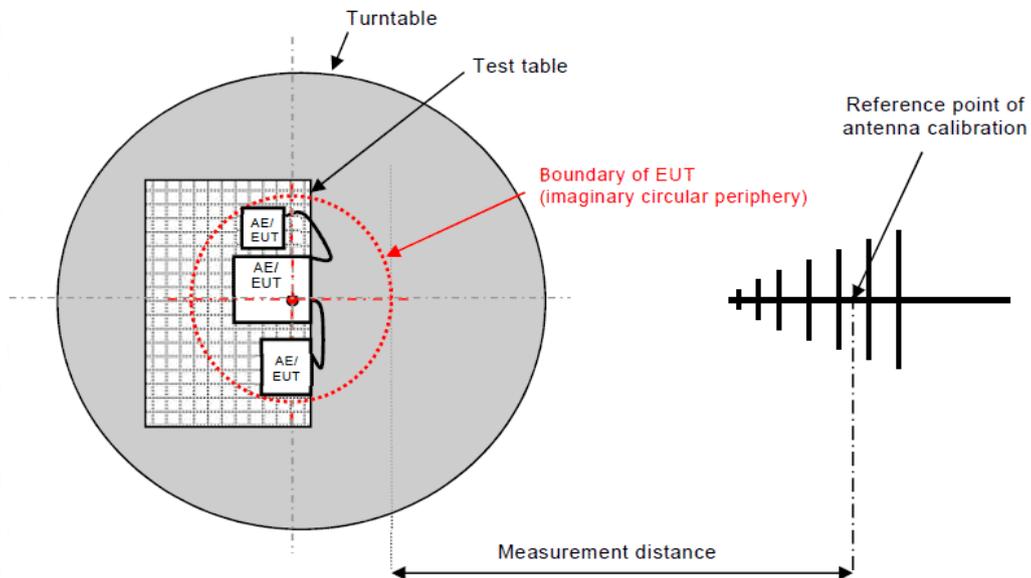

Above 1GHz:

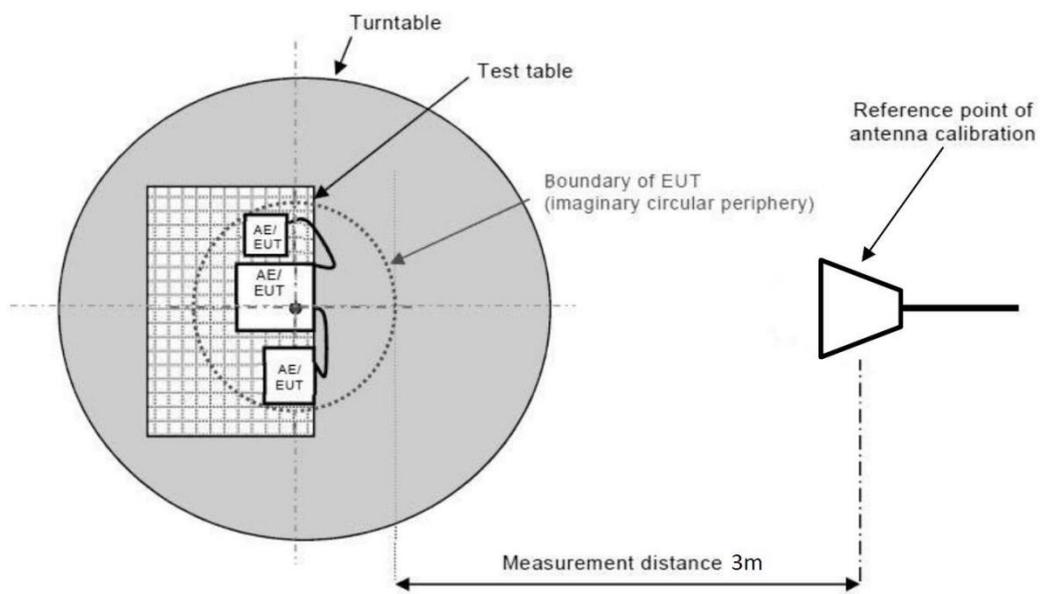

## 7.2 Limits

### Limits for radiated disturbance of Class B MME

Frequency (MHz)	Quasi-peak limits at 3m dB( $\mu$ V/m)
30-230	40
230-1000	47

Frequency (GHz)	limit above 1G at 3m dB( $\mu$ V/m)	
	Average	peak
1-3	50	70
3-6	54	74

**Note:** The lower limit shall apply at the transition frequencies.

## 7.3 Test Procedure

### 30MHz ~ 1GHz:

- The Product was placed on the nonconductive turntable 0.8m above the ground in a semi anechoic chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

### Above 1GHz:

- The Product was placed on the non-conductive turntable 0.8m above the ground in a full anechoic chamber..
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

## 7.4 Test Results

Below 1GHz


Temperature:	23 °C	Relative Humidity:	54%
Pressure:	101kPa	Polarization :	Horizontal
Test Mode	1(the worst data)	Remark:	N/A



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		45.2960	31.18	-6.75	24.43	40.00	-15.57	QP
2		160.0648	27.06	-0.84	26.22	40.00	-13.78	QP
3		311.6326	30.97	-2.65	28.32	47.00	-18.68	QP
4		405.3766	29.99	-0.57	29.42	47.00	-17.58	QP
5		575.6342	26.08	3.21	29.29	47.00	-17.71	QP
6	*	948.7610	27.47	8.60	36.07	47.00	-10.93	QP

Remark: Result=Reading +Factor  
Over Limit=Result -Limit

Temperature:	23 °C	Relative Humidity:	54%
Pressure:	101kPa	Polarization :	Vertical
Test Mode	1(the worst data)	Remark:	N/A

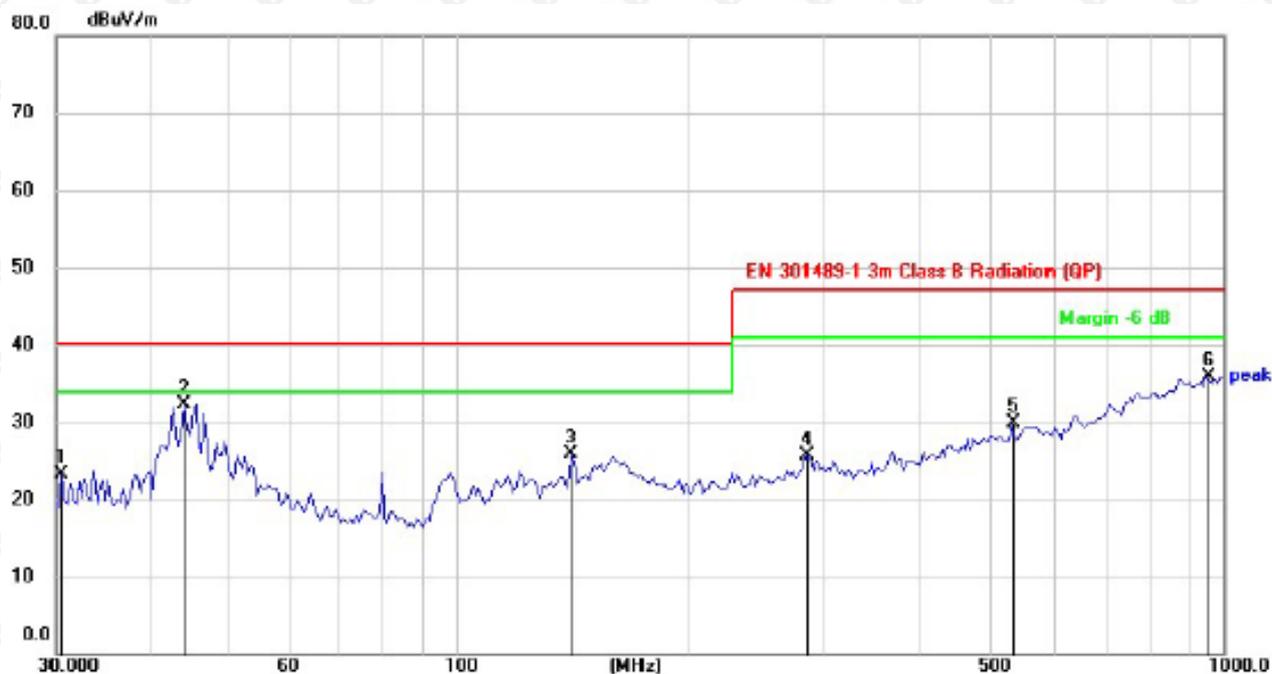

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		30.5306	29.55	-6.20	23.35	40.00	-16.65	QP
2	*	44.1202	39.01	-6.78	32.23	40.00	-7.77	QP
3		141.5777	29.90	-4.08	25.82	40.00	-14.18	QP
4		287.9904	28.75	-3.12	25.63	47.00	-21.37	QP
5		531.9635	27.34	2.59	29.93	47.00	-17.07	QP
6		948.7610	27.24	8.60	35.84	47.00	-11.16	QP

Remark: Result=Reading +Factor  
Over Limit=Result -Limit

Above 1GHz

Temperature:	23 °C	Relative Humidity:	54%
Pressure:	101kPa	Polarization :	Horizontal
Test Mode	1(the worst data)	Remark:	N/A

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1969.20	45.49	1.45	46.94	70.00	-23.06	peak
2	1968.18	28.42	1.45	29.87	50.00	-20.13	AVG
3	3772.83	44.31	5.79	50.10	74.00	-23.90	peak
4	3775.03	24.98	5.79	30.77	54.00	-23.23	AVG
5	4841.06	43.26	9.57	52.84	74.00	-21.16	peak
6	4841.48	24.99	9.57	34.56	54.00	-19.44	AVG

Remark: Result=Reading +Factor  
Over Limit=Result -Limit


Temperature:	23 °C	Relative Humidity:	54%
Pressure:	101kPa	Polarization :	Vertical
Test Mode	1(the worst data)	Remark:	N/A

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1995.27	47.56	1.53	49.09	70.00	-20.91	peak
2	1995.41	29.85	1.53	31.38	50.00	-18.62	AVG
3	3806.28	46.62	5.84	52.46	74.00	-21.54	peak
4	3806.45	28.90	5.84	34.75	54.00	-19.25	AVG
5	4772.26	44.58	9.35	53.93	74.00	-20.07	peak
6	4772.79	27.13	9.35	36.49	54.00	-17.51	AVG

Remark: Result=Reading +Factor  
Over Limit=Result -Limit

## 8. HARMONIC CURRENT EMISSION(H)

### 8.1 Block Diagram of Test Setup

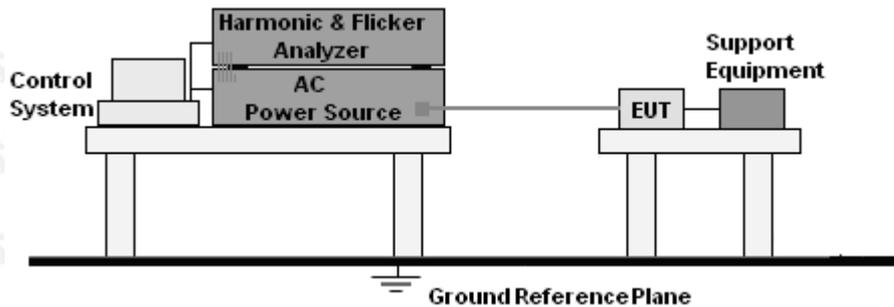

### 8.2 Limit

EN IEC 61000-3-2:2019 Clause 7.

### 8.3 Test Procedure

- a. The Product was placed on the top of a non-conductive table above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- b. The correspondent test program of test instrument to measure the current harmonics emanated from Product was chosen. The measure time shall be not less than the time necessary for the Product to be exercised.


### 8.4 Test Results

Temperature:	23 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Mode	1(the worst data)
Remark:	N/A	Test results	N/A

**Remark:** No limits apply for equipment with an active input power up to and including 75W.

## 9. VOLTAGE FLUCTUATIONS & FLICKER(F)

### 9.1 Block Diagram of Test Setup

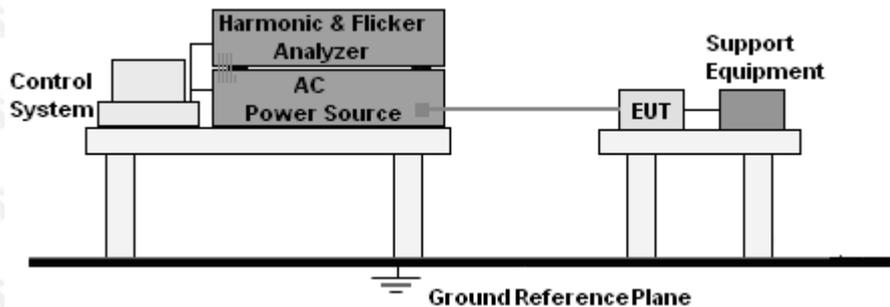

### 9.2 Limit

EN 61000-3-3:2013/A1:2019 Clause 5.

### 9.3 Test Procedure

- a. The Product was placed on the top of a non-conductive table above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.
- b. During the flick test, the measure time shall include that part of whole operation cycle in which the Product produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

### 9.4 Test Results

Temperature:	23 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Mode	1(the worst data)
Remark:	N/A	Test results	N/A

**Remark:** Due to the maximum r.m.s input current (including inrush current) does not exceed 20A, and the supply current after inrush in within a variation band of 1.5A, it's not applicable to test the manual switching. Since the EUT is working in steady state with very low supply current, it will not cause any fluctuations and flicker on the supply system. Considering this, no flicker and voltage fluctuation test had been performed on the EUT, and the EUT can be deemed to comply with the standard accordingly without testing.

### 10. IMMUNITY TEST OF GENERAL THE PERFORMANCE CRITERIA

Product Standard	ETSI EN 301 489-1
	<p>The performance criteria are used to take a decision on whether a radio equipment passes or fails immunity tests.</p> <p>For the purpose of the present document two categories of performance criteria apply:</p> <ul style="list-style-type: none"> <li>•Performance criteria for continuous phenomena.</li> <li>•Performance criteria for transient phenomena.</li> </ul> <p>NOTE: Normally, the performance criteria depends upon the type of radio equipment and/or its intended application. Thus, the present document only contains general performance criteria commonly used for the assessment of radio equipment.</p>
<p>Performance criteria for continuous phenomena</p>	<p>During the test, the equipment shall:</p> <ul style="list-style-type: none"> <li>•continue to operate as intended;</li> <li>•not unintentionally transmit;</li> <li>•not unintentionally change its operating state;</li> <li>•not unintentionally change critical stored data.</li> </ul>
<p>Performance criteria for transient phenomena</p>	<p>For all ports and transient phenomena with the exception described below, the following applies:</p> <ul style="list-style-type: none"> <li>•The application of the transient phenomena shall not result in a change of the mode of operation (e.g. unintended transmission) or the loss of critical stored data.</li> <li>•After application of the transient phenomena, the equipment shall operate as intended.</li> </ul> <p>For surges applied to symmetrically operated wired network ports intended to be connected directly to outdoor lines the following criteria applies:</p> <ul style="list-style-type: none"> <li>•For products with only one symmetrical port intended for connection to outdoor lines, loss of function is allowed, provided the function is self-recoverable, or can be otherwise restored. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</li> <li>•For products with more than one symmetrical port intended for connection to outdoor lines, loss of function on the port under test is allowed, provided the function is self-recoverable. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</li> </ul>

According To EN 301489 -17standard, The General Performance Criteria As Following:

General performance criteria

The performance criteria are:

- performance criteria A for immunity tests with phenomena of a continuous nature;
- performance criteria B for immunity tests with phenomena of a transient nature;
- performance criteria C for immunity tests with power interruptions exceeding a certain time.

The equipment shall meet the minimum performance criteria as specified in the following clauses.

Table 1: Performance criteria

Criteria	During the test	After test (i.e. as a result of the application of the test)
<b>A</b>	Shall operate as intended. (see note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of critical stored data.
<b>B</b>	May be loss of function.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.
<b>C</b>	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data.

NOTE: Operate as intended during the test allows a level of degradation in accordance with clause 6.2.2.

Minimum performance level

For equipment that supports a PER or FER, the minimum performance level shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER, the minimum performance level shall be no loss of the wireless transmission function needed for the intended use of the equipment.

**Performance criteria for Continuous phenomena applied to Transmitters (CT)**

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage The performance criteria A shall apply.

Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an ACKnowledgement (ACK) or NotACKnowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission

resulting from the application of the test is correctly interpreted.

**Performance criteria for Transient phenomena applied to Transmitters (TT)**

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply.

Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an acknowledgement (ACK) or not-acknowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

**Performance criteria for Continuous phenomena applied to Receivers (CR)**

The performance criteria A shall apply.

Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

**Performance criteria for Transient phenomena applied to Receivers (TR)**

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration for which performance criteria C shall apply.

Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

According To EN 301489 -3 standard, The General Performance Criteria As Following:

Table 1: Performance criteria

Criteria	During the test	After test (i.e. as a result of the application of the test)
<b>A</b>	Operate as intended No loss of function No unintentional responses	Operate as intended No loss of function No degradation of performance No loss of stored data or user programmable functions
<b>B</b>	May show loss of function No unintentional responses	Operate as intended Lost function(s) shall be self-recoverable No degradation of performance No loss of stored data or user programmable functions
NOTE: Whether a phenomenon is considered transient, continuous or otherwise is indicated in the test procedures for the phenomenon in ETSI EN 301 489-1 [1], clause 9.		


- performance criterion A applies for immunity tests with phenomena of a continuous nature;
- performance criterion B applies for immunity tests with phenomena of a transient nature.

## 11. ELECTROSTATIC DISCHARGE (ESD)

### 11.1 Test Specification

<b>Test Port</b>	: Enclosure port
<b>Discharge Impedance</b>	: 330 ohm / 150 pF
<b>Discharge Mode</b>	: Single Discharge
<b>Discharge Period</b>	: one second between each discharge

### 11.2 Block Diagram of Test Setup

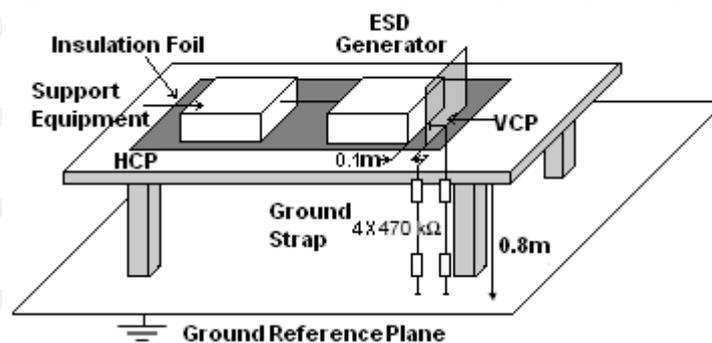

### 11.3 Test Procedure

- Electrostatic discharges were applied only to those points and surfaces of the Product that are accessible to users during normal operation.
- The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- The time interval between two successive single discharges was at least 1 second.
- The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the Product.
- Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- Air discharges were applied with the round discharge tip of the discharge electrode approaching the Product as fast as possible (without causing mechanical damage) to touch the Product. After each discharge, the ESD generator was removed from the Product and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- At least ten single discharges (in the most sensitive polarity) were applied to the Horizontal Coupling Plane at points on each side of the Product. The ESD generator was positioned vertically at a distance of 0.1 meters from the Product with the discharge electrode touching the HCP.
- At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane in sufficiently different positions that the four faces of the Product were completely illuminated. The VCP (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the Product.

## 11.4 Test Results

Temperature :	23°C	Relative Humidity :	54%
Pressure :	101kPa	Test Mode :	Mode1- Mode2

Discharge Method	Discharge Position	Voltage (±kV)	Min. No. of Discharge per polarity (Each Point)	Performance Criterion
Contact Discharge	Conductive Surfaces	4	10	A
	Indirect Discharge HCP	4	10	A
	Indirect Discharge VCP	4	10	A
Air Discharge	Slots, Apertures, and Insulating Surfaces	8	10	A

Note: A: No performance degradation during test.

B: During the test, the EUT shut down, after the test, it reset by itself.

C: During the test, the EUT shut down, after the test, it reset by user.


## 12. CONTINUOUS RF ELECTROMAGNETIC FIELD DISTURBANCES(RS)

### 12.1 Test Specification


<b>Test Port</b>	:	Enclosure port
<b>Step Size</b>	:	1%
<b>Modulation</b>	:	1kHz, 80% AM
<b>Dwell Time</b>	:	1 second
<b>Polarization</b>	:	Horizontal & Vertical

### 12.2 Block Diagram of Test Setup

Below 1GHz:

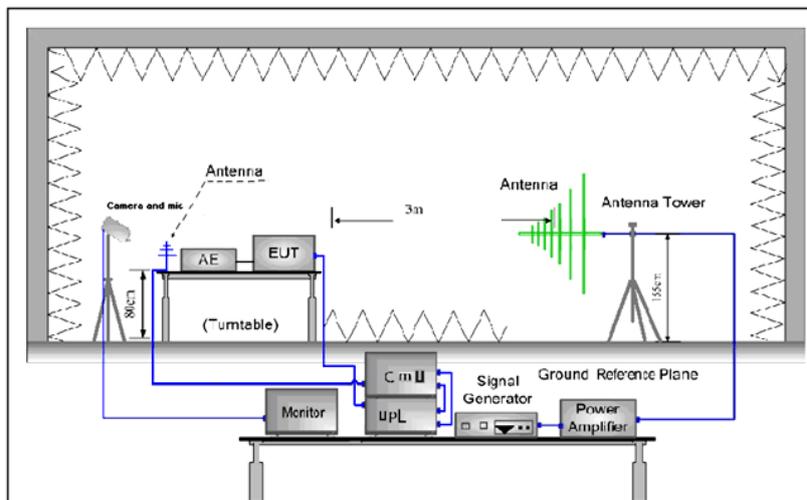

Above 1GHz:

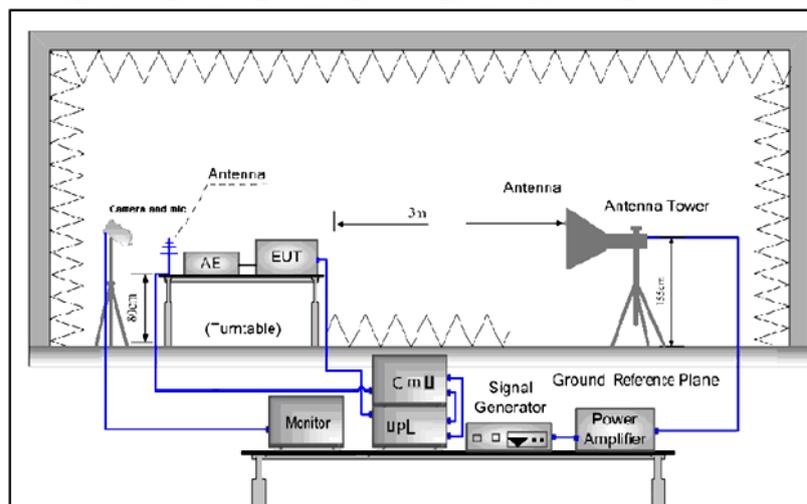

### 12.3 Test Procedure

- a. The testing was performed in a fully-anechoic chamber. The transmit antenna was located at a distance of 3 meters from the Product.
- b. The frequency range is swept from 80MHz to 6000MHz, with the signal 80% amplitude modulated with a 1 kHz sine wave, and the step size was 1%.
- c. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised and to be able to respond, but should not exceed 5 s at each of the frequencies during the scan.
- d. The test was performed with the Product exposed to both vertically and horizontally polarized fields on each of the four sides.
- e. For Broadcast reception function: Group 2 not apply in this test.

### 12.4 Test Results

Temperature :	23°C	Relative Humidity :	54%
Pressure :	101kPa	Test Mode :	Mode1- Mode2

Frequency	Position	Field Strength (V/m)	Performance Criterion
80 - 6000MHz	Front, Right, Back, Left, Up, Down	3	A
Note: A: No performance degradation during test.			


### 13. ELECTRICAL FAST TRANSIENTS/BURST (EFT)

#### 13.1 Test Specification

<b>Test Port</b>	: input a.c. power port
<b>Impulse Frequency</b>	: 5 kHz
<b>Impulse Wave-shape</b>	: 5/50 ns
<b>Burst Duration</b>	: 15 ms
<b>Burst Period</b>	: 300 ms
<b>Test Duration</b>	: 2 minutes per polarity

#### 13.2 Block Diagram of EUT Test Setup

For input a.c.power port:

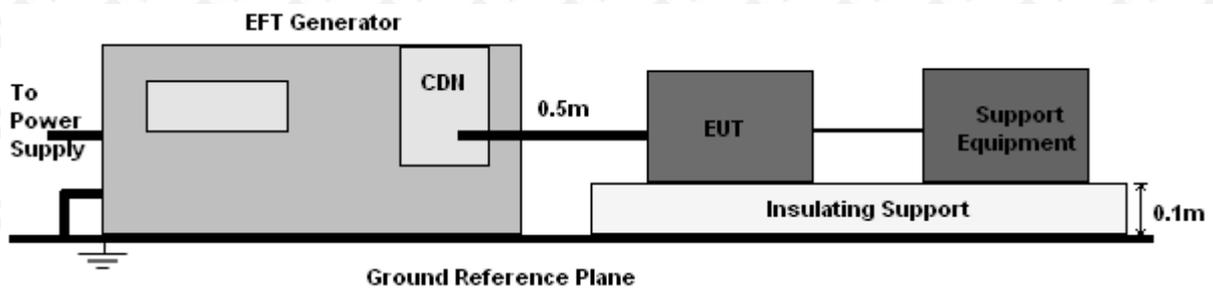

#### 13.3 Test Procedure

- a. The Product and support units were located on a non-conductive table above ground reference plane.
- b. A 0.5m-long power cord was attached to Product during the test.

#### 13.4 Test Results


N/A

## 14. SURGES IMMUNITY TEST

### 14.1 Test Specification

<b>Test Port</b>	: input a.c. power port
<b>Wave-Shape</b>	: Open Circuit Voltage - 1.2 / 50 us Short Circuit Current - 8 / 20 us
<b>Pulse Repetition Rate</b>	: 1 pulse / min.
<b>Phase Angle</b>	: 0° / 90° / 180° / 270°
<b>Test Events</b>	: 5 pulses (positive & negative) for each polarity

### 14.2 Block Diagram of EUT Test Setup

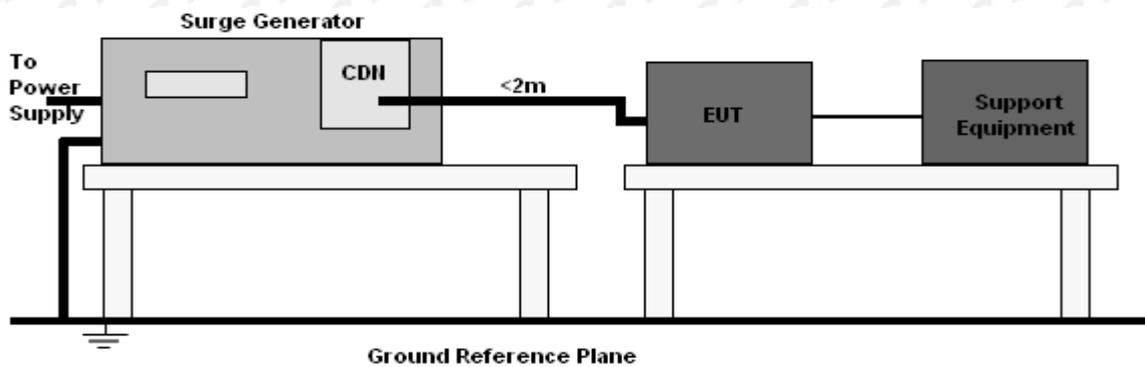

### 14.3 Test Procedure

- a. The surge is to be applied to the Product power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave.
- b. The power cord between the Product and the coupling/decoupling networks shall be 2 meters in length (or shorter). Interconnection line between the Product and the coupling/decoupling networks shall be 2 meters in length (or shorter).

### 14.4 Test Result

N/A


**15. CONTINUOUS INDUCED RF DISTURBANCES (CS)**

15.1 Test Specification

<b>Test Port</b>	:	input a.c.power port
<b>Step Size</b>	:	1%
<b>Modulation</b>	:	1kHz, 80% AM
<b>Dwell Time</b>	:	1 second

15.2 Block Diagram of EUT Test Setup

**For input a.c. power port:**

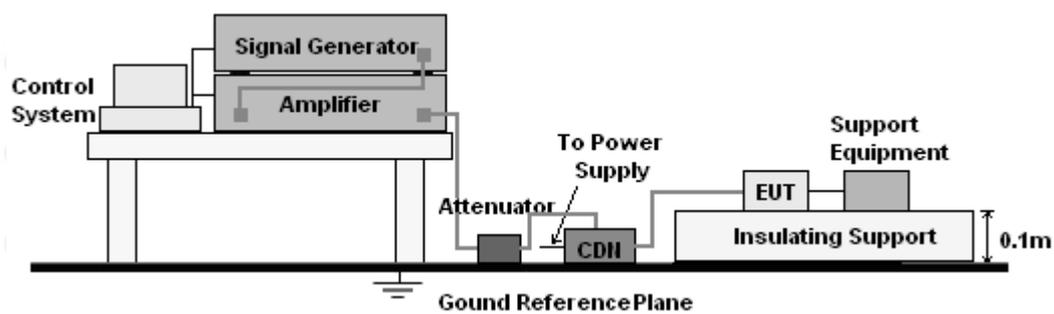

15.3 Test Procedure

**For input a.c.power port:**

- The Product and support units were located at a ground reference plane with the interposition of a 0.1 m thickness insulating support and the CDN was located on GRP directly.
- The frequency range is swept from 150 kHz to 10MHz, 10MHz to 30MHz, 30MHz to 80MHz with the signal 80% amplitude modulated with a 1 kHz sine wave, and the step size was 1% of fundamental.
- The dwell time at each frequency shall be not less than the time necessary for the Product to be able to respond.

15.4 Test Result


N/A

## 16. VOLTAGE DIPS AND INTERRUPTIONS (DIPS)

### 16.1 Test Specification

<b>Test Port</b>	: input a.c. power port
<b>Phase Angle</b>	: 0°, 180°
<b>Test cycle</b>	: 3 times

### 16.2 Block Diagram of EUT Test Setup

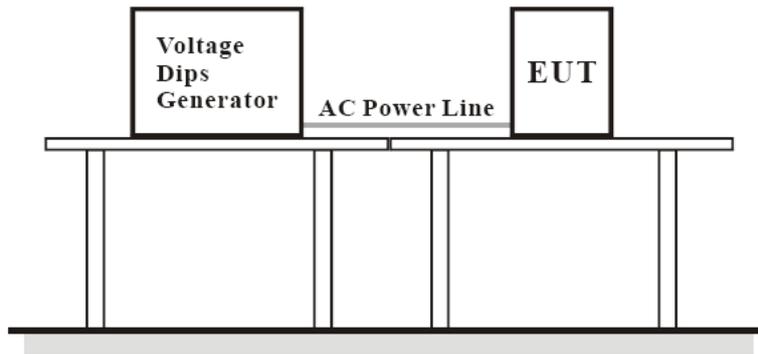

### 16.3 Test Procedure


- The Product and support units were located on a non-conductive table above ground floor.
- Set the parameter of tests and then perform the test software of test simulator.
- Conditions changes to occur at 0 degree crossover point of the voltage waveform.

### 16.4 Test Result

N/A

## 17. EUT PHOTOGRAPHS

### External Photos EUT Photo 1

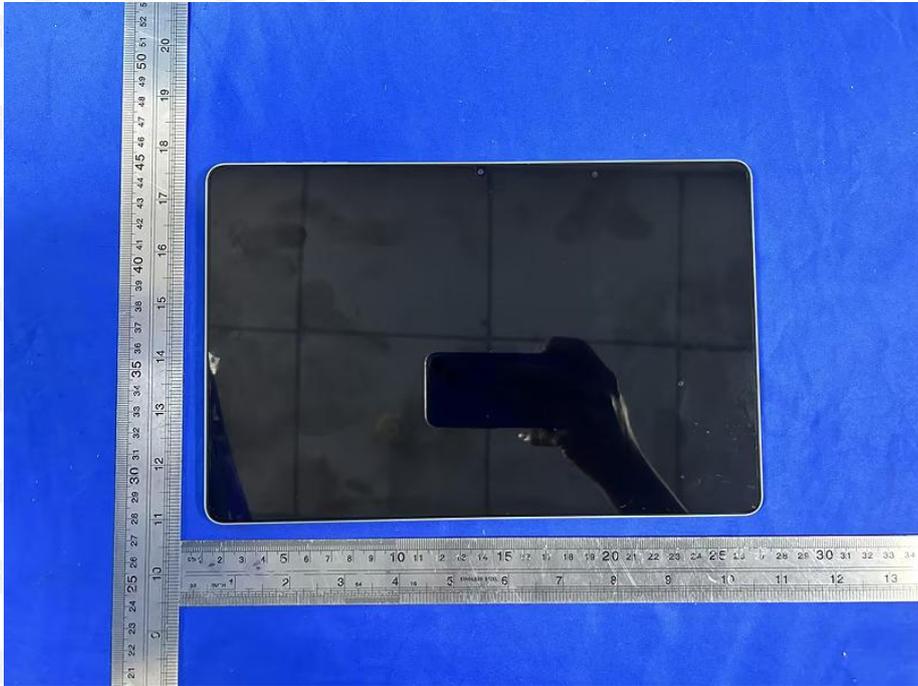


### EUT Photo 2



EUT Photo 3



EUT Photo 4

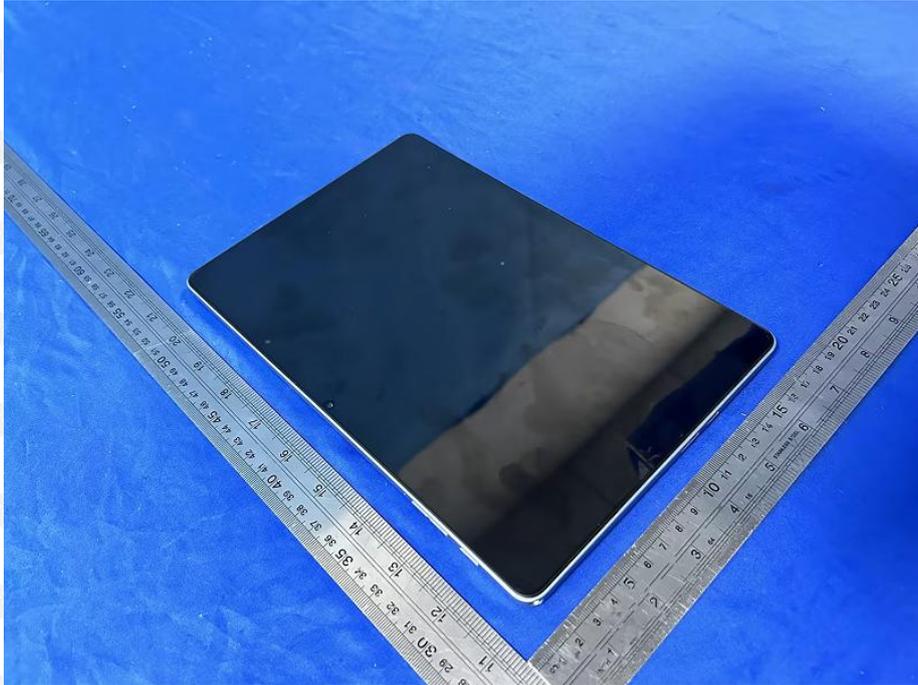


EUT Photo 5




EUT Photo 6




### Internal Photos EUT Photo 1

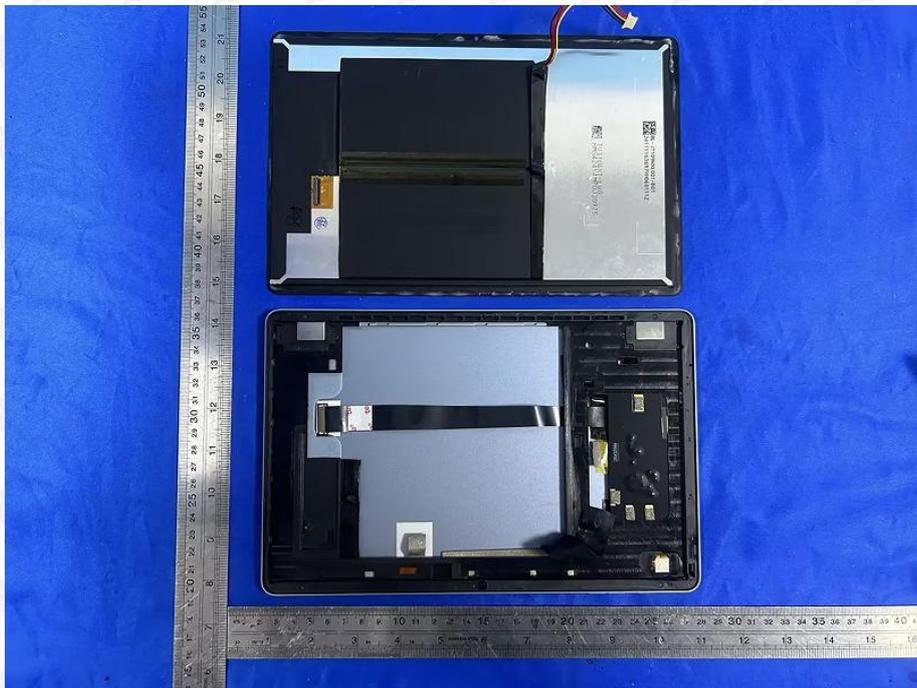

### EUT Photo 2

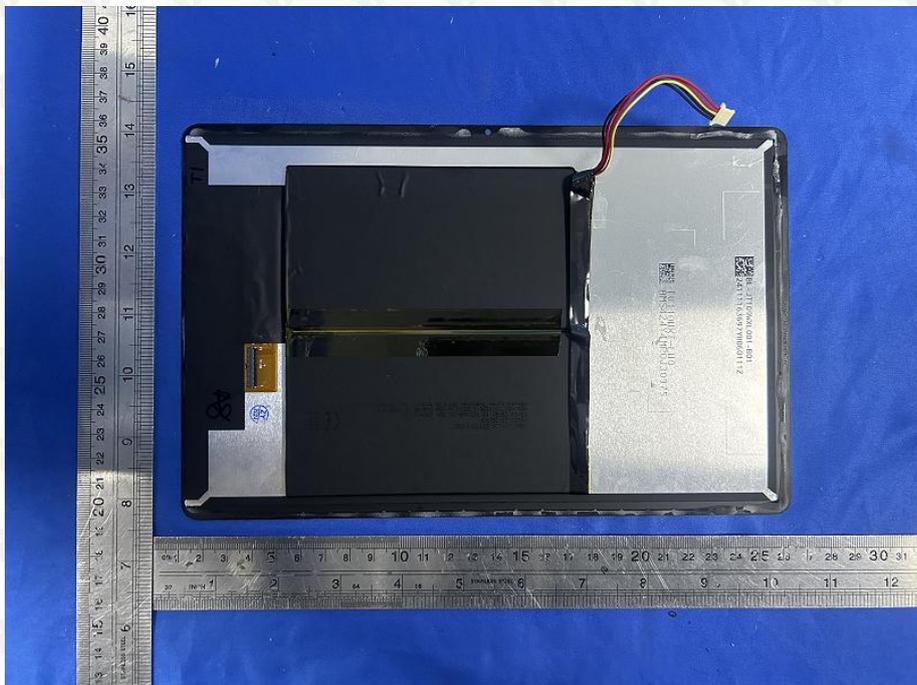


EUT Photo 3

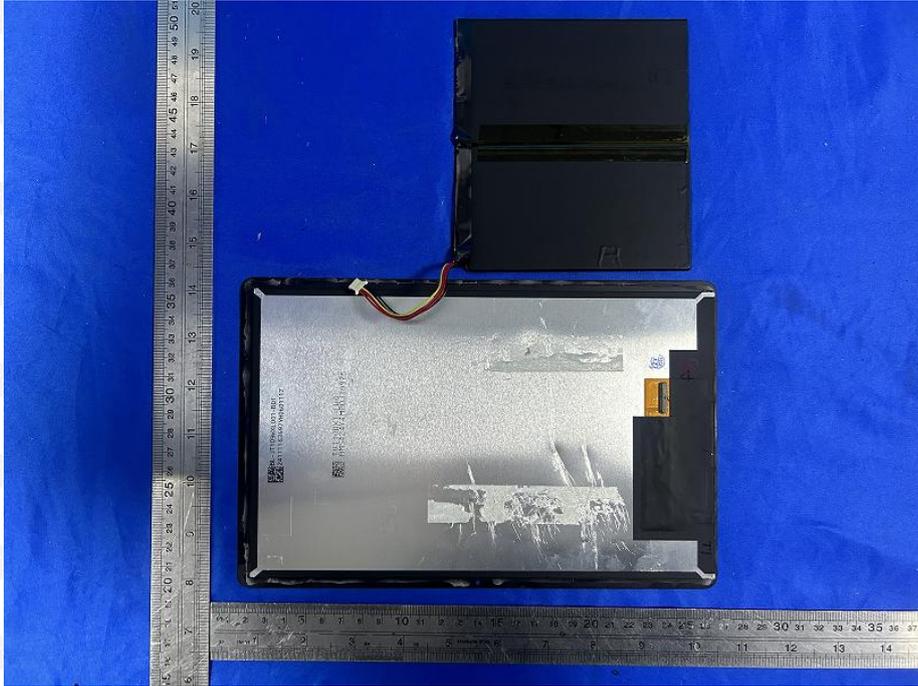


EUT Photo 4




EUT Photo 5

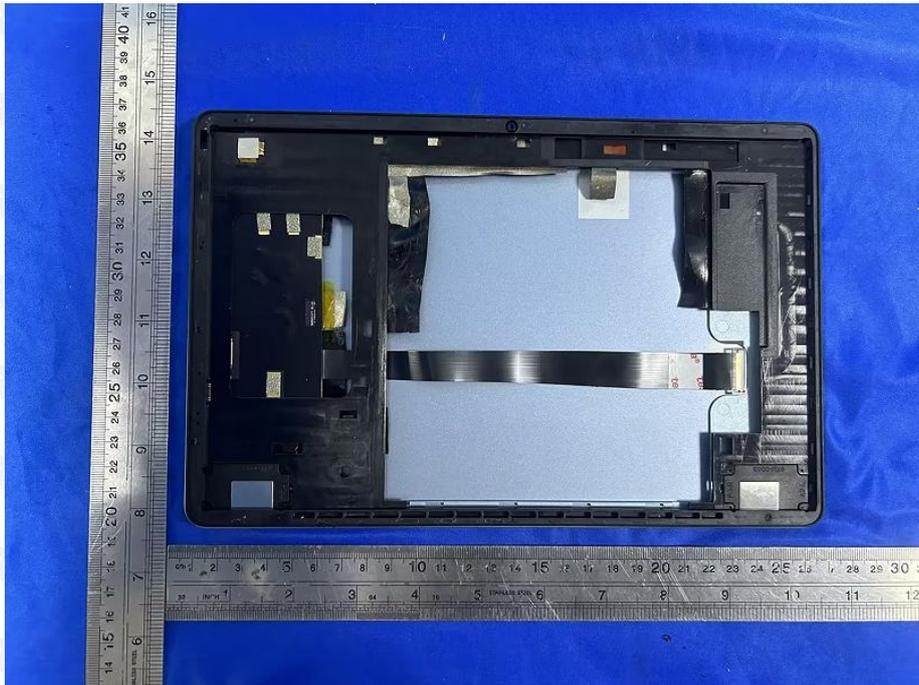


EUT Photo 6

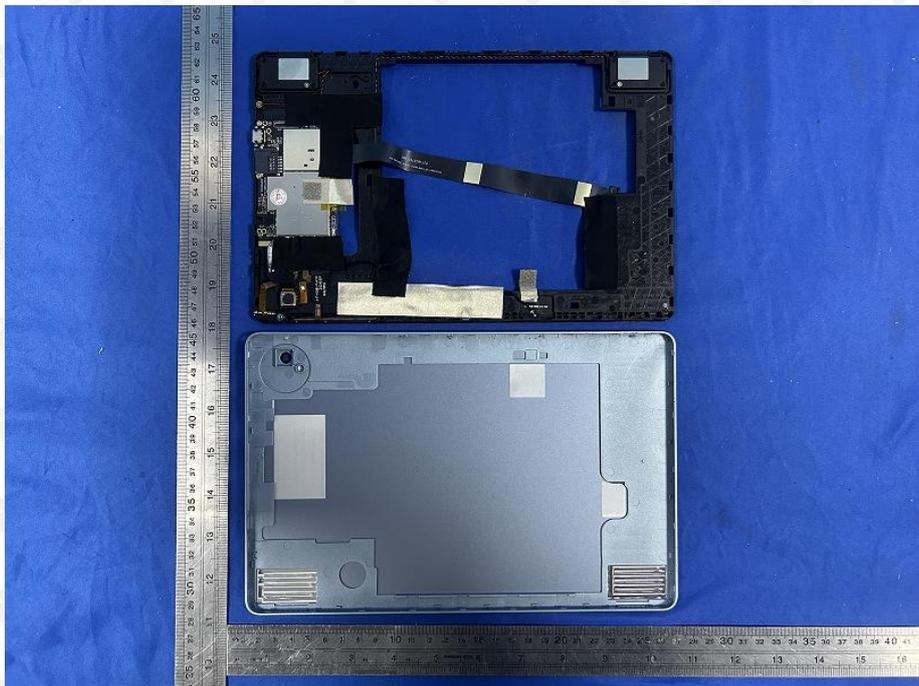


EUT Photo 7

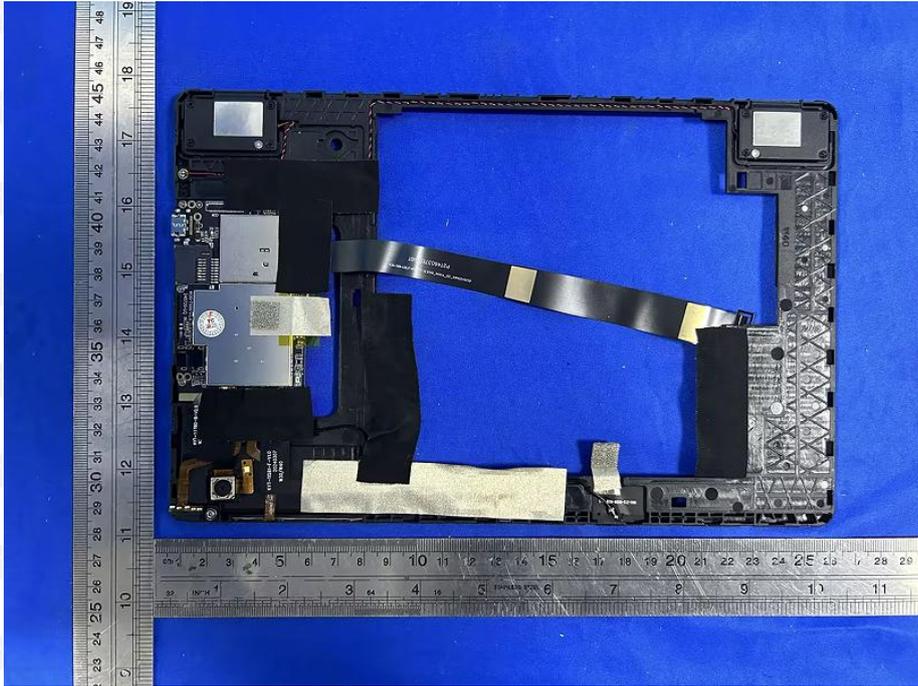


EUT Photo 8

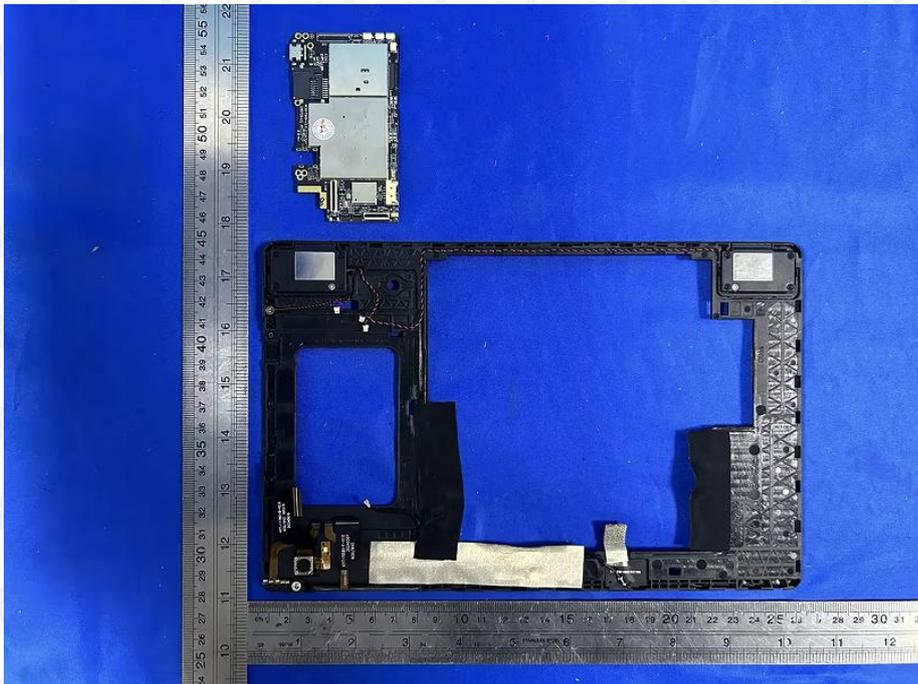


EUT Photo 9

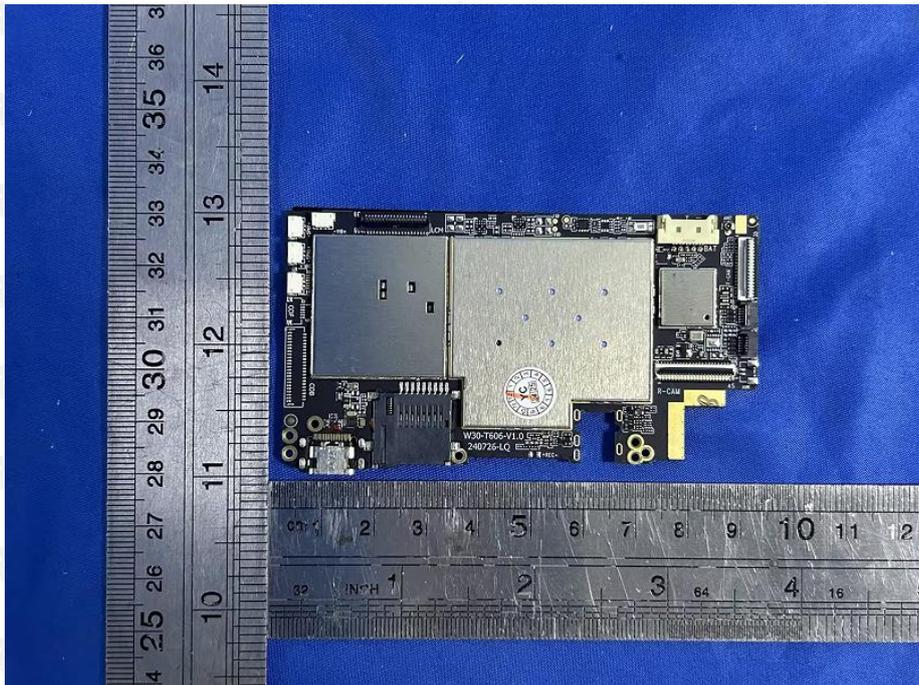


EUT Photo 10

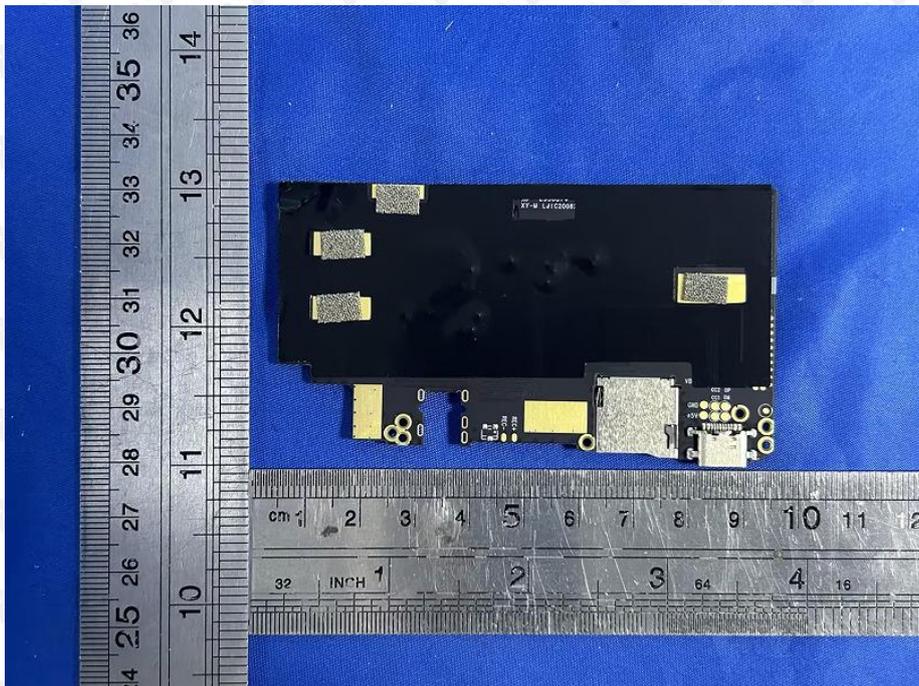

EUT Photo 11

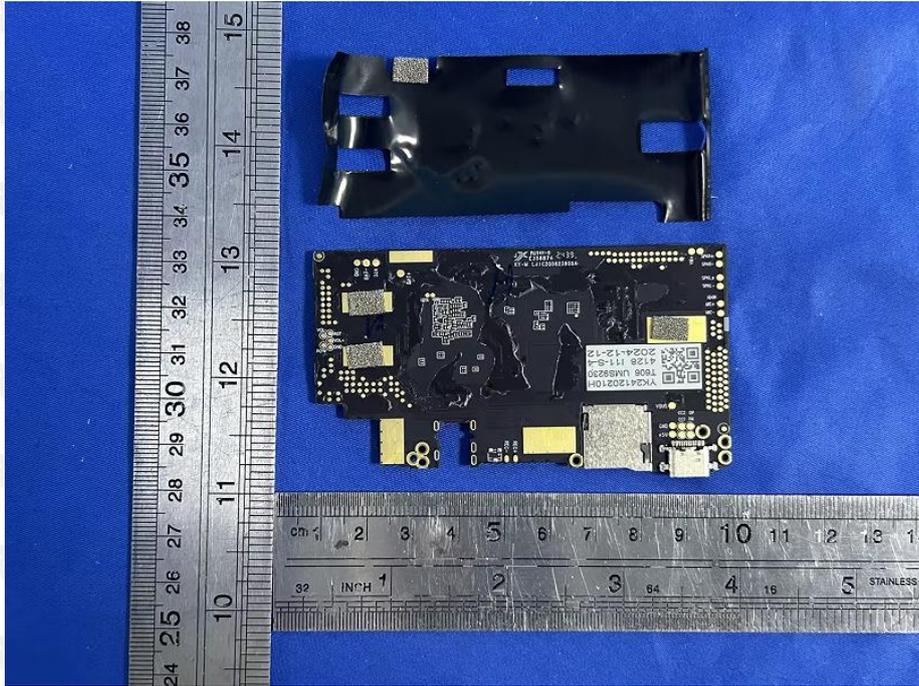

EUT Photo 12

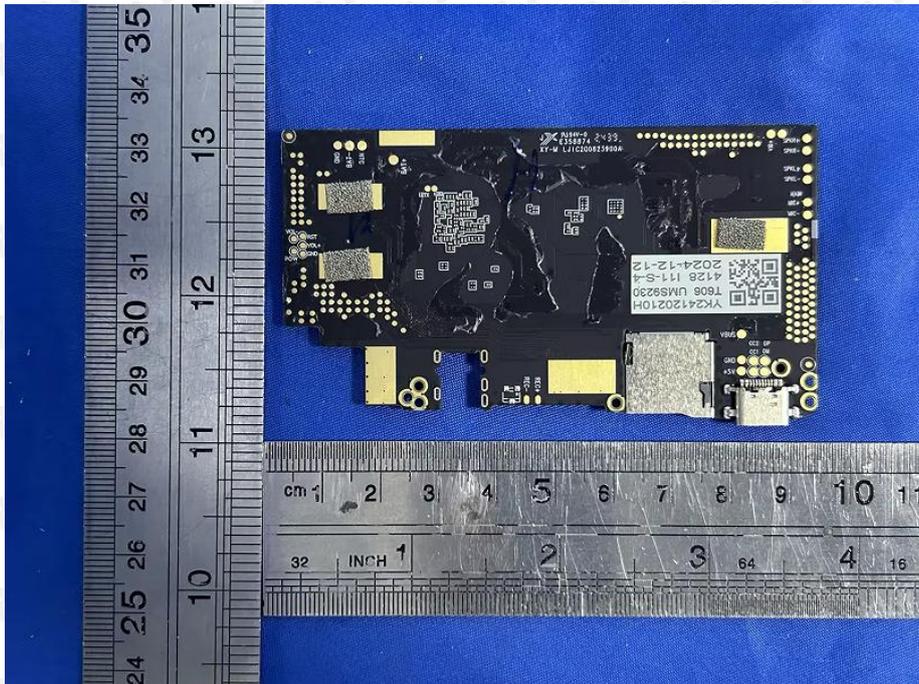


## 18. EUT TEST SETUP PHOTOGRAPHS

### Conducted emissions




### Radiated emissions below 1G

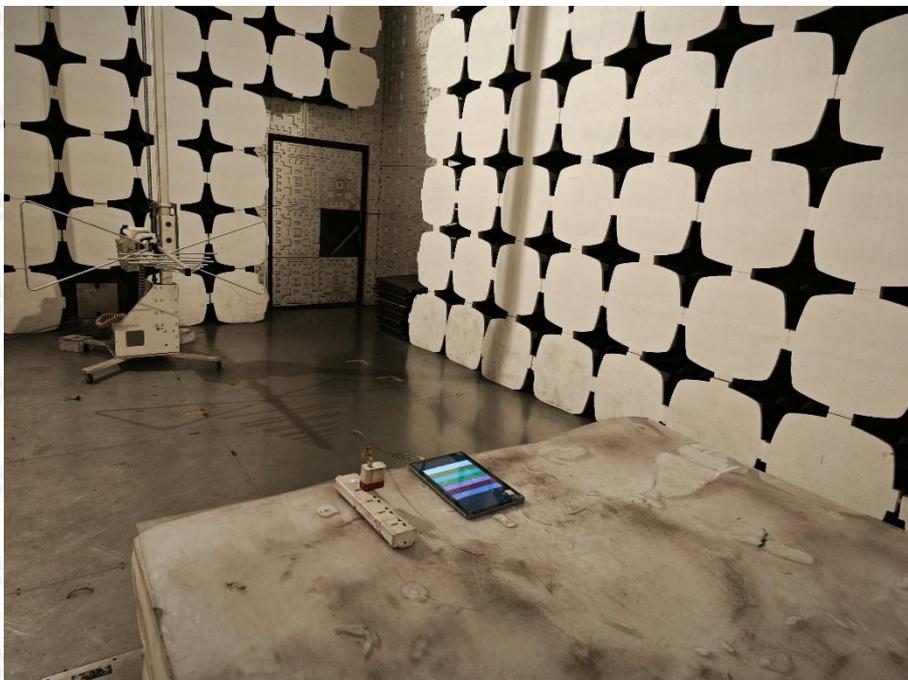

## ESD



## RS

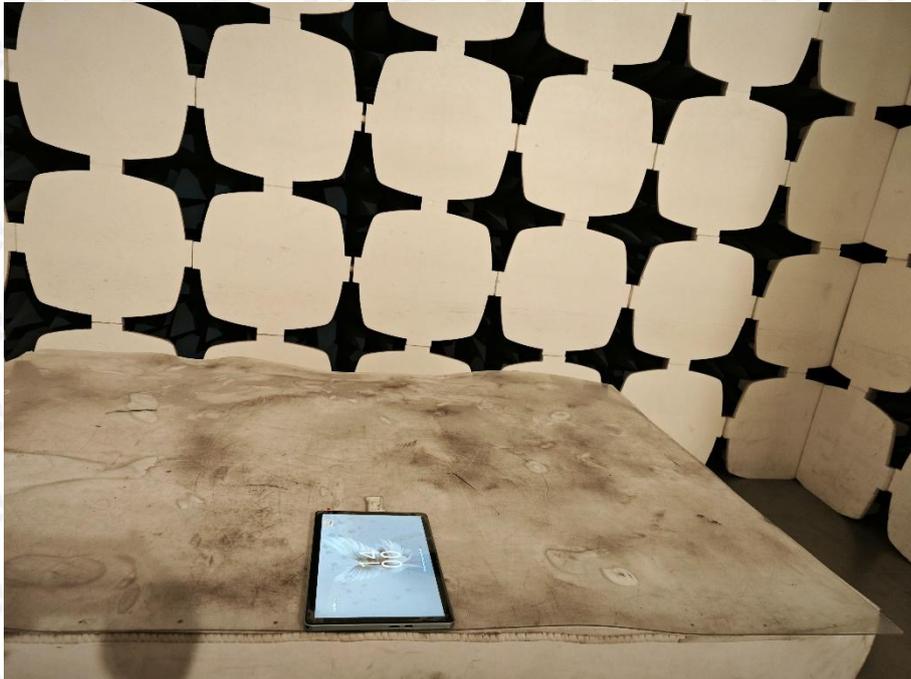

\*\*\*\*\* END OF REPORT\*\*\*\*\*