



中国认可
国际互认
检测
TESTING
CNAS L7497

Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

ETSI EN 300 328 V2.2.2 (2019-07)

Report Reference No. : CTL2312127041-WR01

Compiled by: (position+printed name+signature)	Happy Guo (File administrators)
Tested by: (position+printed name+signature)	Wuqiang Wu (Test Engineer)
Approved by: (position+printed name+signature)	Ivan Xie (Manager)



Product Name : ROBOTIC POOL SKIMMER
 Model/Type reference : Aiper Surfer S1
 List Model(s)..... : Aiper Surfer M1
 Trade Mark..... : Aiper

Applicant's name : **Shenzhen Aiper Intelligent Co.,Ltd.**
 Address of applicant : Units 3201,3203A and 3205, 32nd floor, Block C, Phase 2 Galaxy World, Minle community, Minzhi street, Longhua district, Shenzhen, China

Test Firm..... : **Shenzhen CTL Testing Technology Co., Ltd.**
 Address of Test Firm : Zone A, 1/ F, Warehouse 2, Baisha Logistics Company, No. 3011 Shahe West Road, Nanshan District, Shenzhen,Guangdong, China

Test specification..... :
 Standard : **ETSI EN 300 328 V2.2.2 (2019-07)**
 TRF Originator : Shenzhen CTL Testing Technology Co., Ltd.
 Master TRF : Dated 2011-01

Date of Receipt..... : Jan.15, 2024
 Date of Test Date..... : Jan.15, 2024-Feb.05, 2024
 Date of Issue : Feb.05. 2024
 Result..... : **Pass**

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.
 This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL2312127041-WR01	Feb.05, 2024
		Date of issue

Equipment under Test : ROBOTIC POOL SKIMMER

Sample No. CTL2312127041

Model /Type : Aiper Surfer S1

Listed Models : Aiper Surfer M1

Applicant : **Shenzhen Aiper Intelligent Co.,Ltd.**

Address : Units 3201,3203A and 3205, 32nd floor, Block C, Phase 2 Galaxy World, Minle community, Minzhi street, Longhua district, Shenzhen, China

Manufacturer : **Shenzhen Aiper Intelligent Co.,Ltd.**

Address : Units 3201,3203A and 3205, 32nd floor, Block C, Phase 2 Galaxy World, Minle community, Minzhi street, Longhua district, Shenzhen, China

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

Contents

1	TEST SUMMARY	5
1.1	TEST STANDARDS.....	5
1.2	TEST DESCRIPTION.....	5
1.3	TEST FACILITY	6
1.4	STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	6
2	GENERAL INFORMATION	8
2.1	ENVIRONMENTAL CONDITIONS	8
2.2	GENERAL DESCRIPTION OF EUT.....	8
2.3	RECEIVER CATEGORIES	9
2.4	DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....	9
2.5	MEASUREMENT INSTRUMENTS LIST	9
3	TEST ITEM AND RESULTS	11
3.1	RF OUTPUT POWER	11
3.2	POWER SPECTRAL DENSITY	13
3.3	DUTY CYCLE, TX-SEQUENCE, TX-GAP.....	14
3.4	MEDIUM UTILISATION (MU) FACTOR	15
3.5	OCCUPIED CHANNEL BANDWIDTH	16
3.6	TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN.....	17
3.7	TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN.....	18
3.8	RECEIVER SPURIOUS EMISSIONS.....	28
3.9	ADAPTIVITY.....	37
3.10	RECEIVER BLOCKING	39
4	TEST SETUP PHOTOS OF THE EUT	42
5	EXTERNAL AND INTERNAL PHOTOS OF THE EUT.....	43
6	ANNEX E.....	44

1 TEST SUMMARY

1.1 Test Standards

The tests were performed according to following standards:

ETSI EN 300 328 V2.2.2 (2019-07)–Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using wide band modulation techniques; Harmonised Standard covering the essential requirements of article 3.2 of the Directive 2014/53/EU

1.2 Test Description

Item	Reference	Result
Maximum transmit power	ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.2	PASS
Power Spectral Density	ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.3	PASS
Duty Cycle, Tx-sequence, Tx-gap	ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.4	N/A _{note1}
Medium Utilisation (MU) factor	ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.5	N/A _{note1}
Adaptively	ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.6	PASS
Occupied Channel Bandwidth	ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.7	PASS
Transmitter unwanted emissions in the out-of-band domain	ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.8	PASS
Transmitter unwanted emissions in the spurious domain	ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.9	PASS
Receiver spurious emissions	ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.10	PASS
Receiver Blocking	ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.11	PASS
Geo-location capability	ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.12	N/A _{note2}

Note1: This requirement does not apply to adaptive equipment.

Note2: This equipment without geo-location capability function.

1.3 Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co.,Ltd.

Zone A, 1/ F, Warehouse 2, Baisha Logistics Company, No. 3011 Shahe West Road,
Nanshan District, Shenzhen,Guangdong,China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9618B

CAB Identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B on Jan.22, 2019.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

1.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Occupied Channel Bandwidth	±2%	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission	1.60 dB	(1)
Radiated spurious emission	2.20 dB	(1)

Temperature	$\pm 1^{\circ}\text{C}$	(1)
Humidity	$\pm 3\%$	(1)
DC and low frequency voltages	$\pm 1.5\%$	(1)
Time	$\pm 2\%$	(1)
Duty cycle	$\pm 2\%$	(1)
RF output power	$\pm 1.18 \text{ dB}$	(1)
Power Spectral Density	$\pm 1.51 \text{ dB}$	(1)
Duty Cycle	$\pm 0.11\%$	(1)
Tx-sequence	$\pm 0.11\%$	(1)
Tx-gap	$\pm 0.11\%$	(1)
Medium Utilisation (MU) factor	$\pm 1.18\%$	(1)
Dwell time	$\pm 0.11\%$	(1)
Minimum Frequency Occupation	$\pm 1.9\%$	(1)
Hopping Sequence	$\pm 1.9\%$	(1)
Hopping Frequency Separation	$\pm 1.9\%$	(1)
Occupied Channel Bandwidth	$\pm 1.9\%$	(1)
Transmitter unwanted emissions in the out-of-band domain	$\pm 1.21 \text{ dB}$	(1)
Transmitter unwanted emissions in the spurious domain	9kHz-7GHz: $\pm 1.09 \text{ dB}$ 7GHz-26.5GHz: $\pm 3.27 \text{ dB}$	(1)
Receiver spurious emissions	9kHz-7GHz: $\pm 1.09 \text{ dB}$ 7GHz-26.5GHz: $\pm 3.27 \text{ dB}$	(1)
Adaptivity	$\pm 1.17\%$	(1)
Receiver Blocking	$\pm 2.69\%$	(1)

Note 1: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

2 GENERAL INFORMATION

2.1 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature	Normal Temperature:	25°C
	High Temperature:	35°C
	Low Temperature:	5°C
Voltage	Normal Voltage	DC 10.80V
Other	Relative Humidity	55 %
	Air Pressure	101 kPa

2.2 General Description of EUT

Product Name:	ROBOTIC POOL SKIMMER
Model/Type reference:	Aiper Surfer S1
Power supply:	AC100-240V~ 50/60Hz 0.8A from adapter or DC 10.8V from battery
Adapter 1	Model:DZ024EHL126180V Input:100-240V~50/60Hz 0.8A Output:12.6V == 1.8A 22.68W
Adapter 2	Model:GQ24-126180-AG Input:100-240V~50/60Hz 1.0A Output:12.6V == 1.8A 22.68W
2.4G WIFI	
Supported type:	802.11b/802.11g/802.11n(H20)/802.11n(H40)
Modulation:	802.11b: DSSS 802.11g/802.11n(H20)/802.11n(H40): OFDM
Operation frequency:	802.11b/802.11g/802.11n(H20): 2412MHz~2472MHz 802.11n(H40): 2422MHz~2462MHz
Channel number:	802.11b/802.11g/802.11n(H20): 13 802.11n(H40): 11
Channel separation:	5MHz
Antenna type:	PCB Antenna
Antenna gain:	4.81dBi

Note 1: For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

Note 2: Antenna gain provided by the applicant.

2.3 Receiver categories

This device belongs to the receiver categories as the choice box selected:

	Categorization	Note
<input checked="" type="checkbox"/>	Receiver category 1	Adaptive equipment with a maximum RF output power greater than 10 dBm e.i.r.p.
<input type="checkbox"/>	Receiver category 2	Non-adaptive equipment with a Medium Utilization (MU) factor greater than 1 % and less than or equal to 10 % or adaptive equipment with a maximum RF output power of 10 dBm e.i.r.p.
<input type="checkbox"/>	Receiver category 3	Non-adaptive equipment with a maximum Medium Utilization (MU) factor of 1 % or adaptive equipment with a maximum RF output power of 0 dBm e.i.r.p.

2.4 Description of Test Modes and Test Frequency

The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List WIFI :

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

Note: The line display in grey were the channel selected for testing

2.5 Measurement Instruments List

RF output power& PSD & OOB & OBW & Hopping & Duty Cycle, Tx-sequence, Tx-gap&Adaptively, Blocking						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	Spectrum Analyzer	Agilent	N9020A	US46220290	2023/05/05	2024/05/04
2	Spectrum Analyzer	Keysight	N9020A	MY53420874	2023/05/05	2024/05/04
3	Signal Generator	Agilent	N5182A	MY50142850	2023/05/05	2024/05/04
4	Signal Generator	Agilent	N5182A	MY52420355	2023/05/05	2024/05/04
5	Power measurement module	TSTPASS	TSPS2023R	TSCB220016	2023/05/05	2024/05/04
6	WIDEBAND RADIO COMMUNICATION TESTER	RS	CMW500	1201.0002K50-107930-CD	2023/05/05	2024/05/04
7	Temperature/Humidity Meter	Ji Yu	MC501	/	2023/05/09	2024/05/08
8	Temperature Humidity chamber	Kingbo	TLHW-64B	/	2023/05/06	2024/05/05

Test Software	
Name of Software	Version
TST-PASS	V2.0

Transmitter spurious emissions & Receiver spurious emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
1	Double cone logarithmic antenna	Schwarzbeck	VULB 9168	824	2023/02/13	2026/02/12
2	Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2021/12/23	2024/12/22
3	Amplifier	Agilent	8449B	3008A02306	2023/05/04	2024/05/03
4	Amplifier	Brief&Smart	LNA-4018	2104197	2023/05/05	2024/05/04
5	Spectrum Analyzer	RS	FSP	1164.4391.38	2023/05/05	2024/05/04

3 TEST ITEM AND RESULTS

3.1 RF Output Power

Limit

ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.2.3

TEST CONDITION	LIMIT
Normal and Extreme	20dBm(e.i.r.p)

Test Procedure

- Step 1: Use a fast power sensor suitable for 2,4 GHz and capable of minimum 1 MS/s. Use the following settings:
 - Sample speed 1 MS/s or faster.
 - The samples shall represent the RMS power of the signal.
 - Measurement duration: For non-adaptive equipment: equal to the observation period. For adaptive equipment, the measurement duration shall be long enough to ensure a minimum number of bursts (at least 10) are captured.

NOTE 1: For adaptive equipment, to increase the measurement accuracy, a higher number of bursts may be used.

- Step 2: For conducted measurements on devices with one transmit chain:
 - Connect the power sensor to the transmit port, sample the transmit signal and store the raw data. Use these stored samples in all following steps.

For conducted measurements on devices with multiple transmit chains:

- Connect one power sensor to each transmit port for a synchronous measurement on all transmits ports.
- Trigger the power sensors so that they start sampling at the same time. Make sure the time difference between the samples of all sensors is less than 500 ns.
- For each individual sampling point (time domain), sum the coincident power samples of all ports and store them. Use these summed samples in all following steps.
- Step 3: Find the start and stop times of each burst in the stored measurement samples. The start and stop times are defined as the points where the power is at least 30 dB below the highest value of the stored samples in step 2.

NOTE 2: In case of insufficient dynamic range, the value of 30 dB may need to be reduced appropriately.

- Step 4: Between the start and stop times of each individual burst calculate the RMS power over the burst using the formula below. Save these P_{burst} values, as well as the start and stop times for each burst.

$$P_{burst} = \frac{1}{K} \sum_{n=1}^k P_{sample}(n)$$

With 'k' being the total number of samples and 'n' the actual sample number

- Step 5: The highest of all P_{burst} values (value "A" in dBm) will be used for maximum e.i.r.p. calculations.
- Step 6: Add the (stated) antenna assembly gain "G" in dBi of the individual antenna. If applicable, add the additional beamforming gain "Y" in dB using the formula below:

$$P = A + G + Y$$

Test Results

Raw data reference to Section 1 from CTL2312127041-W_2.4G_WIFI_Appendix.

3.2 Power Spectral Density

Limit

ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.3.3

TEST CONDITION	LIMIT
Normal	10dBm / MHz

Remark: Power Spectral Density is not applicable to HFSS system device.

Test Procedure

Step 1: Connect the UUT to the spectrum analyzer and use the following settings:

Start Frequency:	2 400 MHz
Stop Frequency:	2 483,5 MHz
Resolution BW:	10 kHz
Video BW:	30 kHz
Sweep Points:	> 8 350
Detector:	RMS
Trace Mode:	Max Hold
Sweep time:	10 s

- **Step 2:** Add up the values for power for all the samples in the file using the formula below:

$$P_{Sum} = \sum_{n=1}^k P_{sample}(n)$$

with 'k' being the total number of samples and 'n' the actual sample number

- **Step 3:** Normalize the individual values for power (in dBm) so that the sum is equal to the RF Output Power (e.i.r.p.) measured and save the corrected data. The following formulas used:

$$P_{Samplecorr}(n) = P_{Sample}(n) - C_{Corr}$$

with 'n' being the actual sample number

- **Step 4:** Starting from the first sample $P_{Samplecorr}(n)$ (lowest frequency), add up the power (in mW) of the following samples representing a 1 MHz segment and record the results for power and position (i.e. sample #1 to sample #100). This is the Power Spectral Density (e.i.r.p.) for the first 1 MHz segment and recorded.
- **Step 5:** Shift the start point of the samples added up in step 4 by one sample and repeat the procedure in step 4 (i.e. sample #2 to sample #101).
- **Step 6:** Repeat step 5 until the end of the data set and record the Power Spectral Density values for each of the 1 MHz segments.
- **Step 7:** For smart antenna systems repeat the measurement for each of the transmit ports. For each sampling point (frequency domain), add up the coincident power values (in mW) for the different transmit chains.
- **Step 8:** Record the highest value of the maximum Power Spectral Density for the UUT and compare it with the limit.

Test Result

Raw data reference to Section 2 from CTL2312127041-W_2.4G_WIFI_Appendix.

3.3 Duty Cycle, Tx-sequence, Tx-gap

Limit

ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.4.3

1. For non-adaptive FHSS equipment, the Duty Cycle shall be equal to or less than the maximum value declared by the supplier. In addition, the maximum Tx-sequence time shall be 5 ms while the minimum Tx-gap time shall be 5 ms.
2. For equipment using wide band modulations other than FHSS, the Duty Cycle shall be equal to or less than the maximum value declared by the supplier.
The Tx-sequence time shall be equal to or less than 10 ms. The minimum Tx-gap time following a Tx-sequence shall be equal to the duration of that preceding Tx-sequence with a minimum of 3,5 ms.

Test Procedure

The test procedure, which shall only be performed for non-adaptive systems, shall be as follows:

- **Step 1:** Use the same stored measurement samples from the procedure described in RF output power measurement
- **Step 2:** Between the saved start and stop times of each individual burst, calculate the TxOn time. Save these TxOn values.
- **Step 3:** All TxOn times between the end of the first gap (which is the start of the first burst within the observation period) and the start of the last burst (within this observation period) divided by the observation period.
- **Step 4:**
Identify any TxOff time that is equal to or greater than the minimum Tx-gap time. These are the potential valid gap times to be further considered in this procedure.

Starting from the second identified gap, calculate the time from the start of this gap to the end of the preceding gap. This time is the Tx-sequence time for this transmission. Repeat this procedure until the last identified gap in the observation period is reached.

Test Results

Not applicable to this device which was adaptive equipment and cannot operate in a non-adaptive mode.

3.4 Medium Utilisation (MU) factor

Limit

ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.5.3

The maximum Medium Utilisation factor for non-adaptive equipment shall be 10 %.

Definition

The Medium Utilisation (MU) factor is a measure to quantify the amount of resources (Power and Time) used by non-adaptive equipment. The Medium Utilisation factor is defined by the formula:

$$\text{MU} = (P/100 \text{ mW}) \times \text{DC}$$

Where: MU is Medium Utilisation factor in %.

P is the RF output power expressed in mW.

DC is the Duty Cycle expressed in %.

NOTE: The equipment may have dynamic behaviour with regard to duty cycle and corresponding power level.

Test Results

Not applicable to this device which cannot operation in a non-adaptive mode.

3.5 Occupied Channel Bandwidth

Limit

ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.7.3

The Occupied Channel Bandwidth for each hopping frequency shall fall completely within the band 2.4GHz-2.4835GHz.

Test Procedure

1. The measurement shall be performed only on the lowest and the highest frequency within stated frequency range
2. The test procedure shall be follows:

Step1: Connect the UUT to the spectrum analyzer and use the following settings

Centre Frequency:	The centre frequency of the channel under test
Resolution BW:	~ 1% of the span without going below 1 %
Video BW:	3 × RBW
Frequency Span:	2 × Occupied Channel Bandwidth (e.g. 40 MHz for a 20 MHz channel)
Detector Mode:	RMS
Trace Mode:	MaxHold
Sweep time:	1s

Step 2: Wait until the trace is completed. Find the peak value of the trace and place the analyzer marker on this peak.

Step 3: Use the 99 % bandwidth function of the spectrum analyzer to measure the Occupied Channel Bandwidth of the EUT.

Test Result

Raw data reference to Section 4 from CTL2312127041-W_2.4G_WIFI_Appendix.

3.6 Transmitter unwanted emissions in the out-of-band domain

Limit

ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.8.3

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 1.

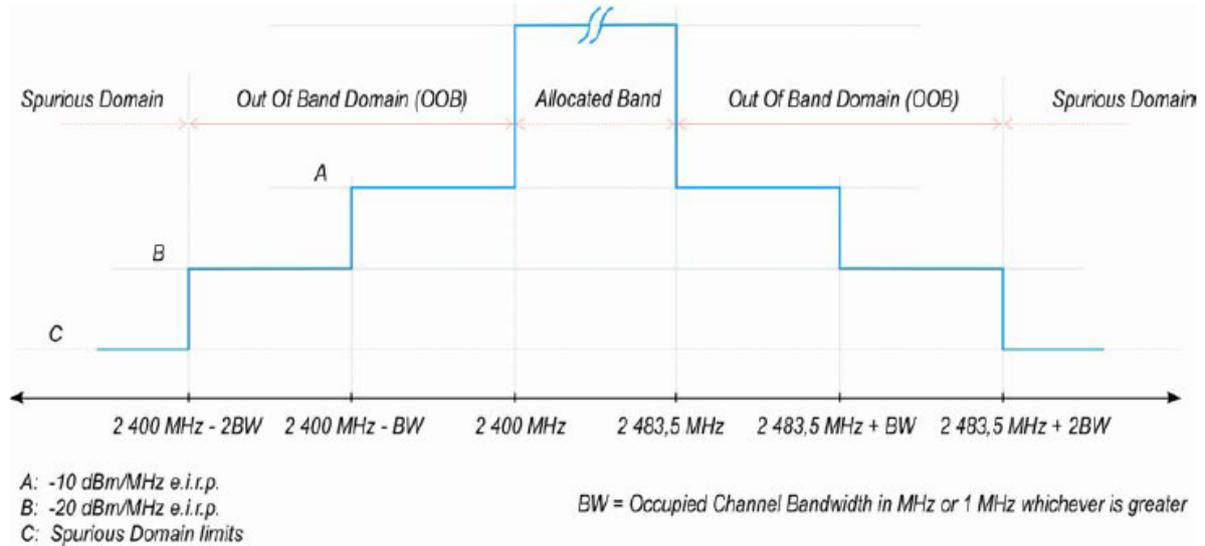


Figure 1: Transmit mask

Test Procedure

1. The measurements shall be performed at both normal environmental conditions and at the extremes of the operating temperature range.
2. For conducted measurements on devices with multiple transmit chains using the results for each of the transmit chains for the corresponding 1MHz segments shall be added and compared with the transmit mask limit.
3. The analyzer shall be set as follows:

Centre Frequency:	Center of each segments
Frequency Span:	0 Hz
RBW:	1M
VBW:	3M
Filter mode:	Channel filter
Trace Mode:	Clear / Write
Detector Mode:	RMS
Number of sweep points:	5 000
Sweep mode:	Continuous
Trigger:	Video trigger
Sweep Time:	> 120 % of the duration of the longest burst detected

4. Save the value measured of each segments.

Test Result

Raw data reference to Section 5 from CTL2312127041-W_2.4G_WIFI_Appendix.

3.7 Transmitter unwanted emissions in the spurious domain

Limit

ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.9.3

The transmitter unwanted emissions in the spurious domain shall not exceed the values given in table

Table 1: Transmitter limits for spurious emissions


Frequency Range	Maximum power	
	e.r.p.(≤ 1 GHz)	e.i.r.p.(> 1 GHz)
Bandwidth		
30 MHz to 47 MHz	-36 dBm	100 KHz
47 MHz to 74 MHz	-54 dBm	100 KHz
74MHz to 87.5 MHz	-36 dBm	100 KHz
87.5 MHz to 118 MHz	-54 dBm	100 KHz
118 MHz to 174 MHz	-36 dBm	100 KHz
174 MHz to 230 MHz	-54 dBm	100 KHz
230 MHz to 470 MHz	-36 dBm	100 KHz
470 MHz to 694 MHz	-54 dBm	100 KHz
694 MHz to 1GHz	-36 dBm	100 KHz
1 GHz to 12.75GHz	-30 dBm	1 MHz

Test Procedure

1. The measurement performed at the lowest and the highest channel on which the equipment can operate.
2. The EUT was placed on a turntable with 1.5m height.
3. The test distance between the receiving antenna and the EUT is 3 meter, while the receiving (test) antenna is kept at 1.5 meter height.
4. Set EUT in continuous transmitting with maximum output power.
5. The table was rotated from 0 to 360 degree to search the highest radiated emission.
6. Repeat step 3 to 5 for each polarization and channel to find the worst emission level.
7. The results obtained are compared to the limits in order to prove compliance with the requirement.

Test Configuration

Effective Radiated Power measurement (30 MHz to 12.75 GHz)

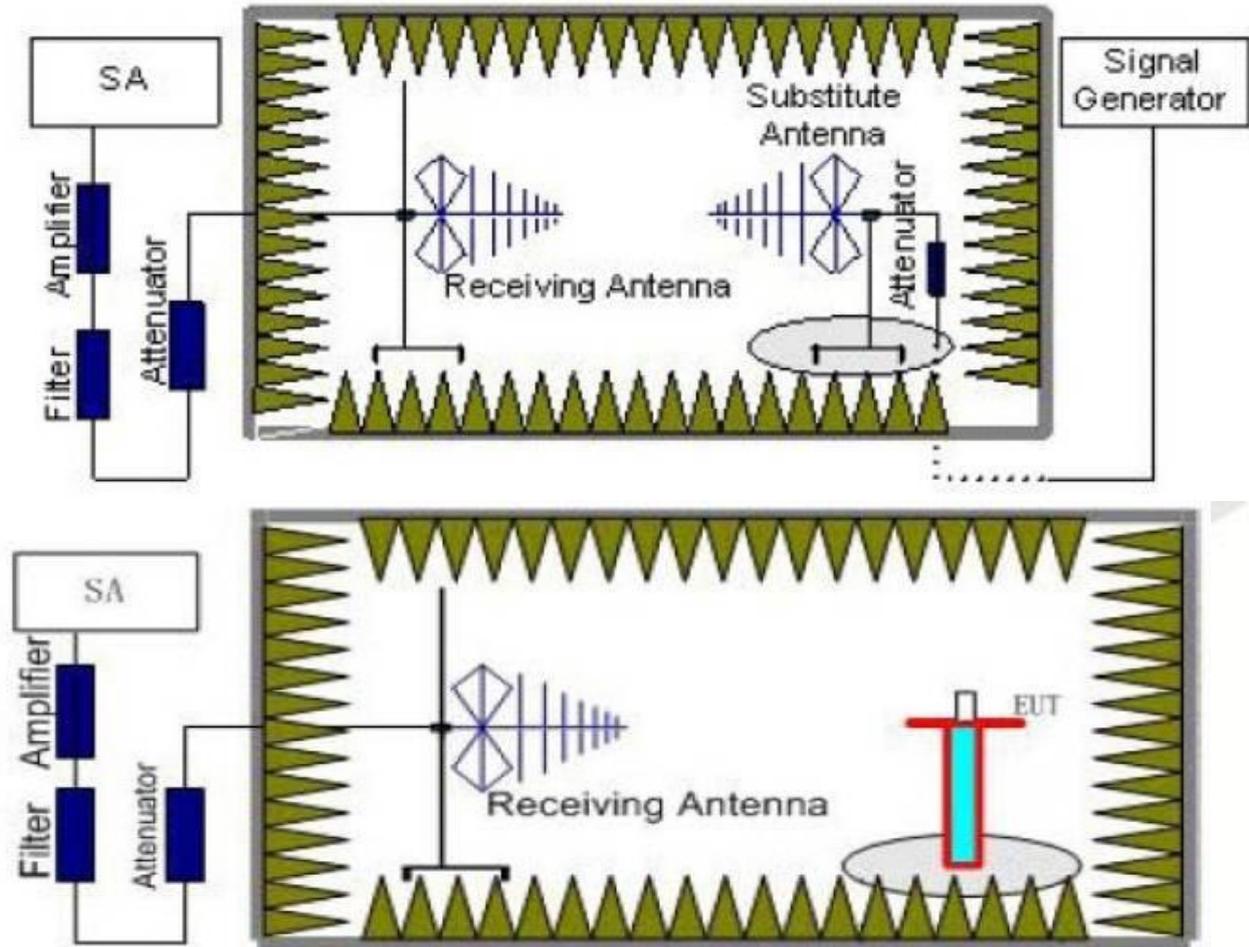

Test Results


Remark: We test all modulation type, and recorded the worst case at 802.11b mode Antenna 1.

802.11b

Channel: CH01 Polarity: Horizontal



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

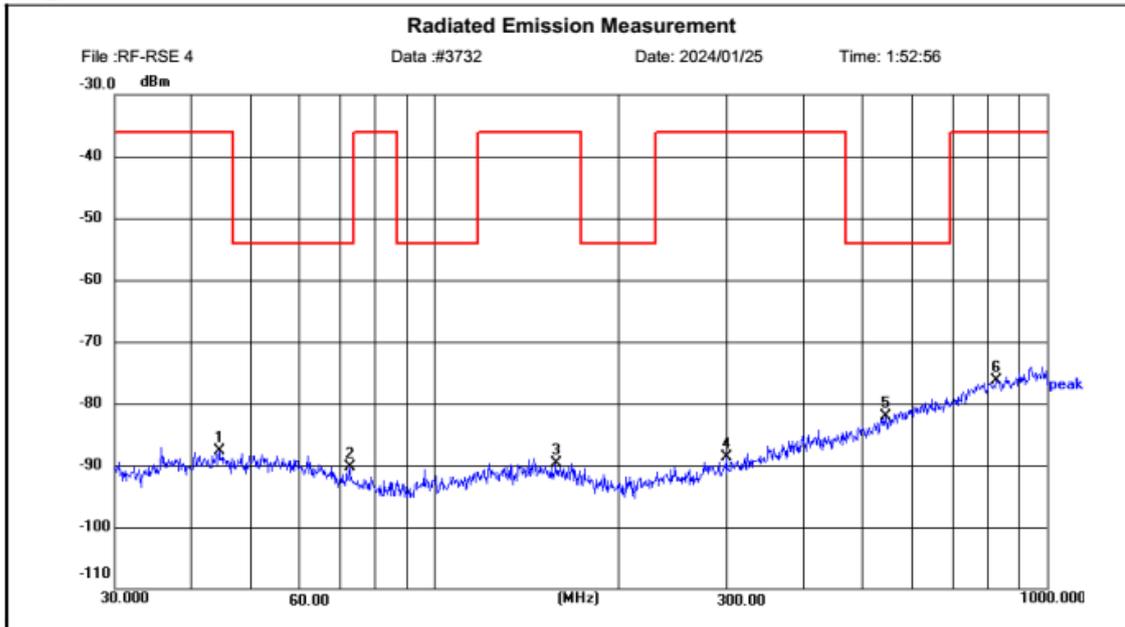


Site LAB Chamber 2 Polarization: **Horizontal** Temperature: 25(C)
 Limit: ETSI EN300328TX(RF) Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N: Aiper Surfer S1
 Mode: WIFI2.4G 2412MHz TX
 Note: Shenzhen Aiper Intelligent Co.,Ltd.

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	44.5673	-64.30	-23.48	-87.78	-36.00	51.78	peak	150	360	P	
2	72.6553	-63.01	-27.22	-90.23	-54.00	36.23	peak	150	360	P	
3	157.6971	-63.73	-25.92	-89.65	-36.00	53.65	peak	150	360	P	
4	299.4471	-62.96	-25.83	-88.79	-36.00	52.79	peak	150	360	P	
5	546.3787	-62.50	-19.65	-82.15	-54.00	28.15	peak	150	360	P	
6	827.8562	-62.67	-13.55	-76.22	-36.00	40.22	peak	150	360	P	



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

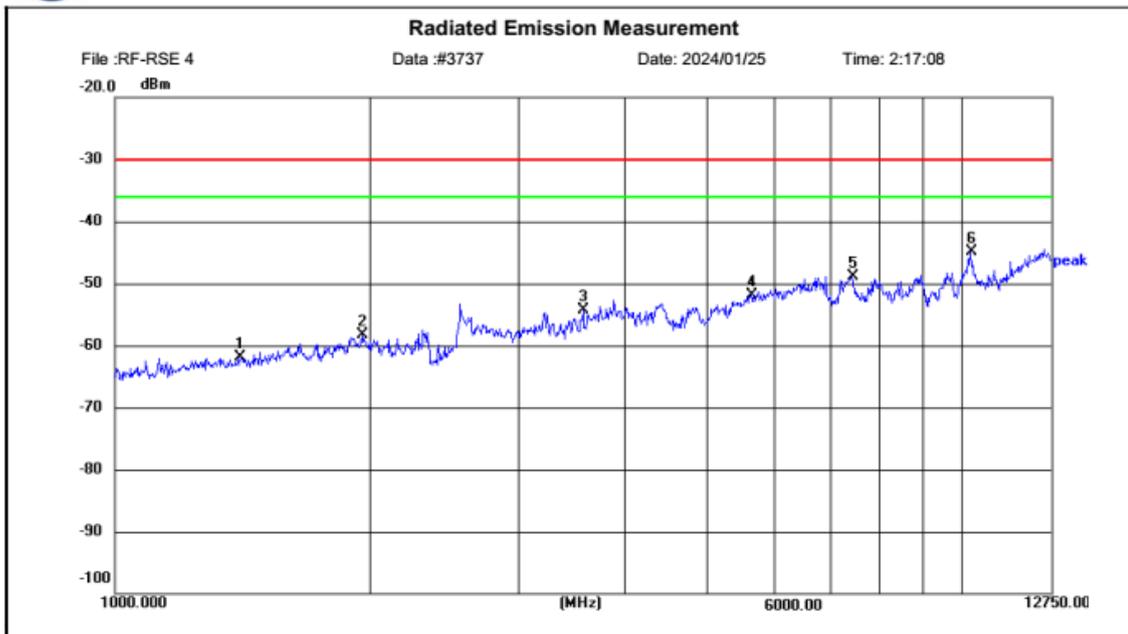


Site LAB Chamber 2	Polarization: <i>Horizontal</i>	Temperature: 25(C)
Limit: ETSI EN300328TX(RF)	Power:	Humidity: 50 %
EUT:	Distance: 3m	
M/N: Aiper Surfer S1		
Mode: WIFI2.4G 2412MHz TX		
Note: Shenzhen Aiper Intelligent Co.,Ltd.		

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1405.601	-51.39	-10.43	-61.82	-30.00	31.82	peak	150	235	P	
2	1966.306	-52.02	-6.34	-58.36	-30.00	28.36	peak	150	281	P	
3	3571.851	-55.35	0.98	-54.37	-30.00	24.37	peak	150	272	P	
4	5642.487	-57.58	5.66	-51.92	-30.00	21.92	peak	150	94	P	
5	7423.168	-58.27	9.39	-48.88	-30.00	18.88	peak	150	322	P	
6	10252.998	-56.25	11.30	-44.95	-30.00	14.95	peak	150	281	P	

Channel: CH01 Polarity: Vertical



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

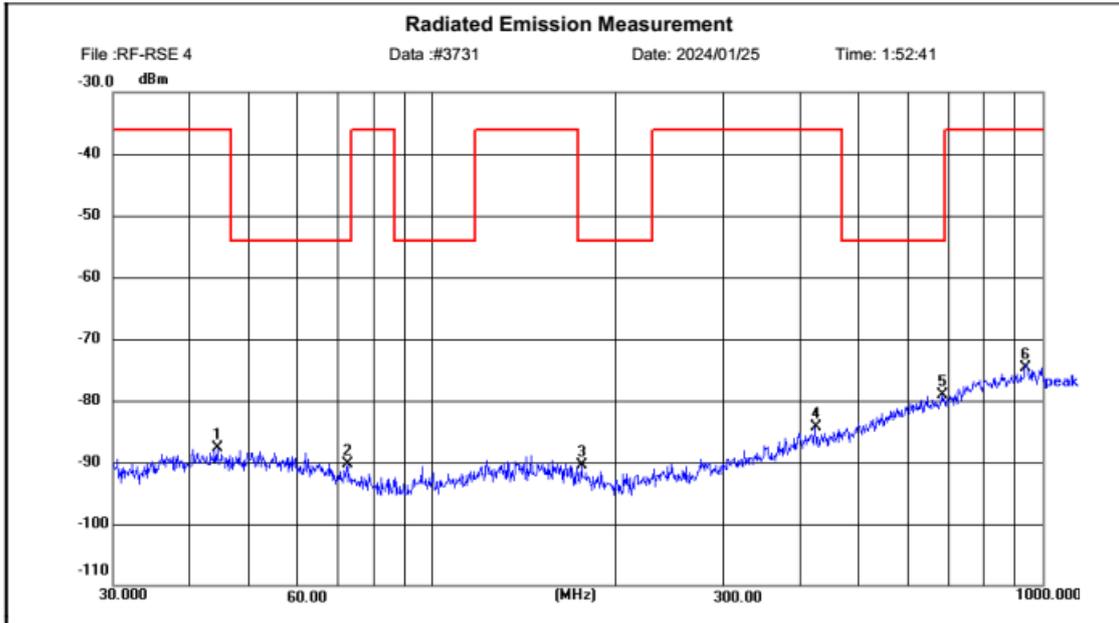


Site LAB Chamber 2 Polarization: **Vertical** Temperature: 25(C)
Limit: ETSI EN300328TX(RF) Power: Humidity: 50 %
EUT: Distance: 3m
M/N:Aiper Surfer S1
Mode: WIFI2.4G 2412MHz TX
Note: Shenzhen Aiper Intelligent Co.,Ltd.

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	44.5673	-64.30	-23.48	-87.78	-36.00	51.78	peak	150	360	P	
2	72.6553	-63.01	-27.22	-90.23	-54.00	36.23	peak	150	360	P	
3	175.9598	-63.02	-27.40	-90.42	-54.00	36.42	peak	150	360	P	
4	424.8418	-62.14	-22.14	-84.28	-36.00	48.28	peak	150	360	P	
5	686.2476	-62.37	-16.64	-79.01	-54.00	25.01	peak	150	360	P	
6	937.1881	-62.22	-12.44	-74.66	-36.00	38.66	peak	150	360	P	



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

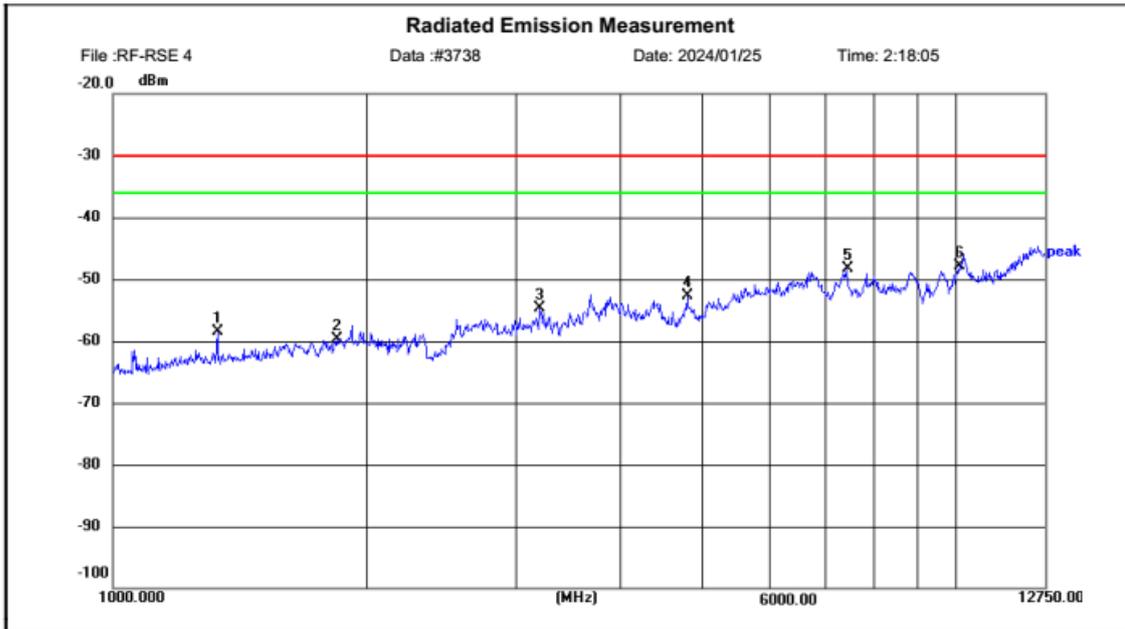

Site: LAB Chamber 2 Polarization: **Vertical** Temperature: 25(C)
 Limit: ETSI EN300328TX(RF) Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N: Aiper Surfer S1
 Mode: WIFI2.4G 2412MHz TX
 Note: Shenzhen Aiper Intelligent Co.,Ltd.

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1331.164	-47.70	-10.77	-58.47	-30.00	28.47	peak	150	181	P	
2	1846.247	-52.54	-7.16	-59.70	-30.00	29.70	peak	150	172	P	
3	3215.814	-54.03	-0.65	-54.68	-30.00	24.68	peak	150	294	P	
4	4801.853	-56.33	3.57	-52.76	-30.00	22.76	peak	150	247	P	
5	7423.168	-57.59	9.39	-48.20	-30.00	18.20	peak	150	51	P	
6	10110.452	-59.88	12.00	-47.88	-30.00	17.88	peak	150	163	P	

802.11b

Channel:

CH13

Polarity:

Horizontal



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194


Radiated Emission Measurement

File :RF-RSE 4

Data :#3729

Date: 2024/01/25

Time: 1:51:54

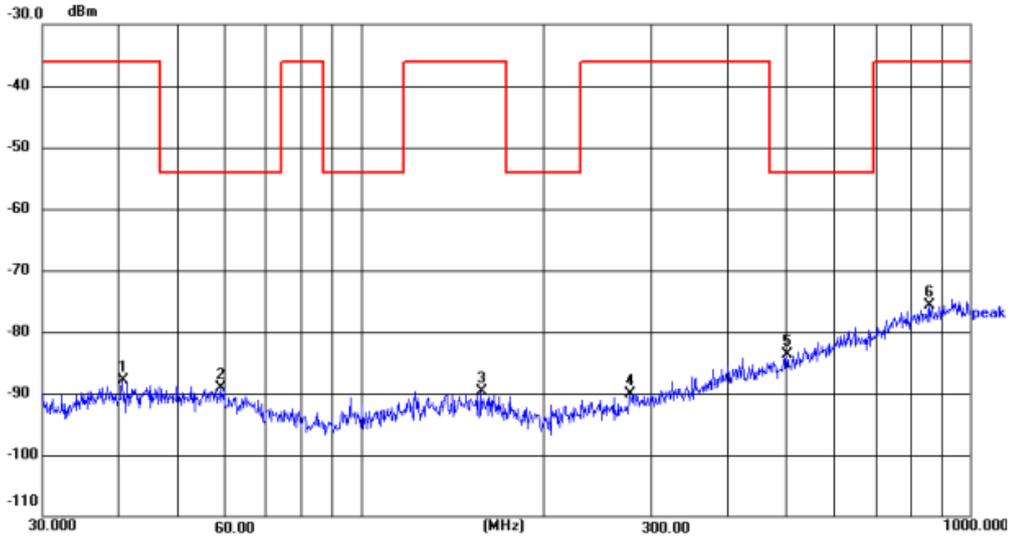

Site LAB Chamber 2

Polarization: *Horizontal*

Temperature: 25(C)

Limit: ETSI EN300328TX(RF)

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N: Aiper Surfer S1

Mode: WIFI2.4G 2472MHz TX

Note: Shenzhen Aiper Intelligent Co.,Ltd.


No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	40.6838	-64.45	-23.54	-87.99	-36.00	51.99	peak	150	360	P	
2	58.8959	-64.73	-24.43	-89.16	-54.00	35.16	peak	150	360	P	
3	157.6971	-63.73	-25.92	-89.65	-36.00	53.65	peak	150	360	P	
4	277.3365	-63.81	-26.38	-90.19	-36.00	54.19	peak	150	360	P	
5	500.7399	-62.96	-20.78	-83.74	-54.00	29.74	peak	150	360	P	
6	862.6780	-62.64	-13.06	-75.70	-36.00	39.70	peak	150	360	P	



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement

File :RF-RSE 4 Data :#3745 Date: 2024/01/25 Time: 2:31:58

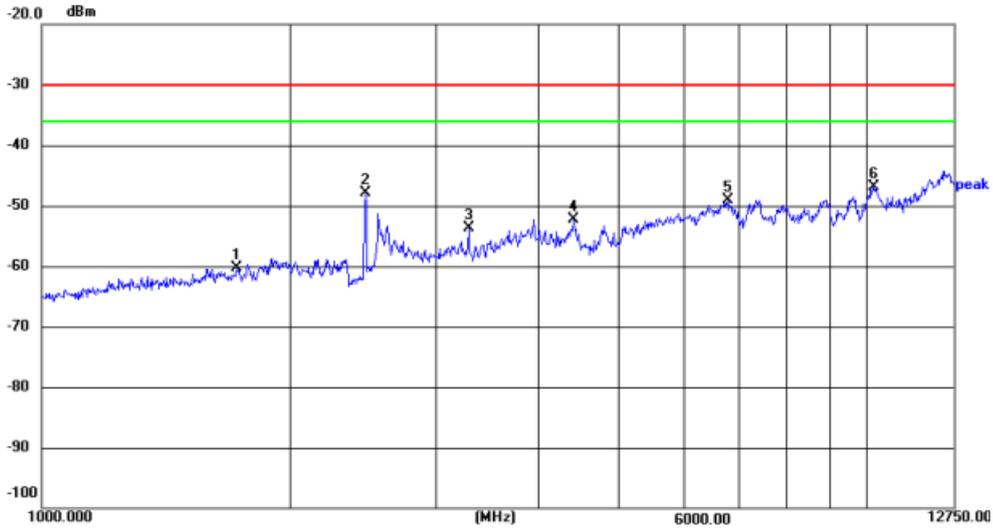


Site LAB Chamber 2 Polarization: *Horizontal* Temperature: 25(C)
 Limit: ETSI EN300328TX(RF) Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N: Aiper Surfer S1
 Mode: WIFI2.4G 2472MHz TX
 Note: Shenzhen Aiper Intelligent Co.,Ltd.

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1724.715	-51.95	-8.37	-60.32	-30.00	30.32	peak	150	10	P	
2	2470.988	-44.41	-3.41	-47.82	-30.00	17.82	peak	150	282	P	
3	3295.577	-53.08	-0.54	-53.62	-30.00	23.62	peak	150	338	P	
4	4410.750	-55.52	3.14	-52.38	-30.00	22.38	peak	150	282	P	
5	6781.779	-58.91	9.75	-49.16	-30.00	19.16	peak	150	319	P	
6	10181.476	-58.55	11.65	-46.90	-30.00	16.90	peak	150	216	P	

Channel: CH13 Polarity: Vertical



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

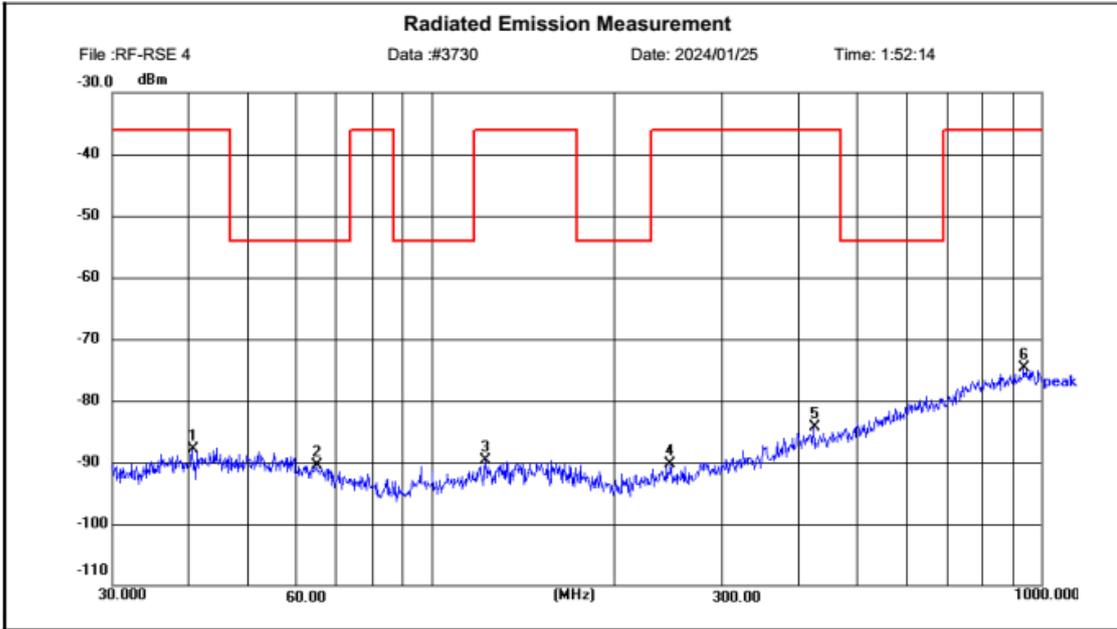


Site LAB Chamber 2 Polarization: **Vertical** Temperature: 25(C)
 Limit: ETSI EN300328TX(RF) Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N: Aiper Surfer S1
 Mode: WIFI2.4G 2472MHz TX
 Note: Shenzhen Aiper Intelligent Co.,Ltd.

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	40.6838	-64.45	-23.54	-87.99	-36.00	51.99	peak	150	360	P	
2	64.7445	-65.02	-25.55	-90.57	-54.00	36.57	peak	150	360	P	
3	122.8878	-63.48	-26.26	-89.74	-36.00	53.74	peak	150	360	P	
4	247.2480	-63.47	-26.82	-90.29	-36.00	54.29	peak	150	360	P	
5	424.8418	-62.14	-22.14	-84.28	-36.00	48.28	peak	150	360	P	
6	937.1881	-62.22	-12.44	-74.66	-36.00	38.66	peak	150	360	P	



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

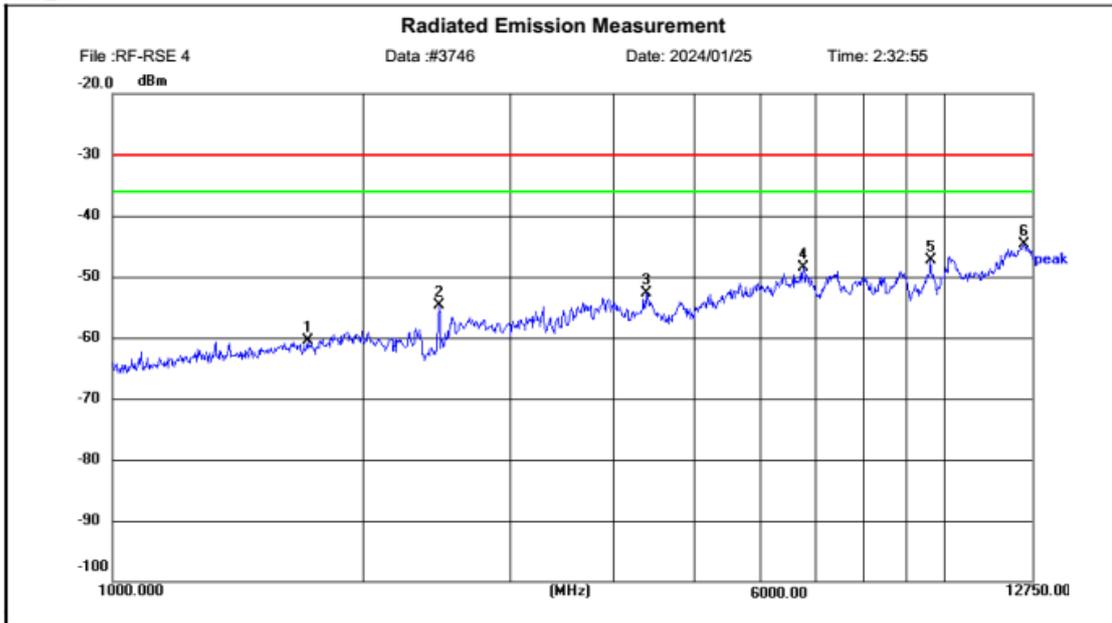

Site LAB Chamber 2 Polarization: **Vertical** Temperature: 25(C)
 Limit: ETSI EN300328TX(RF) Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N:Aiper Surfer S1
 Mode: WIFI2.4G 2472MHz TX
 Note: Shenzhen Aiper Intelligent Co.,Ltd.

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1719.236	-52.18	-8.41	-60.59	-30.00	30.59	peak	150	5	P	
2	2473.348	-51.27	-3.40	-54.67	-30.00	24.67	peak	150	350	P	
3	4379.982	-55.85	3.06	-52.79	-30.00	22.79	peak	150	257	P	
4	6773.153	-58.17	9.70	-48.47	-30.00	18.47	peak	150	163	P	
5	9620.843	-59.14	11.81	-47.33	-30.00	17.33	peak	150	350	P	
6	12489.007	-59.19	14.40	-44.79	-30.00	14.79	peak	150	266	P	

3.8 Receiver spurious emissions

LIMIT

ETSI EN 300 328 (V2.2.2) Sub-clause 4.3.2.10.3

The spurious emissions of the receiver shall not exceed the values given below:

Spurious emission limits for receivers


Frequency	Maximum power, e.r.p.	Measurement bandwidth
30 MHz to 1 GHz	-57 dBm	100 KHz
30 MHz to 12.75 GHz	-47 dBm	1 MHz

Test Procedure

The same as clause 3.7

Test Configuration

Effective Radiated Power measurement (30 MHz to 12.75 GHz)

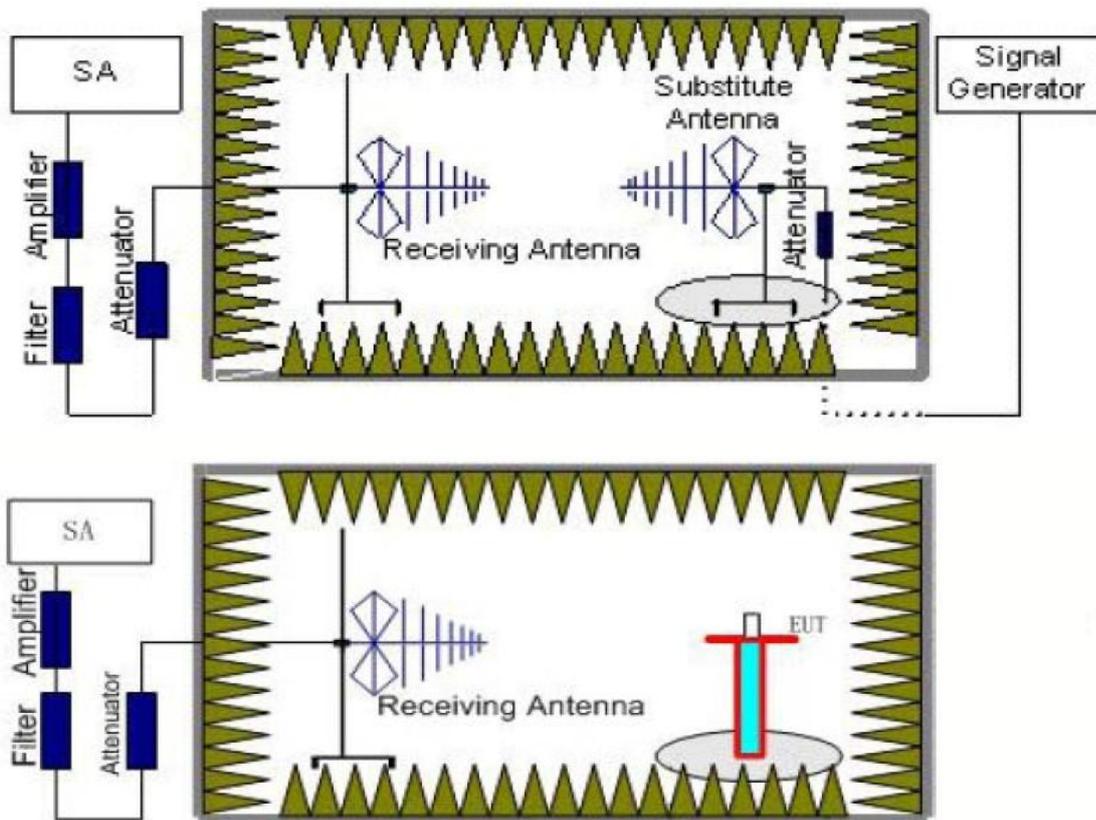

Test Results


Remark: We test all modulation type, and recorded the worst case at 802.11b mode Antenna 1.

802.11b

Channel: CH01 Polarity: Horizontal



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

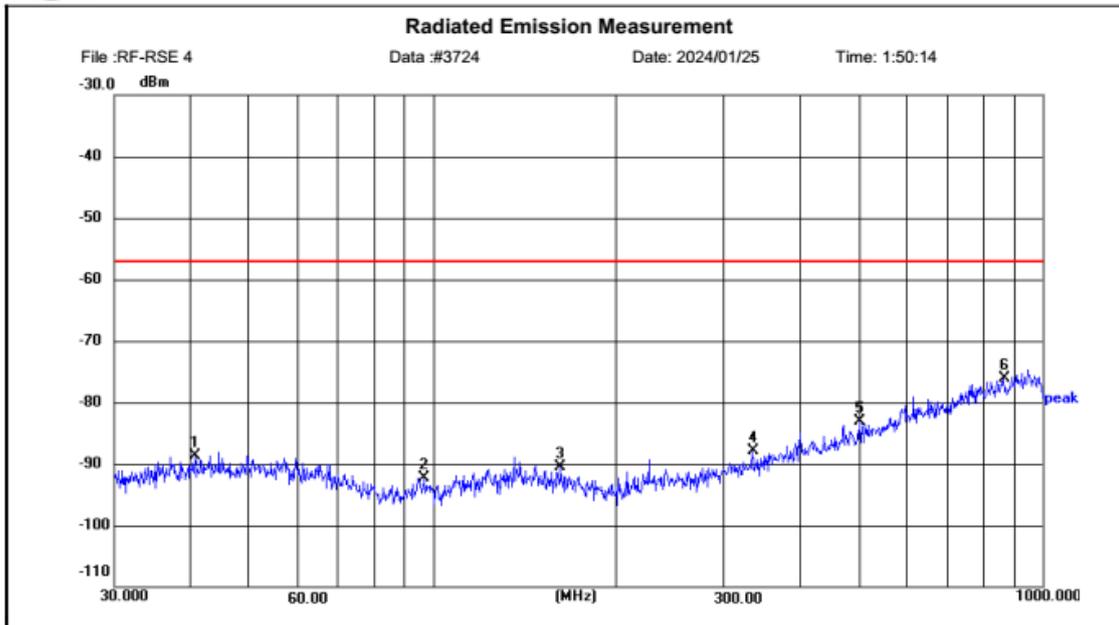

File :RF-RSE 4 Data :#3724 Date: 2024/01/25 Time: 1:50:14

Site LAB Chamber 2 Polarization: **Horizontal** Temperature: 25(C)
 Limit: ETSI EN300328RX(RF) Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N: Aiper Surfer S1
 Mode: WIFI2.4G 2412MHz RX
 Note: Shenzhen Aiper Intelligent Co.,Ltd.

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	40.7730	-65.20	-23.56	-88.76	-57.00	31.76	peak	150	360	P	
2	96.9872	-64.13	-28.11	-92.24	-57.00	35.24	peak	150	360	P	
3	162.3257	-64.13	-26.37	-90.50	-57.00	33.50	peak	150	360	P	
4	333.9794	-62.87	-25.02	-87.89	-57.00	30.89	peak	150	360	P	
5	502.9395	-62.41	-20.76	-83.17	-57.00	26.17	peak	150	360	P	
6	864.1919	-63.13	-13.03	-76.16	-57.00	19.16	peak	150	360	P	



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194


Radiated Emission Measurement

File :RF-RSE 4

Data :#3733

Date: 2024/01/25

Time: 2:10:17

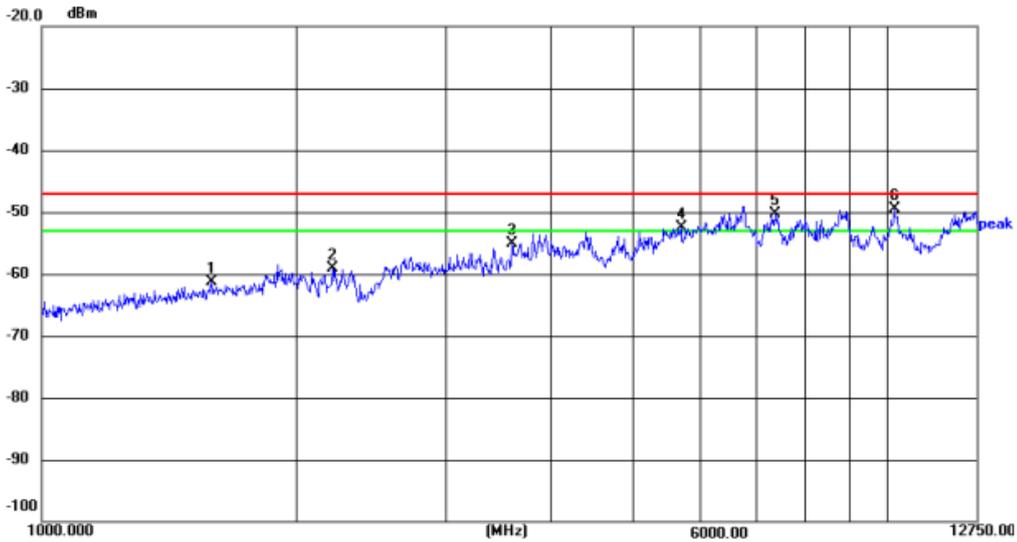

Site LAB Chamber 2

Limit: ETSI EN300328RX(RF)

EUT:

M/N: Aiper Surfer S1

Mode: WIFI2.4G 2412MHz RX

Note: Shenzhen Aiper Intelligent Co.,Ltd.

Polarization: *Horizontal*

Temperature: 25(C)

Power:

Humidity: 50 %

Distance: 3m


No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1591.819	-52.53	-8.85	-61.38	-47.00	14.38	peak	150	360	P	
2	2209.165	-53.33	-5.76	-59.09	-47.00	12.09	peak	150	360	P	
3	3600.377	-56.22	1.06	-55.16	-47.00	8.16	peak	150	360	P	
4	5714.761	-58.24	5.65	-52.59	-47.00	5.59	peak	150	360	P	
5	7371.385	-60.19	9.84	-50.35	-47.00	3.35	peak	150	360	P	
6	10194.442	-61.15	11.59	-49.56	-47.00	2.56	peak	150	360	P	

Channel: CH01 Polarity: Vertical



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement

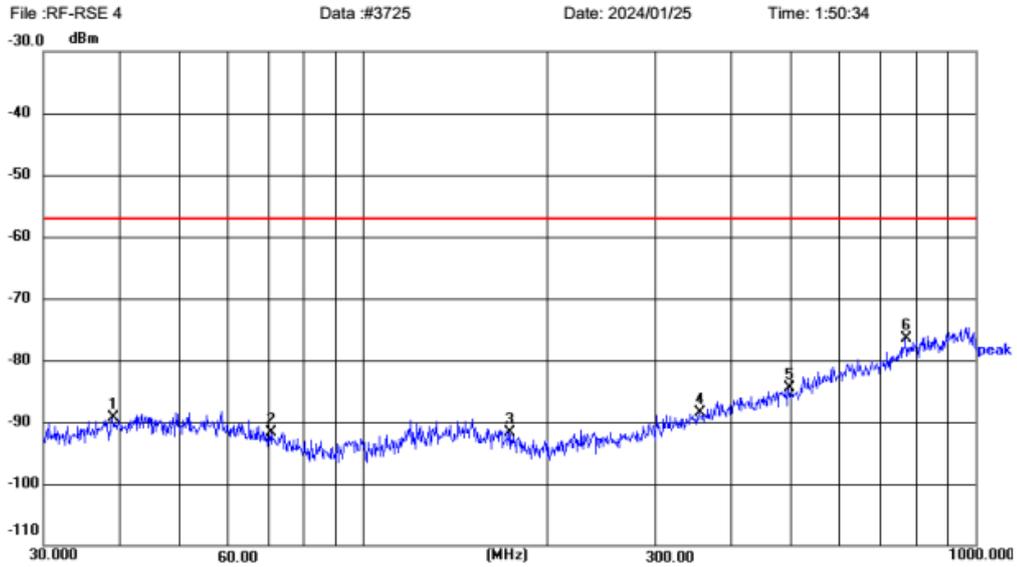


Site LAB Chamber 2 Polarization: **Vertical** Temperature: 25(C)
 Limit: ETSI EN300328RX(RF) Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N: Aiper Surfer S1
 Mode: WIFI2.4G 2412MHz RX
 Note: Shenzhen Aiper Intelligent Co.,Ltd.

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	38.9220	-65.64	-23.68	-89.32	-57.00	32.32	peak	150	360	P	
2	70.5836	-64.53	-27.12	-91.65	-57.00	34.65	peak	150	360	P	
3	173.1292	-64.54	-27.14	-91.68	-57.00	34.68	peak	150	360	P	
4	353.0981	-63.94	-24.47	-88.41	-57.00	31.41	peak	150	360	P	
5	495.7171	-63.45	-20.97	-84.42	-57.00	27.42	peak	150	360	P	
6	770.0972	-61.96	-14.59	-76.55	-57.00	19.55	peak	150	360	P	



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

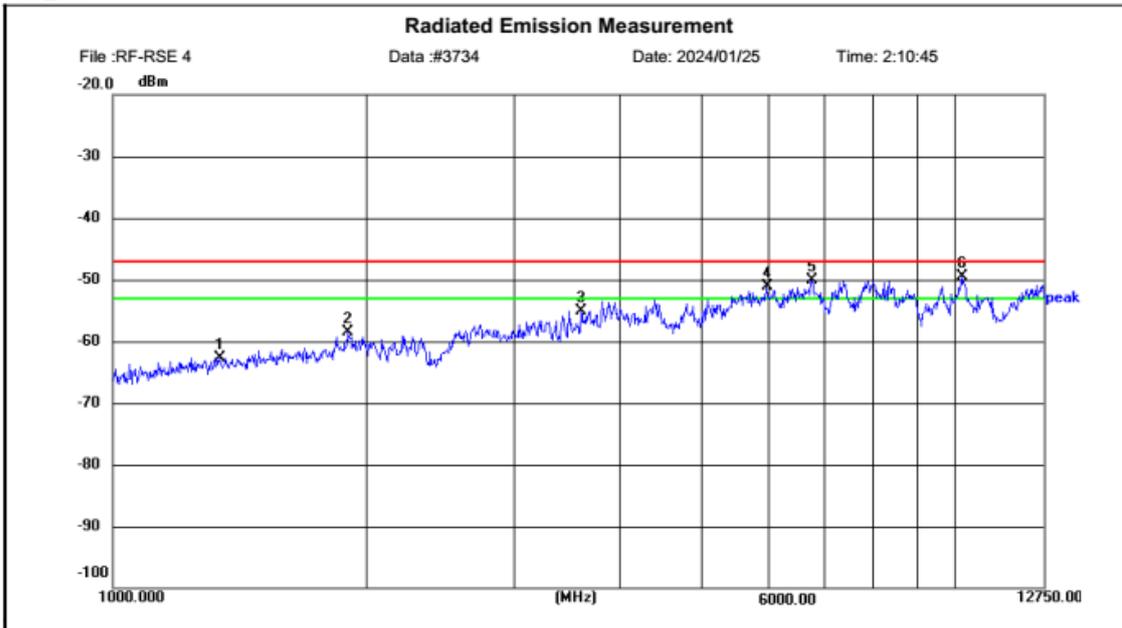

Site LAB Chamber 2 Limit: ETSI EN300328RX(RF) EUT: M/N: Aiper Surfer S1 Mode: WIFI2.4G 2412MHz RX Note: Shenzhen Aiper Intelligent Co.,Ltd.	Polarization: Vertical Power: Distance: 3m	Temperature: 25(C) Humidity: 50 %
--	---	--------------------------------------


No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1342.650	-51.92	-10.72	-62.64	-47.00	15.64	peak	150	360	P	
2	1902.908	-52.16	-6.36	-58.52	-47.00	11.52	peak	150	360	P	
3	3600.377	-56.22	1.06	-55.16	-47.00	8.16	peak	150	360	P	
4	5982.701	-57.64	6.50	-51.14	-47.00	4.14	peak	150	360	P	
5	6753.785	-59.65	9.55	-50.10	-47.00	3.10	peak	150	360	P	
6	10194.442	-61.15	11.59	-49.56	-47.00	2.56	peak	150	360	P	

802.11b

Channel: CH13 Polarity: Horizontal



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

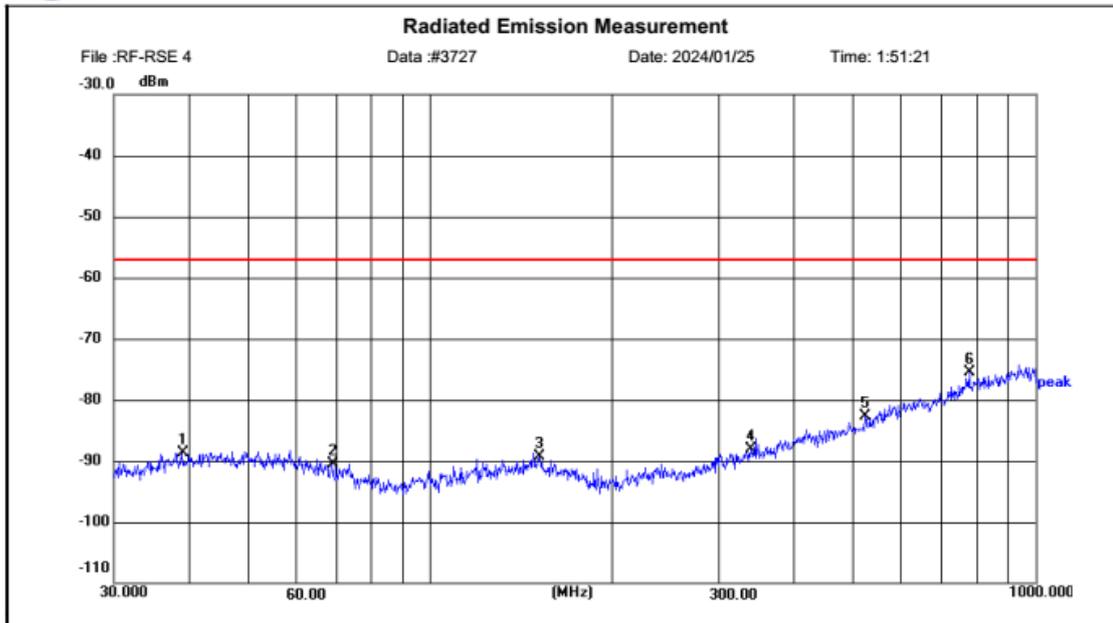


Site LAB Chamber 2 Polarization: *Horizontal* Temperature: 25(C)
 Limit: ETSI EN300328RX(RF) Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N: Aiper Surfer S1
 Mode: WIFI2.4G 2472MHz RX
 Note: Shenzhen Aiper Intelligent Co.,Ltd.

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	38.9903	-65.03	-23.65	-88.68	-57.00	31.68	peak	150	360	P	
2	69.1141	-63.76	-26.69	-90.45	-57.00	33.45	peak	150	360	P	
3	151.8632	-63.32	-26.02	-89.34	-57.00	32.34	peak	150	360	P	
4	339.2911	-63.10	-24.93	-88.03	-57.00	31.03	peak	150	360	P	
5	523.1764	-62.44	-20.22	-82.66	-57.00	25.66	peak	150	360	P	
6	779.2651	-61.35	-14.20	-75.55	-57.00	18.55	peak	150	360	P	



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

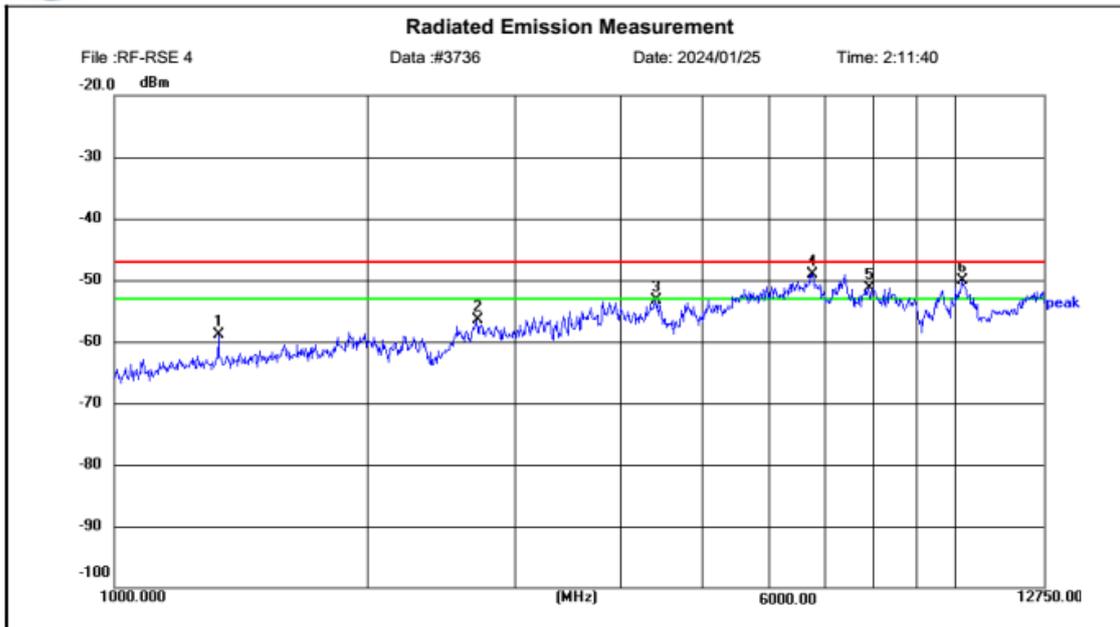


Site LAB Chamber 2 Polarization: *Horizontal* Temperature: 25(C)
 Limit: ETSI EN300328RX(RF) Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N: Aiper Surfer S1
 Mode: WIFI2.4G 2472MHz RX
 Note: Shenzhen Aiper Intelligent Co.,Ltd.

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1332.860	-48.19	-10.77	-58.96	-47.00	11.96	peak	150	360	P	
2	2702.962	-53.40	-3.14	-56.54	-47.00	9.54	peak	150	360	P	
3	4409.347	-56.56	3.18	-53.38	-47.00	6.38	peak	150	360	P	
4	6753.785	-58.65	9.55	-49.10	-47.00	2.10	peak	150	360	P	
5	7880.772	-59.92	8.67	-51.25	-47.00	4.25	peak	150	360	P	
6	10194.442	-61.65	11.59	-50.06	-47.00	3.06	peak	150	360	P	

Channel: CH13 Polarity: Vertical



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

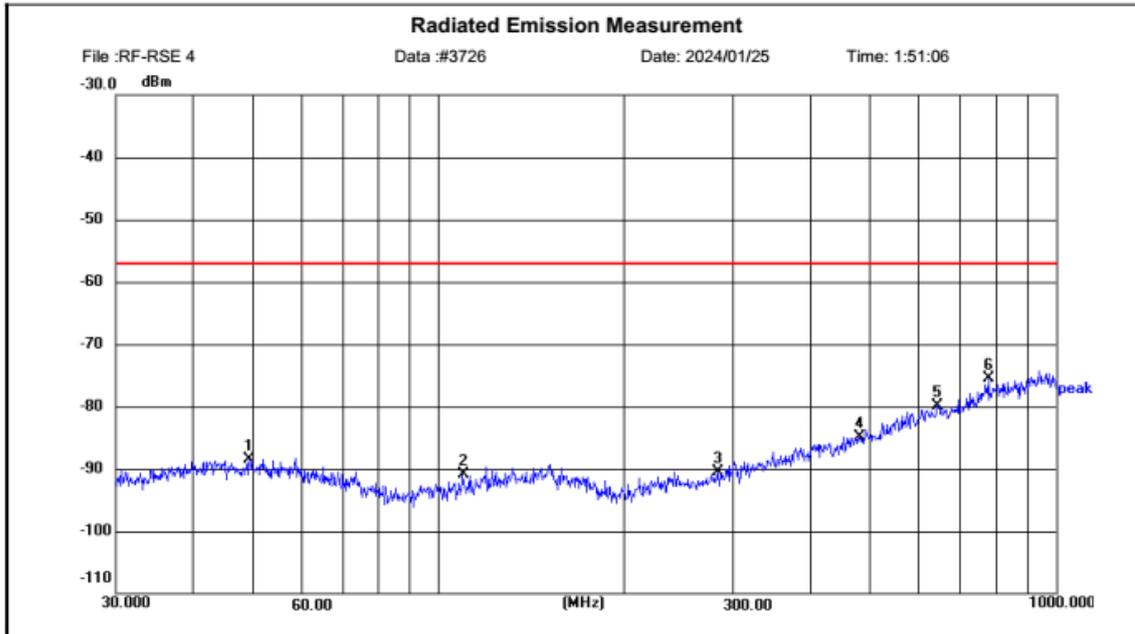


Site LAB Chamber 2 Polarization: **Vertical** Temperature: 25(C)
 Limit: ETSI EN300328RX(RF) Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N: Aiper Surfer S1
 Mode: WIFI2.4G 2472MHz RX
 Note: Shenzhen Aiper Intelligent Co.,Ltd.

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	49.4677	-64.70	-23.76	-88.46	-57.00	31.46	peak	150	360	P	
2	109.7479	-63.61	-27.24	-90.85	-57.00	33.85	peak	150	360	P	
3	282.9852	-64.22	-26.18	-90.40	-57.00	33.40	peak	150	360	P	
4	481.3708	-63.80	-21.17	-84.97	-57.00	27.97	peak	150	360	P	
5	644.2717	-63.03	-16.84	-79.87	-57.00	22.87	peak	150	360	P	
6	779.2651	-61.35	-14.20	-75.55	-57.00	18.55	peak	150	360	P	



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

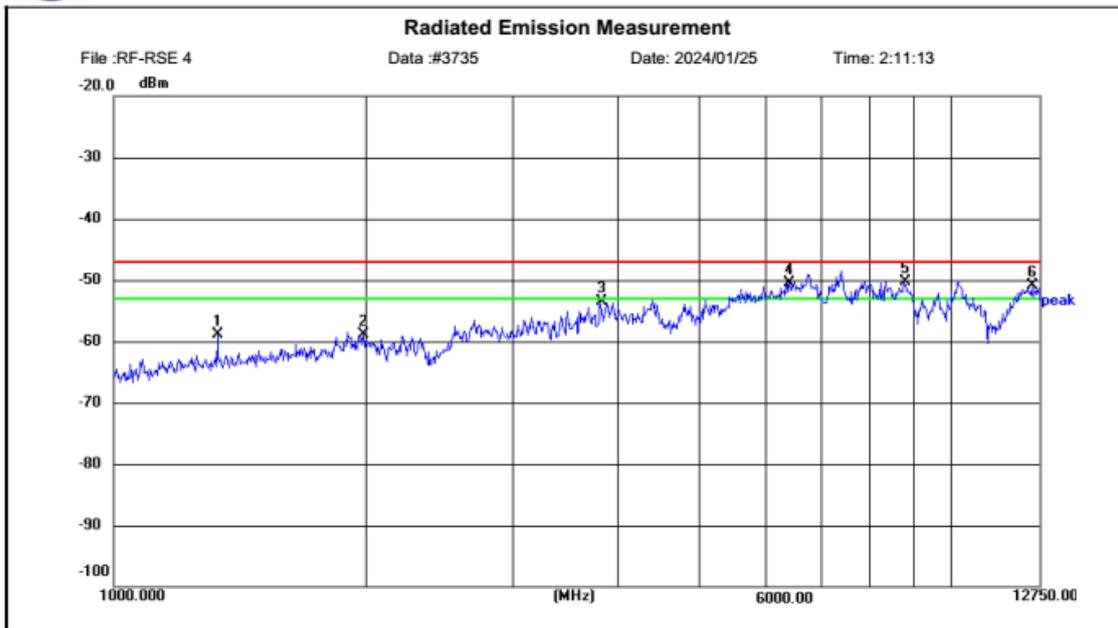

Site LAB Chamber 2 Polarization: *Vertical* Temperature: 25(C)
 Limit: ETSI EN300328RX(RF) Power: Humidity: 50 %
 EUT: Distance: 3m
 M/N: Aiper Surfer S1
 Mode: WIFI2.4G 2472MHz RX
 Note: Shenzhen Aiper Intelligent Co.,Ltd.

No.	Frequency (MHz)	Reading (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	1332.860	-48.19	-10.77	-58.96	-47.00	11.96	peak	150	360	P	
2	1990.859	-52.46	-6.34	-58.80	-47.00	11.80	peak	150	360	P	
3	3816.248	-55.66	2.16	-53.50	-47.00	6.50	peak	150	360	P	
4	6422.637	-58.30	7.88	-50.42	-47.00	3.42	peak	150	360	P	
5	8803.563	-60.09	9.85	-50.24	-47.00	3.24	peak	150	360	P	
6	12512.873	-65.36	14.42	-50.94	-47.00	3.94	peak	150	360	P	

3.9 Adaptivity

Limits

For Requirements and Limits please refer to ETSI EN 300 328 V2.2.2 Sub - clause 4.3.2.6.2 & 4.3.2.6.3.2.

Test Procedure


1. The measurement procedure follows the clause 5.4.6.2.1 of the ETSI EN 300 328 V2.2.2 (2019-07).
2. For conducted measurements on device with multiple transmit chains and receive chains. The power splitter/combiner shall be used to combine all the transmit/receive chains (antenna outputs) into a single test point. The insertion loss of the power splitter/combiner shall be taken into account.
3. Interference signal shall be a 100 % duty cycle interference signal is injected on the current operating channel of the UUT. This interference signal shall meet the requirements as follow:
The 99 % bandwidth (the bandwidth containing 99 % of the power) of this inference signal shall be within a range from 120 % to 200 % of the Occupied Channel Bandwidth of the UUT with a minimum of 5 MHz, while the difference between the lowest and highest level within the Occupied Channel Bandwidth of the UUT shall be maximum 4 dB.
4. Blocking signal shall be a 100 % duty cycle CW signal, and The frequency and level shall be set as follow:

Equipment Type (LBT / non- LBT)	Wanted signal mean power from companion device	Blocking signal frequency [MHz]	Blocking signal power [dBm]	Type of interfering signal
LBT	sufficient to maintain the link (see note 2)	2 395 or 2 488,5 (see note 1)	-35	CW
Non-LBT	-30 dB			

NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz.

NOTE 2: A typical value which can be used in most cases is -50 dBm/MHz.

5. The test not applicable to none-adaptive equipment and adaptive equipment which maximum RF Output power level is less than 10 dBm e.i.r.p.

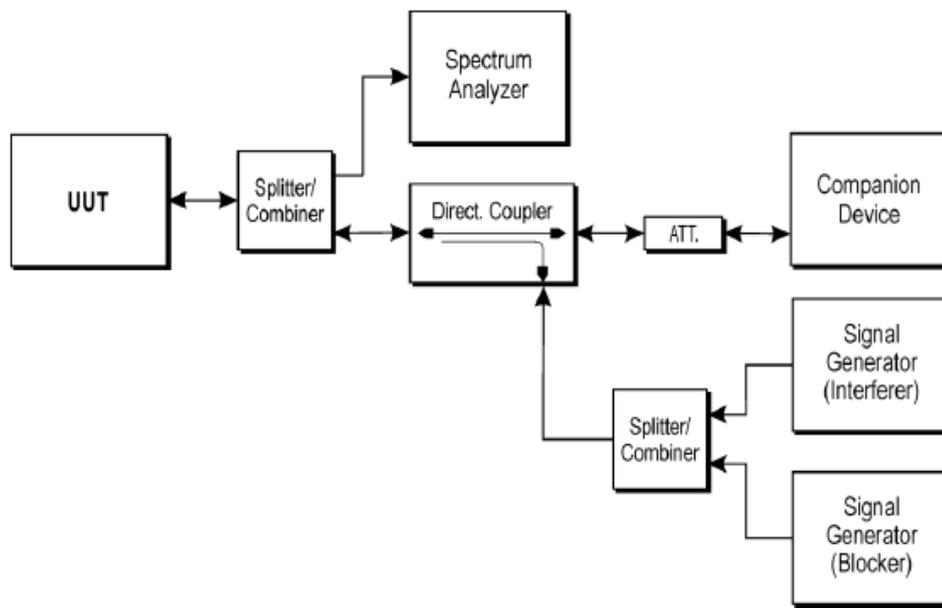Test Configuration**Test Results**

Raw data reference to Section 3 from CTL2312127041-W_2.4G_WIFI_Appendix.

3.10 Receiver Blocking

Limits

While maintaining the minimum performance criteria (The minimum performance criterion shall be a PER less than or equal to 10 %. The manufacturer may declare alternative performance criteria as long as that is appropriate for the intended use of the equipment), the blocking levels at specified frequency offsets shall be equal to or greater than the limits defined for the applicable receiver category provided in below:

Receiver blocking parameters for Receiver Category 1 equipment


Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
$(-133 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}))$ or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674		
NOTE 1: OCBW is in Hz.			
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\text{min}} + 26 \text{ dB}$ where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\text{min}} + 20 \text{ dB}$ where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

Receiver blocking parameters receiver category 2 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
$(-139 \text{ dBm} + 10 \times \log_{10}(\text{OCBW}) + 10 \text{ dB})$ or $(-74 \text{ dBm} + 10 \text{ dB})$ whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
NOTE 1: OCBW is in Hz.			
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\text{min}} + 26 \text{ dB}$ where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

Receiver blocking parameters receiver category 3 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139 dBm + $10 \times \log_{10}(\text{OCBW}) + 20 \text{ dB}$) or (-74 dBm + 20 dB) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW
NOTE 1: OCBW is in Hz.			
NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{\min} + 30 \text{ dB}$ where P_{\min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.			
NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.			

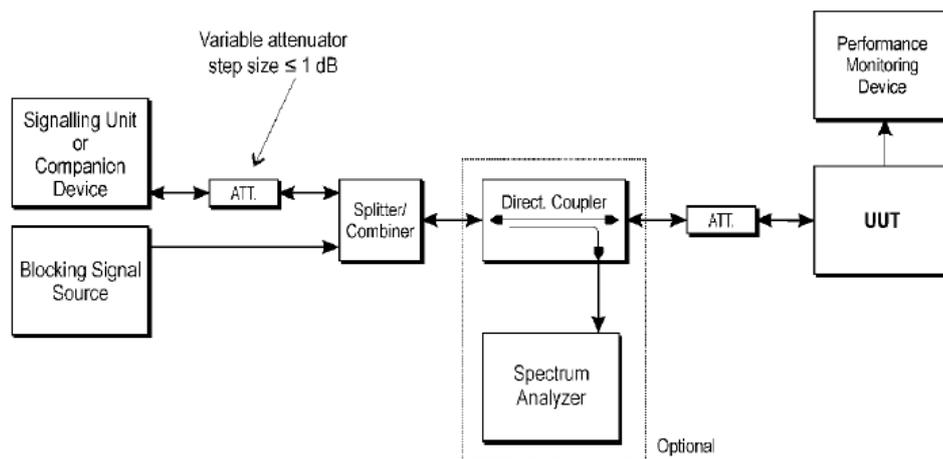Test ConfigurationTest Procedure

- For systems using multiple receive chains only one chain (antenna port) need to be tested. All other receiver inputs shall be terminated.
- For non-frequency hopping equipment, the UUT shall be set to the lowest operating channel.
- The blocking signal generator is set to the first frequency as defined in the appropriate table corresponding to the receiver category and type of equipment.
- With the blocking signal generator switched off, a communication link is established between the UUT and the associated companion device. The variable attenuator is set to a value that achieves the minimum performance criteria with a resolution of at least 1 dB. The resulting level for the wanted signal at the input of the UUT is P_{\min} . This value shall be measured and recorded in the test report.
- The signal level is increased by the value provided in the table corresponding to the receiver category and type of equipment.
- The blocking signal at the UUT is set to the level provided in the table corresponding to the receiver category and type of equipment. It shall be verified and recorded in the test report that the performance criteria is met.

7. Repeat step 6 for each remaining combination of frequency and level for the blocking signal as provided in the table corresponding to the receiver category and type of equipment.
8. For non-frequency hopping equipment, repeat step 2 to step 7 with the UUT operating at the highest operating channel.

Test result

Raw data reference to Section 6 from CTL2312127041-W_2.4G_WIFI_Appendix.

4 Test Setup Photos of the EUT



5 External and Internal Photos of the EUT

Reference to the test report No.CTL2312127041-WE

*****End of Report*****

6 ANNEX E

Information as required by EN 300 328 V2.2.2, clause 5.4.1

In accordance with EN 300 328, clause 5.4.1, the following information is provided by the supplier.

a) The type of modulation used by the equipment:

- FHSS
 Other forms of modulation

b) In case of FHSS modulation:

- In case of non-Adaptive Frequency Hopping equipment:
The number of Hopping Frequencies:
- In case of Adaptive Frequency Hopping Equipment:
The maximum number of Hopping Frequencies:
The minimum number of Hopping Frequencies:
- The (average) Dwell Time:

c) Adaptive / non-adaptive equipment:

- Non-adaptive Equipment
 Adaptive Equipment without the possibility to switch to a non-adaptive mode
 Adaptive Equipment which can also operate in a non-adaptive mode

d) In case of adaptive equipment:

The Channel Occupancy Time implemented by the equipment: 13ms

- The equipment has implemented an LBT based DAA mechanism
- In case of equipment using modulation different from FHSS:
 - The equipment is Frame Based equipment
 - The equipment is Load Based equipment
 - The equipment can switch dynamically between Frame Based and Load Based equipment
- The CCA time implemented by the equipment: 15
- The equipment has implemented an non-LBT based DAA mechanism
 The equipment can operate in more than one adaptive mode

e) In case of non-adaptive Equipment:

The maximum RF Output Power (e.i.r.p.): dBm

The maximum (corresponding) Duty Cycle: %

Equipment with dynamic behaviour, that behaviour is described here. (e.g. the different combinations of duty cycle and corresponding power levels to be declared):

f) The worst case operational mode for each of the following tests:

- RF Output Power
- 802.11b 1Mbps, 802.11g 6Mbps, 802.11(HT20) 6.5Mbps, 802.11(HT40) 13.5Mbps
- Power Spectral Density
802.11b 1Mbps, 802.11g 6Mbps, 802.11(HT20) 6.5Mbps, 802.11(HT40) 13.5Mbps
- Duty cycle, Tx-Sequence, Tx-gap
N/A
- Dwell time, Minimum Frequency Occupation & Hopping Sequence (only for FHSS equipment)
N/A
- Hopping Frequency Separation (only for FHSS equipment)
N/A
- Medium Utilisation
N/A
- Adaptivity
802.11b 1Mbps, 802.11g 6Mbps, 802.11(HT20) 6.5Mbps, 802.11(HT40) 13.5Mbps
- Occupied Channel Bandwidth

802.11b 1Mbps, 802.11g 6Mbps, 802.11(HT20) 6.5Mbps,802.11(HT40) 13.5Mbps

- Transmitter unwanted emissions in the OOB domain
802.11b 1Mbps, 802.11g 6Mbps, 802.11(HT20) 6.5Mbps,802.11(HT40) 13.5Mbps
- Transmitter unwanted emissions in the spurious domain
802.11b 1Mbps, 802.11g 6Mbps, 802.11(HT20) 6.5Mbps,802.11(HT40) 13.5Mbps
- Receiver spurious emissions
802.11b 1Mbps, 802.11g 6Mbps, 802.11(HT20) 6.5Mbps,802.11(HT40) 13.5Mbps
- Receiver Blocking
802.11b 1Mbps, 802.11g 6Mbps, 802.11(HT20) 6.5Mbps,802.11(HT40) 13.5Mbps

g) The different transmit operating modes (tick all that apply):

- Operating mode 1: Single Antenna Equipment
 - Equipment with only 1 antenna
 - Equipment with 2 diversity antennas but only 1 antenna active at any moment in time
 - Smart Antenna Systems with 2 or more antennas, but operating in a (legacy) mode where only 1 antenna is used. (e.g. IEEE 802.11™ [i.3] legacy mode in smart antenna systems)
- Operating mode 2: Smart Antenna Systems - Multiple Antennas without beam forming
 - Single spatial stream / Standard throughput / (e.g. IEEE 802.11™ [i.3] legacy mode)
 - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
 - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2
- Operating mode 3: Smart Antenna Systems - Multiple Antennas with beam forming
 - Single spatial stream / Standard throughput (e.g. IEEE 802.11™ [i.3] legacy mode)
 - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 1
 - High Throughput (> 1 spatial stream) using Occupied Channel Bandwidth 2

h) In case of Smart Antenna Systems:

- The number of Receive chains:
- The number of Transmit chains:
 - Symmetrical power distribution
 - Asymmetrical power distribution

In case of beam forming, the maximum (additional) beam forming gain:

i) Operating Frequency Range(s) of the equipment:

- Operating Frequency Range 1: 2412MHz to 2472MHz
- Operating Frequency Range 2: 2422MHz to 2462MHz

NOTE: Add more lines if more Frequency Ranges are supported.

j) Occupied Channel Bandwidth(s):

- Occupied Channel Bandwidth 1: 20 MHz
- Occupied Channel Bandwidth 2: 40 MHz

k) Type of Equipment (stand-alone, combined, plug-in radio device, etc.):

- Stand-alone
- Combined Equipment (Equipment where the radio part is fully integrated within another type of equipment)
- Plug-in radio device (Equipment intended for a variety of host systems)
- Other

l) The extreme operating conditions that apply to the equipment:

Operating temperature range: -20°C to +55°C

Operating voltage range: 207V to 253V AC DC

Details provided are for the: stand-alone equipment
 Combined (or host) equipment
 Test jig

m) The intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding e.i.r.p levels:

- Antenna Type:

PCB Antenna

Antenna Gain: 4.81dBi

If applicable, additional beamforming gain (excluding basic antenna gain): dB

Temporary RF connector provided

No temporary RF connector provided

Dedicated Antennas (equipment with antenna connector)

Single power level with corresponding antenna(s)

Multiple power settings and corresponding antenna(s)

Number of different Power Levels:

Power Level 1:		dBm
Power Level 2:		dBm
Power Level 3:		dBm

n) For each of the Power Levels, provide the intended antenna assemblies, their corresponding gains (G) and the resulting e.i.r.p. levels also taking into account the beamforming gain (Y) if applicable

Power Level 1: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

Power Level 2: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

Power Level 3: dBm

Number of antenna assemblies provided for this power level:

Assembly #	Gain (dBi)	e.i.r.p. (dBm)	Part number or model name
1			
2			
3			
4			

- o) The nominal voltages of the stand-alone radio equipment or the nominal voltages of the combined (host) equipment or test jig in case of plug-in devices:

Details provided are for the: Stand-alone equipment
 Combined (or host) equipment
 Test jig

Supply Voltage AC mains State AC voltage 220V

DC State DC voltage 10.8V

In case of DC, indicate the type of power source

Internal Power Supply

External Power Supply or AC/DC adapter

Battery

Other: DC 5V from PC

- p) Describe the test modes available which can facilitate testing:

- q) The equipment type (e.g. Bluetooth®, IEEE 802.11™ [i.3], proprietary, etc.):

- r) IEEE 802.11™ [i.3]

- s) Geo-location capability supported by the equipment:

Yes

The geographical location determined by the equipment as defined in clause 4.3.1.5.5 or clause 4.3.2.12.2 is not accessible to the user

No

- t) Describe the minimum performance criteria that apply to the equipment (see clause 4.3.1.12.3 or clause 4.3.2.11.3):

N/A