



TEST REPORT

Applicant: Shenzhen Maono Technology Co., Ltd.

Address: No. 1307, 13th Floor, Building 4, Phase II of Tianan Yungu Industrial Park, Gangtuo Community, Bantian Street, Longgang District, Shenzhen, China

Manufacturer: Shenzhen Maono Technology Co., Ltd.

Address: No. 1307, 13th Floor, Building 4, Phase II of Tianan Yungu Industrial Park, Gangtuo Community, Bantian Street, Longgang District, Shenzhen, China

EUT: AI Wireless Lavalier Microphone

Trade Mark: N/A

Model Number: WM622
WM622A, WM622 PB2, WM622 B1, WM622 PC2, WM622 C1, WM622 PBC2, WM622 TX, WM622 PA2, WM622 PA3, WM622 A, WM622 C2, Wave T1 mini

Date of Receipt: Jan. 13, 2025

Test Date: Jan. 13, 2025 - Jan. 20, 2025

Date of Report: Jan. 20, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: ETSI EN 301 489-1 V2.2.3 (2019-11)
ETSI EN 301 489-3 V2.3.2 (2023-01)
EN 55032:2015+A1:2020, EN 55035:2017+A11:2020

Test Result: Pass

Report Number: DL-250113053-2ER

Prepared by(Engineer): Ken Tan

Reviewer(Supervisor): Jack Bu

Approved(Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	3
3. GENERAL INFORMATION	4
4. TEST INSTRUMENT USED	5
5. CONDUCTED EMISSION TEST	7
6. RADIATION EMISSION TEST	9
7. HARMONIC CURRENT EMISSION TEST	15
8. VOLTAGE FLUCTUATIONS & FLICKER TEST	16
9. IMMUNITY TEST OF GENERAL THE PERFORMANCE CRITERIA	17
10. ELECTROSTATIC DISCHARGE IMMUNITY TEST	19
11. RF FIELD STRENGTH SUSCEPTIBILITY TEST	21
12. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST	23
13. SURGE TEST	24
14. INJECTED CURRENTS SUSCEPTIBILITY TEST	25
15. VOLTAGE DIPS AND INTERRUPTIONS TEST	26
16. SETUP PHOTOGRAPHS	27
17. EUT PHOTOGRAPHS	29

**1. VERSION**

Version No.	Date	Description
00	Jan. 20, 2025	Original

2. TEST SUMMARY

EMC Emission				
Standard	Test Item	Limit	Result	Remark
ETSI EN 301 489-1, EN 55032	Conducted Emission at power ports	Class B	N/A	
	Conducted Emission at LAN port	Class B	N/A	
	Radiated Emission below 1GHz	Class B	PASS	
	Radiated Emission above 1GHz	Class B	PASS	
EN IEC 61000-3-2	Harmonic Current Emission	Class A or D	N/A ^{NOTE (2)}	
EN 61000-3-3	Voltage Fluctuations & Flicker	-----	N/A	
EMC Immunity				
Section ETSI EN 301 489-3, EN 55035	Test Item	Performance Criteria	Result	Remark
EN 61000-4-2	Electrostatic Discharge	B	PASS	
EN IEC 61000-4-3	RF electromagnetic field	A	PASS	
EN 61000-4-4	Fast transients	B	N/A	
EN 61000-4-5	Surges	B	N/A	
EN IEC 61000-4-6	Injected Current	A	N/A	
EN IEC 61000-4-11	Volt. Interruptions Volt. Dips	B	N/A	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) The power consumption of EUT is less than 75W and no Limits apply.

(3) Test Facility: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China



3. GENERAL INFORMATION

3.1 Description of Device (EUT)

EUT:	AI Wireless Lavalier Microphone
Trade Mark:	N/A
Model Number:	WM622 WM622A, WM622 PB2, WM622 B1, WM622 PC2, WM622 C1, WM622 PBC2, WM622 TX, WM622 PA2, WM622 PA3, WM622 A, WM622 C2, Wave T1 mini
Test Model:	WM622
Model difference:	All models are same as the samples except model name and appearance color, they have the same structure and circuit.
Power Supply:	DC 3.7V from battery DC 5V from charger
Work Frequency:	Above 108MHz
Note1:	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
Note2:	The EUT's all information provided by client.

3.2 Tested System Details

None.

3.3 Block Diagram of Test Set-up



3.4 Test Mode Description

Mode1.: On Mode

3.5 Test Auxiliary Equipment

None.

3.6 Test Uncertainty

Conducted Emission Uncertainty : $\pm 2.56\text{dB}$

Radiated Emission Uncertainty : $\pm 3.24\text{dB}$

**4. TEST INSTRUMENT USED****For Conducted Emission Test (843 Shielded Room)**

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
843 Shielded Room	ChengYu	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
Clamp	COM-POWER	CLA-050	431071	Nov. 02, 2024	Nov. 01, 2025
3-Loop Antenna	DAZE	ZN30401	13021	Nov. 02, 2024	Nov. 01, 2025
ISN T8	Schwarzbeck	NTFM 8158	101135	Nov. 01, 2024	Oct. 31, 2025
ISN T5	Schwarzbeck	NTFM 8158	101136	Nov. 01, 2024	Oct. 31, 2025
843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025
843 Cable 1#	ChengYu	CE Cable	002	Nov. 01, 2024	Oct. 31, 2025

For Radiated Emission Test (966 chamber)

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
966 Chamber	ChengYu	966 Room	966	Nov. 06, 2023	Nov. 05, 2026
Spectrum Analyzer	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
EMI Receiver	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
Amplifier	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
Amplifier	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
Broadband Trilog Antenna	Schwarzbeck	VULB9162	00306	Nov. 02, 2024	Nov. 01, 2025
Horn Antenna	Schwarzbeck	BBHA9120D	02139	Nov. 02, 2024	Nov. 01, 2025
966 Cable 1#	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
966 Cable 2#	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025

For Harmonic & Flicker Test (EMS --- site)

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
Harmonics, Flicker & power Analyser	LAPLACE INSTRUMENTS	AC2000A	311370	Nov. 01, 2024	Oct. 31, 2025
AC Power Supply	MToni	HPF5010	633659	Nov. 01, 2024	Oct. 31, 2025

For Electrostatic Discharge Immunity Test (EMS --- site)

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
ESD Tester	SCHLODER	SESD 230	17352	Nov. 02, 2024	Nov. 01, 2025

**For RF Field Strength Susceptibility Test (Keyway --- site)**

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
Signal Generator	HP	8648A	3625U00573	Apr. 12, 2024	Apr. 11, 2025
Amplifier	A&R	500A100	17034	Apr. 12, 2024	Apr. 11, 2025
Amplifier	A&R	100W/1000M1	17028	Apr. 12, 2024	Apr. 11, 2025
Audio Analyzer (20Hz~1GHz)	Panasonic	2023B	202301/428	Apr. 12, 2024	Apr. 11, 2025
Isotropic Field Probe	A&R	FP2000	16755	Apr. 12, 2024	Apr. 11, 2025
Antenna	EMCO	3108	9507-2534	Apr. 12, 2024	Apr. 11, 2025
Log-periodic Antenna	A&R	AT1080	16812	Apr. 12, 2024	Apr. 11, 2025

For EFT /B, Surge, Voltage Dips Interruptions Test (EMS --- site)

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
Transient Comprehensive Immunity Test System	Graphtec	HVIP16T+HCO MPACT 5	192501+192202	Nov. 01, 2024	Oct. 31, 2025
Coupling Clamp	HTEC	001	0001	Nov. 01, 2024	Oct. 31, 2025

For Injected Currents Susceptibility Test (EMS --- site)

Equipment	Manufacturer	Model	Serial	Last Cal.	Next Cal.
C/S Test System	LIONCEL	RIS-6091-85	0191101	Nov. 01, 2024	Oct. 31, 2025
CDN	LIONCEL	CDN-M2-16	0191001	Nov. 01, 2024	Oct. 31, 2025
CDN	LIONCEL	CDN-M3-16	0191002	Nov. 01, 2024	Oct. 31, 2025
Injection Clamp	Frankonia	EMCL-20	18101728-0108	Nov. 01, 2024	Oct. 31, 2025


Other

Name	Manufacturer	Model	Software version
EMC Conduction Test System	FALA	EZ_EMG	EMC-CON 3A1.1
EMC radiation test system	FALA	EZ_EMG	FA-03A2
Harmonic test system	LAPLACE INSTRUMENTS	Harmonic	1.0.0.0
RF Immunity test system	LIONCEL	C/S	1.1.0.0

5. CONDUCTED EMISSION TEST

5.1 Block Diagram of Test Setup


For Mains Terminals Test

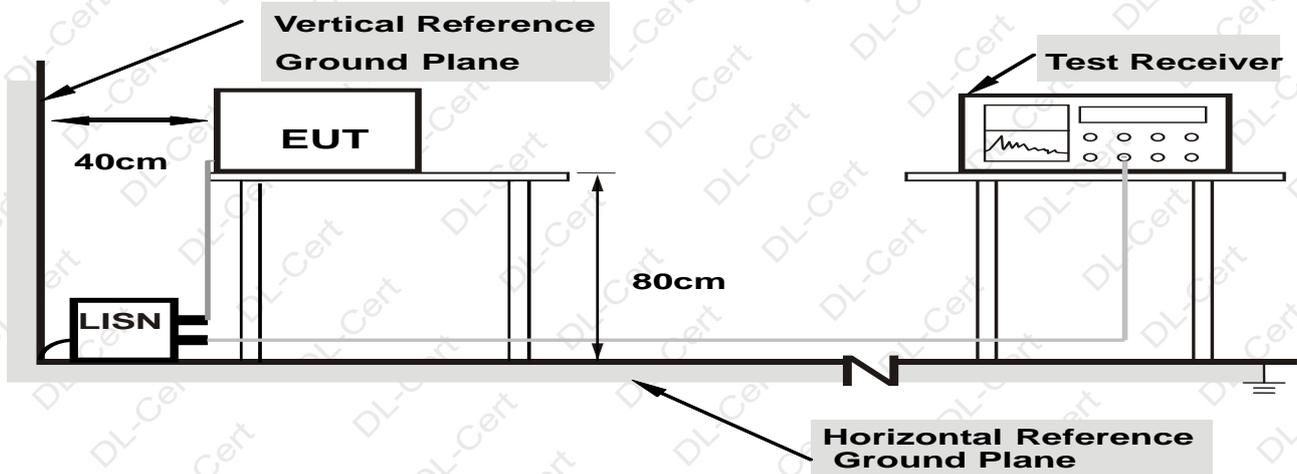

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For Telecom Port Test

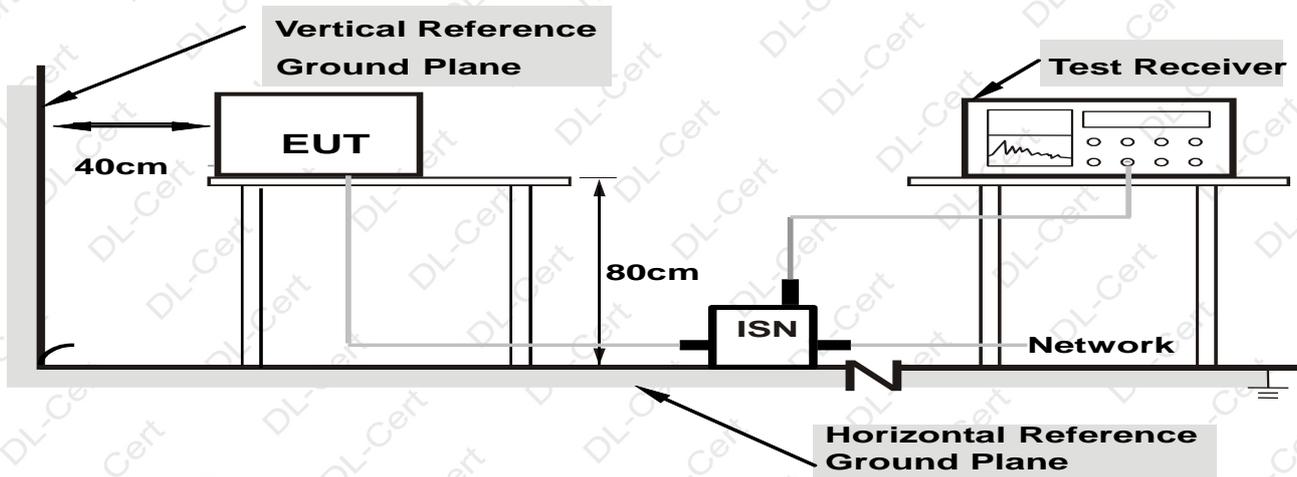

Note: 1. Support units were connected to second LISN.

2. Both of ISNs are 80 cm from EUT and at least 80 cm from other units and other metal planes

5.2 Test Standard and Limit

EN 55032



For Mains Terminals Test			For Telecom Port Test		
Frequency MHz	Limits dB(μV)		Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level		Quasi-peak Level	Average Level
0.15~0.50	66 ~ 56*	55 ~ 46*	0.15~0.50	84 ~ 74*	74 ~ 64*
0.50~5.00	56	46	0.50~30.00	74	64
5.00~30.00	60	50	/	/	/

Notes: 1. *Decreasing linearly with logarithm of frequency.
 2. The lower limit shall apply at the transition frequencies.

5.3 EUT Configuration on Test

The following equipment's are installed on conducted emission test to meet EN 55032 requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

5.4 Operating Condition of EUT

- 5.4.1 Setup the EUT and simulators as shown in Section 5.1.
- 5.4.2 Turn on the power of all equipment's.
- 5.4.3 Let the EUT work in test modes and test it.

5.5 Test Procedure

The EUT is put on the table and connected to the AC mains through a Artificial Mains Network (AMN) or ISN. This provided a 50ohm coupling impedance for the tested equipment. Both sides of AC line are checked to find out the maximum conducted emission levels according to the EN 55032 regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESR) is set at 10KHz.

The frequency ranges from 150 KHz to 30 MHz is investigated.


5.6 Test Result

The EUT is powered by DC, no requirements for this item.


6. RADIATION EMISSION TEST

6.1 Block Diagram of Test Setup

Below 1GHz

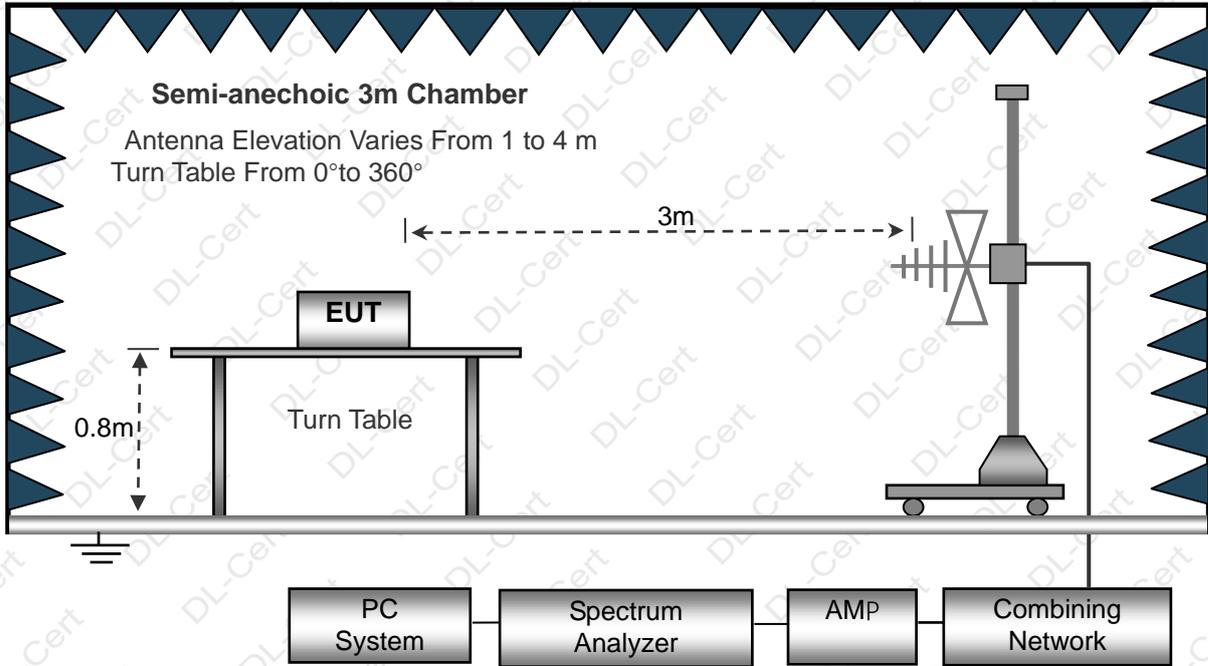

Above 1GHz

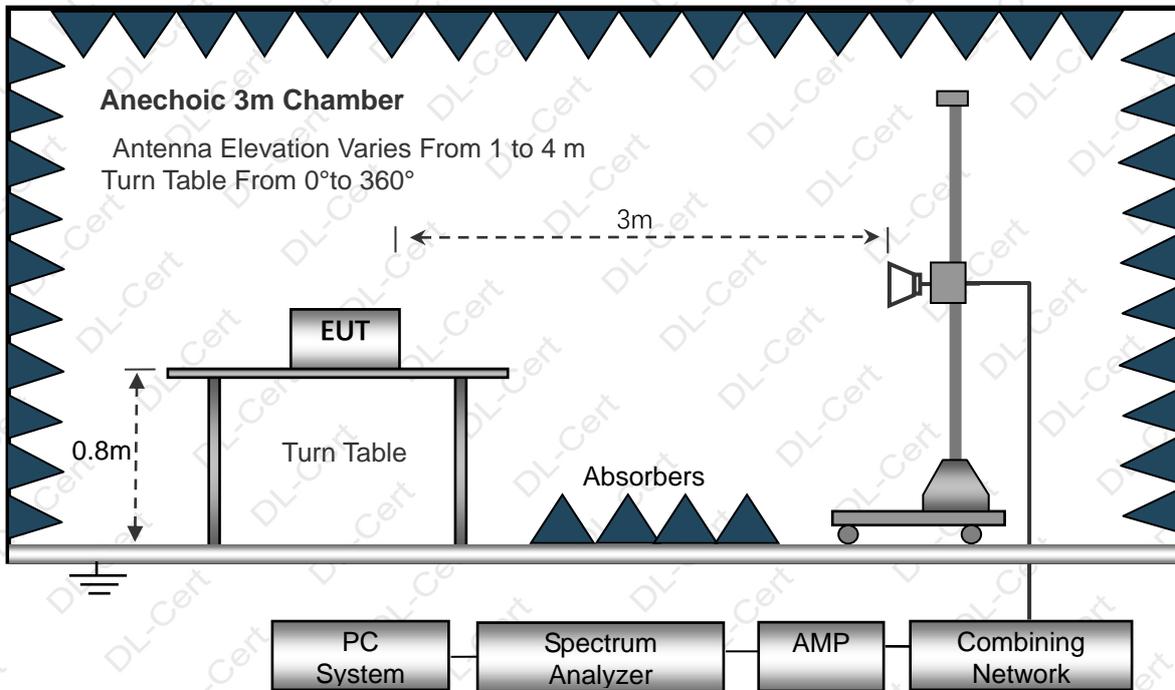

6.2 Test Standard and Limit

EN 55032



Below 1GHz

Equipment type	Distance (Meters)	Frequency MHz	Limit values dB(μV/m) Quasi-peak
FM receivers	3	≤1 000	Fundamental 60
		30 to 230	Harmonics 52
		230 to 300	Harmonics 52
		300 to 1 000	Harmonics 56
Other	3	30 to 230	40
		230 to 1 000	47

Above 1GHz

Frequency MHz	Distance (Meters)	Field Strengths Limits dB(μV/m)	Detector
1000~3000	3	74.0	PEAK
1000~3000	3	54.0	AVERAGE
3000~6000	3	74.0	PEAK
3000~6000	3	54.0	AVERAGE

Remark:

(1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

6.3 EUT Configuration on Test

The EN 55032 regulations test method must be used to find the maximum emission during radiated emission test.

The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 5.3.

6.4 Operating Condition of EUT

Same as conducted emission test, which is listed in Section 5.4 except the test set up replaced as Section 6.2.

6.5 Test Procedure

- 1) The radiated emissions test was conducted in a semi-anechoic chamber.
- 2) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
- 3) Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.
- 4) The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.
- 5) The bandwidth setting on the field strength meter (R&S Test Receiver ESCI) is set at 120KHz.
- 6) The frequency range from 30MHz to 1000MHz is checked.
- 7) For above 1GHz, the peak emission below the average's limit, so the average's result no recording.
- 8) we pretest all mode, the data only show the worst mode's data.


6.6 Test Result

PASS

Please refer to the following page.



Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Test Mode:	Mode 1

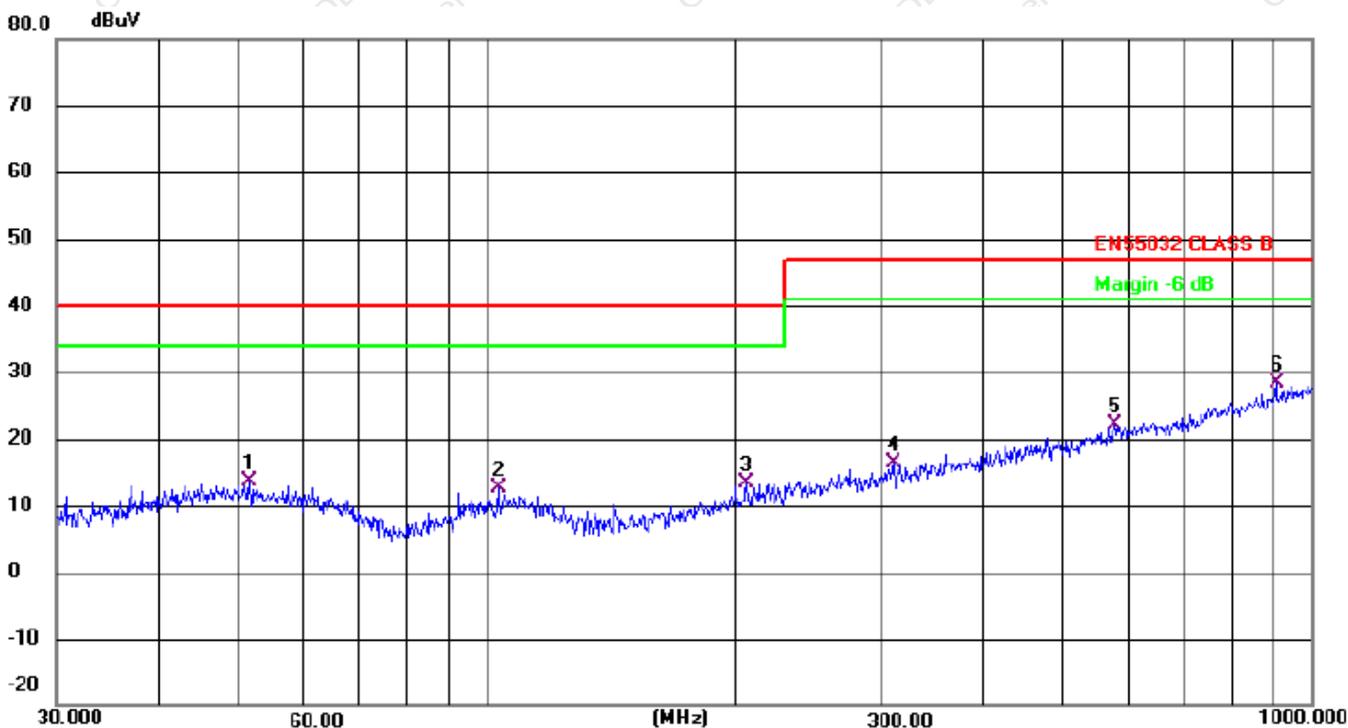

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Margin dB	Detector
1		51.4807	26.62	-13.07	13.55	40.00	-26.45	QP
2		103.0800	27.45	-14.78	12.67	40.00	-27.33	QP
3		206.3976	28.00	-14.73	13.27	40.00	-26.73	QP
4		311.0867	28.19	-11.78	16.41	47.00	-30.59	QP
5		576.6443	27.84	-5.79	22.05	47.00	-24.95	QP
6	*	906.4824	28.96	-0.63	28.33	47.00	-18.67	QP


Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;



Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Test Mode:	Mode 1

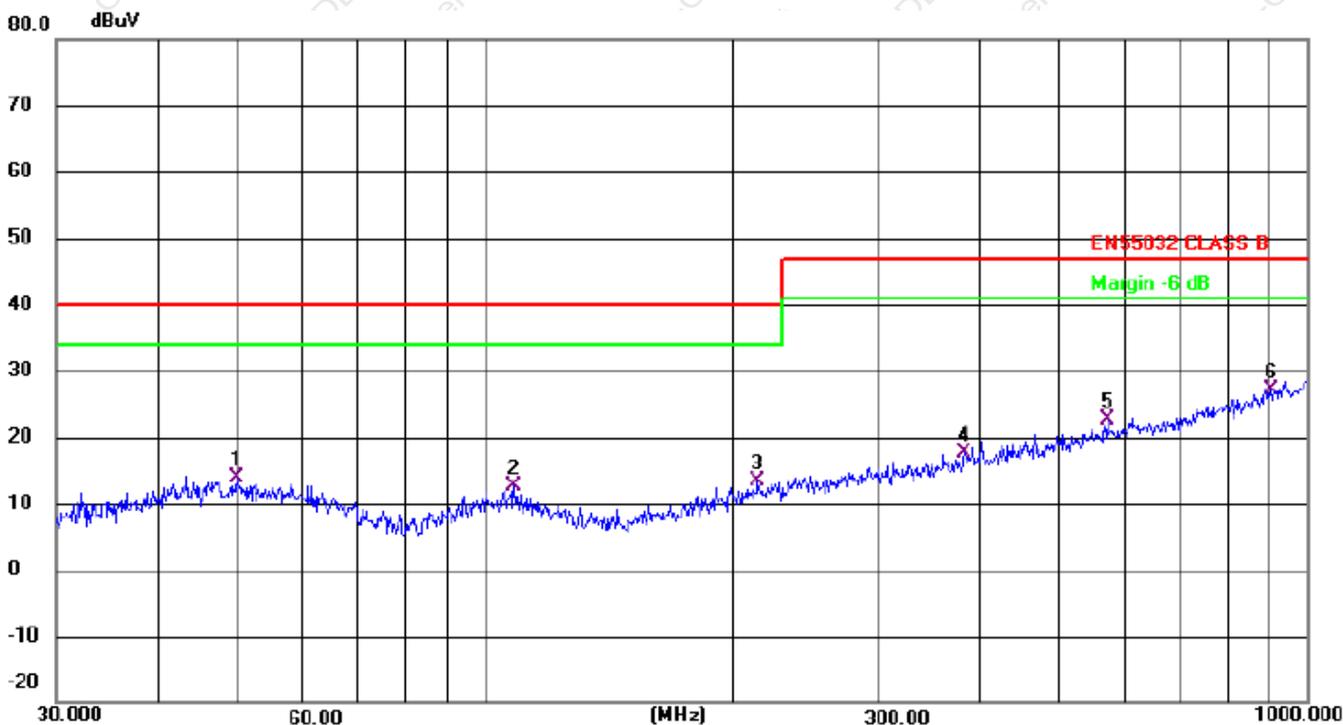

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Margin dB	Detector
1		49.7068	26.67	-12.87	13.80	40.00	-26.20	QP
2		108.2667	27.39	-14.85	12.54	40.00	-27.46	QP
3		214.5143	27.59	-14.31	13.28	40.00	-26.72	QP
4		382.5879	27.26	-9.71	17.55	47.00	-29.45	QP
5		570.6100	28.63	-5.94	22.69	47.00	-24.31	QP
6	*	903.3094	27.88	-0.65	27.23	47.00	-19.77	QP


Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;



Radiation Emission Test Data Above 1GHz			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Horizontal
Test Voltage:	DC 3.7V	Test Mode:	Mode 1

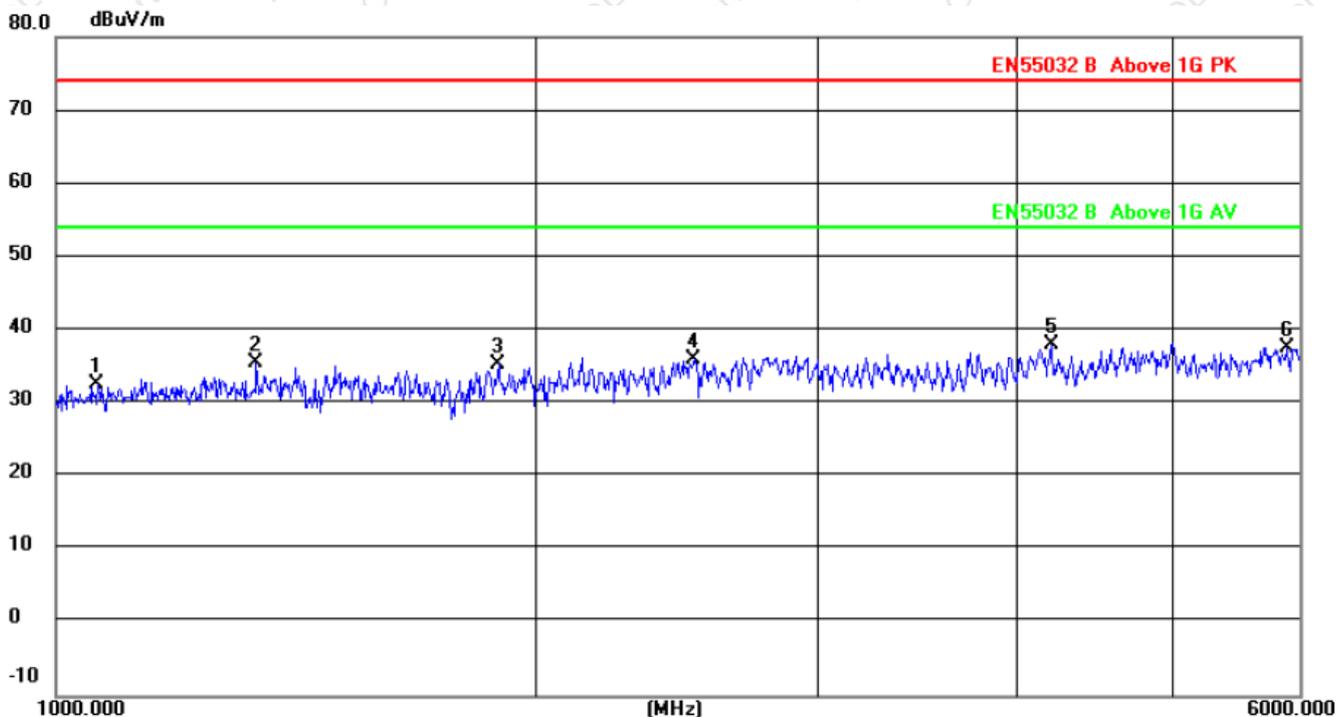

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Margin dB	Detector
1		1062.813	53.35	-20.79	32.56	74.00	-41.44	peak
2		1334.389	55.14	-19.64	35.50	74.00	-38.50	peak
3		1892.438	51.85	-16.41	35.44	74.00	-38.56	peak
4		2511.711	51.51	-15.46	36.05	74.00	-37.95	peak
5	*	4192.963	46.30	-8.32	37.98	74.00	-36.02	peak
6		5893.452	39.51	-1.89	37.62	74.00	-36.38	peak


Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;



Radiation Emission Test Data Above 1GHz			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Polarization:	Vertical
Test Voltage:	DC 3.7V	Test Mode:	Mode 1

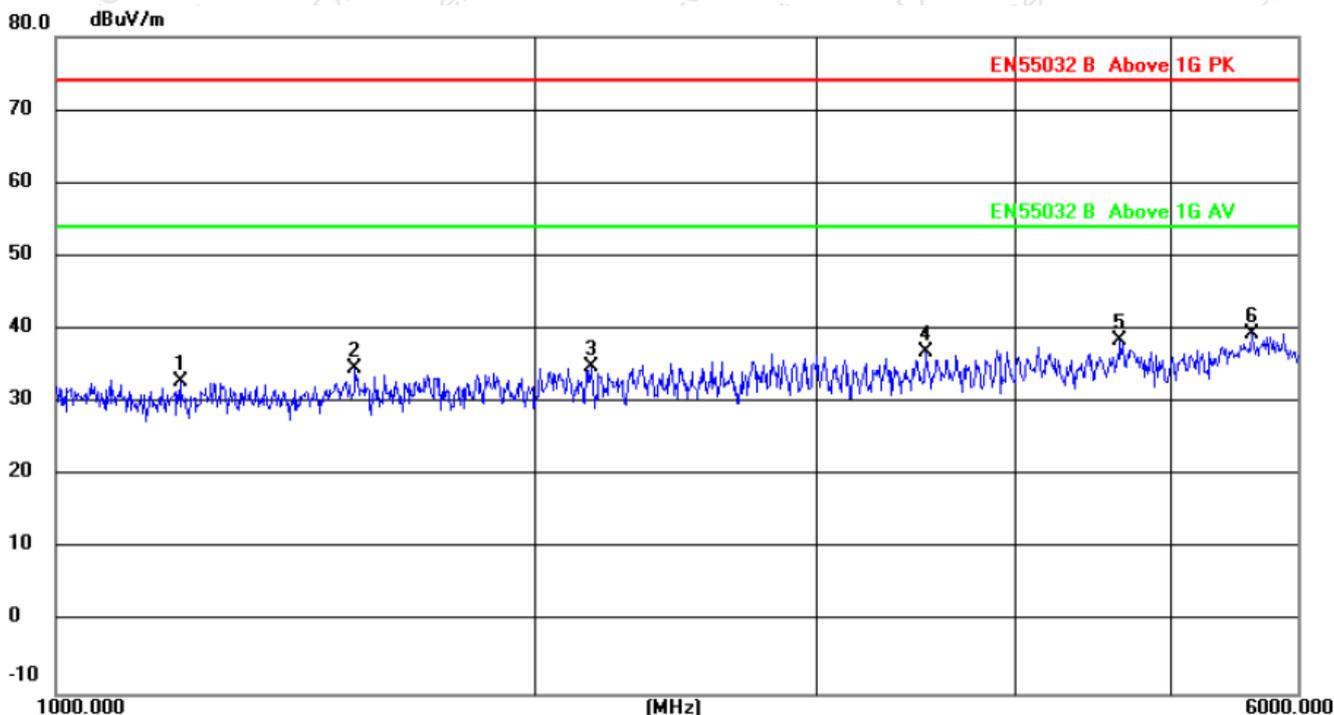

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		1196.231	52.71	-19.92	32.79	74.00	-41.21	peak
2		1540.049	53.37	-18.81	34.56	74.00	-39.44	peak
3		2164.628	49.68	-14.78	34.90	74.00	-39.10	peak
4		3511.430	47.60	-10.79	36.81	74.00	-37.19	peak
5		4643.823	44.27	-5.86	38.41	74.00	-35.59	peak
6	*	5615.128	42.43	-3.07	39.36	74.00	-34.64	peak


Remark:

Correct Factor=Cable loss+Antenna factor-Preamplifier

Measurement Level = Reading Level + Correct Factor; Margin = Measurement Level- Limit;

7. HARMONIC CURRENT EMISSION TEST

7.1 Block Diagram of Test Setup

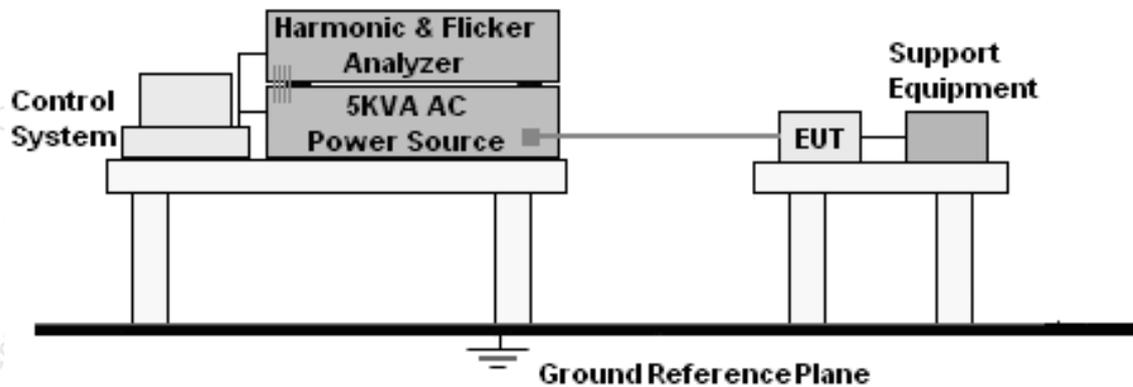

7.2 Test Standard

EN IEC 61000-3-2

7.3 Operating Condition of EUT

Setup the EUT as shown in Section 5.1.

Turn on the power of all equipment.

Let the EUT work in test mode and test it.

7.4 Test Procedure

The power cord of the EUT is connected to the output of the test system. Turn on the power of the EUT and use the test system to test the harmonic current level.

7.5 Test Results

The EUT is powered by DC, no requirements for this item.



8. VOLTAGE FLUCTUATIONS & FLICKER TEST

8.1 Block Diagram of Test Setup

Same as Section 7.1.

8.2 Test Standard

EN 61000-3-3

8.3 Operating Condition of EUT

Same as Section 7.3. The power cord of the EUT is connected to the output of the test system. Turn on the power of the EUT and use the test system to test the harmonic current level.

Flicker Test Limit

Test items	Limits
Pst	1.0
dc	3.3%
Tmax	4.0%
dt	Not exceed 3.3% for 500ms

8.4 Test Procedure

The power cord of the EUT is connected to the output of the test system. Turn on the power of the EUT and use the test system to test the harmonic current level.

8.5 Test Results

The EUT is powered by DC, no requirements for this item.

**9. IMMUNITY TEST OF GENERAL THE PERFORMANCE CRITERIA**

Product Standard	EN 55035, ETSI EN 301 489-3	
Criteria	During the test	After the test
A	Operate as intended No loss of function No unintentional responses	Operate as intended No loss of function No degradation of performance No loss of stored data or user programmable functions
B	May show loss of function No unintentional responses	Operate as intended Lost function(s) shall be self-recoverable No degradation of performance No loss of stored data or user programmable functions

**PERFORMANCE FOR TT**

The performance criteria B shall apply, except for voltage dips of 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply.

Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an acknowledgement (ACK) or not-acknowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

PERFORMANCE FOR TR

The performance criteria B shall apply, except for voltage dips of 100ms and voltage interruptions of 5 000ms duration for which performance criteria C shall apply.

Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

PERFORMANCE FOR CT

The performance criteria A shall apply.

Tests shall be repeated with the EUT in standby mode (if applicable) to ensure that unintentional transmission does not occur. In systems using acknowledgement signals, it is recognized that an ACKnowledgement (ACK) or Not ACKnowledgement (NACK) transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.


PERFORMANCE FOR CR

The performance criteria A shall apply.

Where the EUT is a transceiver, under no circumstances, shall the transmitter operate unintentionally during the test. In systems using acknowledgement signals, it is recognized that an ACK or NACK transmission may occur, and steps should be taken to ensure that any transmission resulting from the application of the test is correctly interpreted.

10. ELECTROSTATIC DISCHARGE IMMUNITY TEST

10.1 Block Diagram of Test Setup

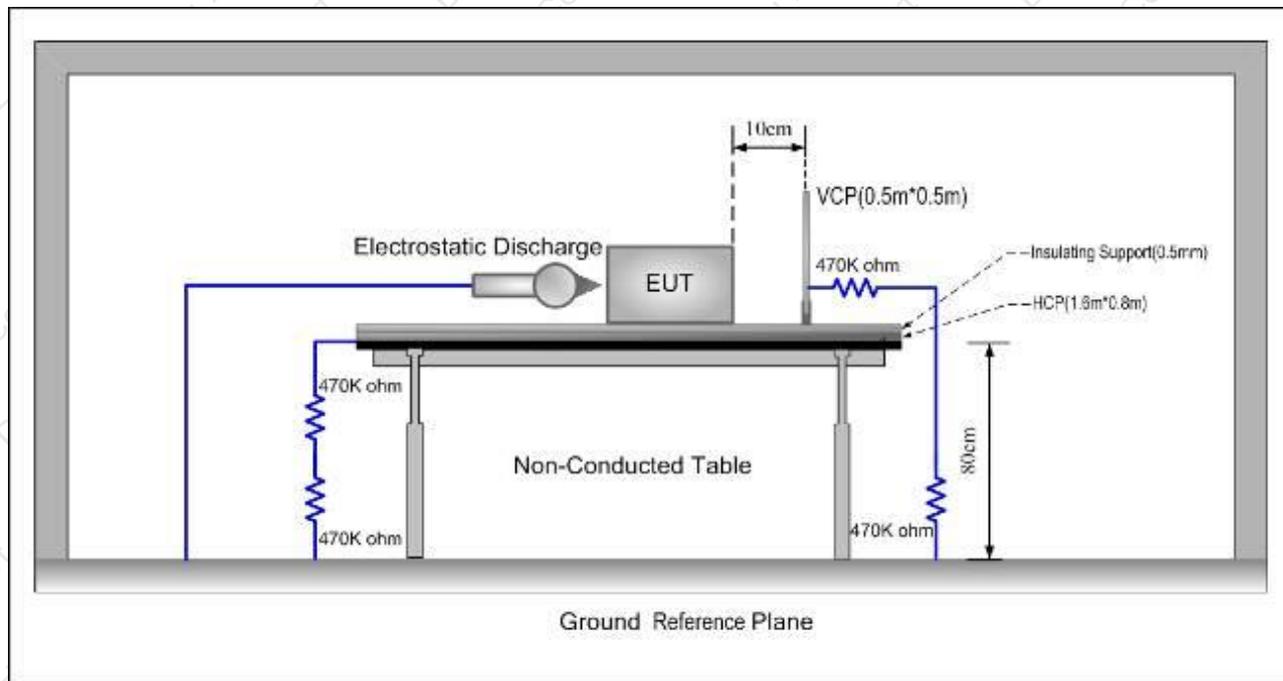

10.2 Test Standard

ETSI EN 301 489-3, EN 55035, EN 61000-4-2

10.3 Severity Levels and Performance Criterion

Severity Level: 3 / Air Discharge: $\pm 8\text{KV}$

Level: 2 / Contact Discharge: $\pm 4\text{KV}$

Performance criterion: B

10.4 Test Procedure

- Electrostatic discharges were applied only to those points and surfaces of the Product that are accessible to users during normal operation.
- The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- The time interval between two successive single discharges was at least 1 second.
- The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the Product.
- Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- Air discharges were applied with the round discharge tip of the discharge electrode approaching the Product as fast as possible (without causing mechanical damage) to touch the Product. After each discharge, the ESD generator was removed from the Product and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- At least ten single discharges (in the most sensitive polarity) were applied to the Horizontal Coupling Plane at points on each side of the Product. The ESD generator was positioned vertically at a distance of 0.1 meters from the Product with the discharge electrode touching the HCP.
- At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical



edge of the Vertical Coupling Plane in sufficiently different positions that the four faces of the Product were completely illuminated. The VCP (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the Product.

10.5 Test Results


PASS

Please refer to the following page.

Electrostatic Discharge Test Data					
Temperature:	25.1°C		Humidity:	55%	
Power Supply:	DC 3.7V		Test Mode:	Mode 1	
Discharge Method	Discharge Position	Voltage (±kV)	Min. No. of Discharge per polarity (Each Point)	Required Level	Result
Contact Discharge	Conductive Surfaces	4	10	B	Pass
	Indirect Discharge HCP	4	10	B	Pass
	Indirect Discharge VCP	4	10	B	Pass
Air Discharge	Slots, Apertures, and Insulating Surfaces	8	10	B	Pass
Note: N/A					

11. RF FIELD STRENGTH SUSCEPTIBILITY TEST

11.1 Block Diagram of Test Setup

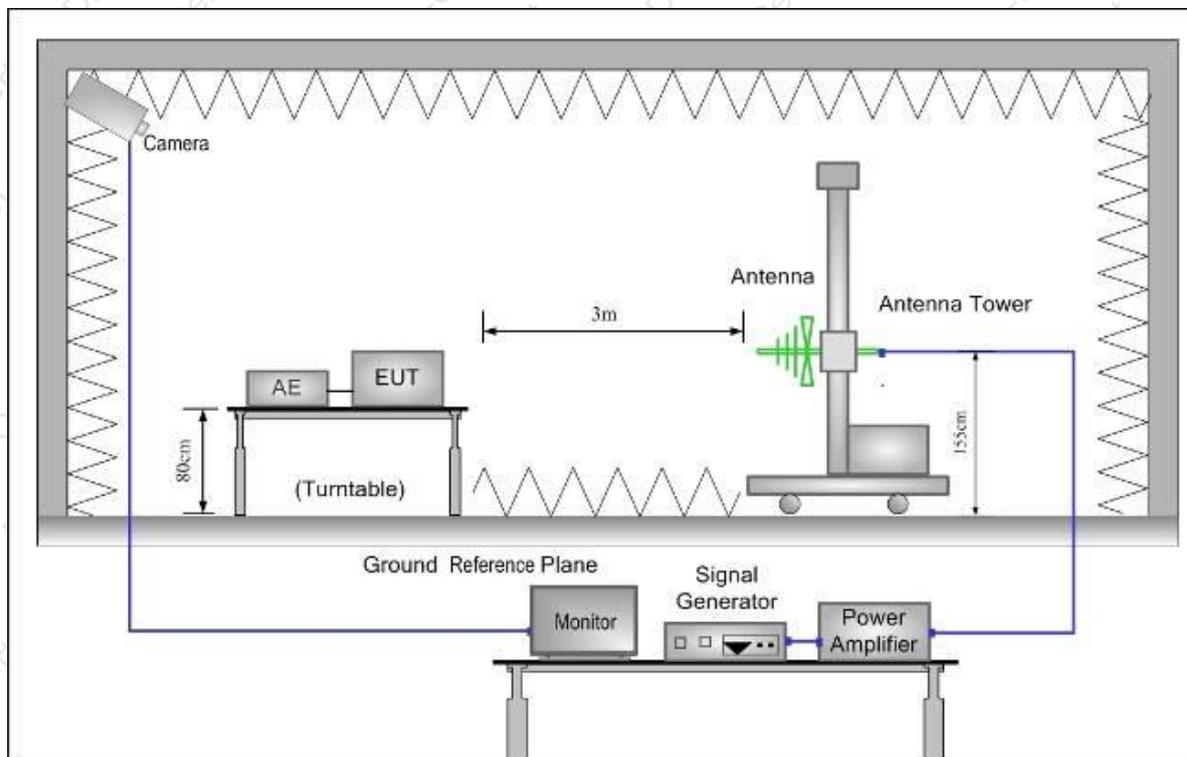

11.2 Test Standard

ETSI EN 301 489-3, EN 55035, EN IEC 61000-4-3

11.3 Severity Levels and Performance Criterion

Severity Level 2, 3V / m

Performance criterion: A

11.4 Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually.

All the scanning conditions are as follows:

Condition of Test	Remarks
Fielded Strength	3 V/m (Severity Level 2)
Radiated Signal	Modulated
Scanning Frequency	80 – 6000 MHz
Dwell time of radiated	0.0015 decade/s
Waiting Time	1 Sec.



11.5 Test Results

PASS


Please refer to the following page.

R/S Test Data				
Temperature:	25.1°C	Humidity:	55%	
Power Supply:	DC 3.7V	Test Mode:	Mode 1	
Criterion:	A	Steps	1 %	
Frequency (MHz)	Position	Field Strength (V/m)	Required Level	Result
80 – 6000	Front, Right, Back, Left	3	A	Pass
Note: N/A				


12. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

12.1 Block Diagram of EUT Test Setup

For input a.c. / d.c. power port:

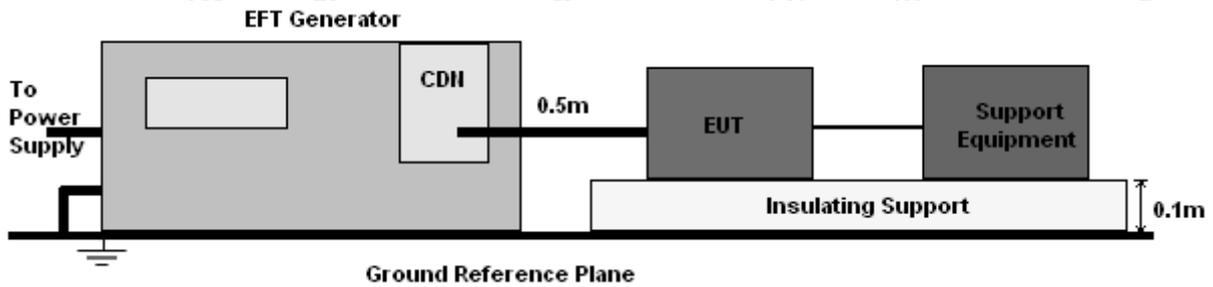

For signal lines and control lines:

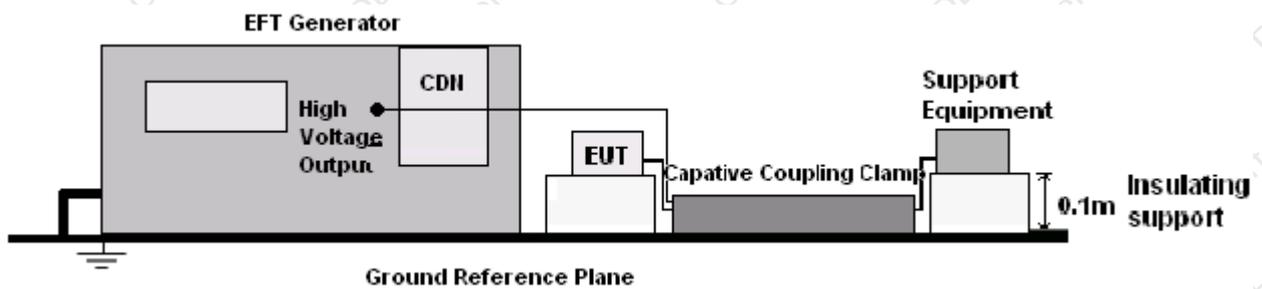

12.2 Test Standard

ETSI EN 301 489-3, EN 55035, EN 61000-4-4

12.3 Severity Levels and Performance Criterion

Severity Level 2 at 1KV, Pulse Rise time & Duration: 5 nS / 50 nS

Performance criterion: B

12.4 Test Procedure

EUT shall be placed 0.8m high above the ground reference plane which is a min.1m*1m metallic sheet with 0.65mm minimum thickness. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m

For input and output AC power ports:


The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 minutes.

12.5 Test Results

The EUT is powered by DC, no requirements for this item.

13. SURGE TEST

13.1 Block Diagram of EUT Test Setup

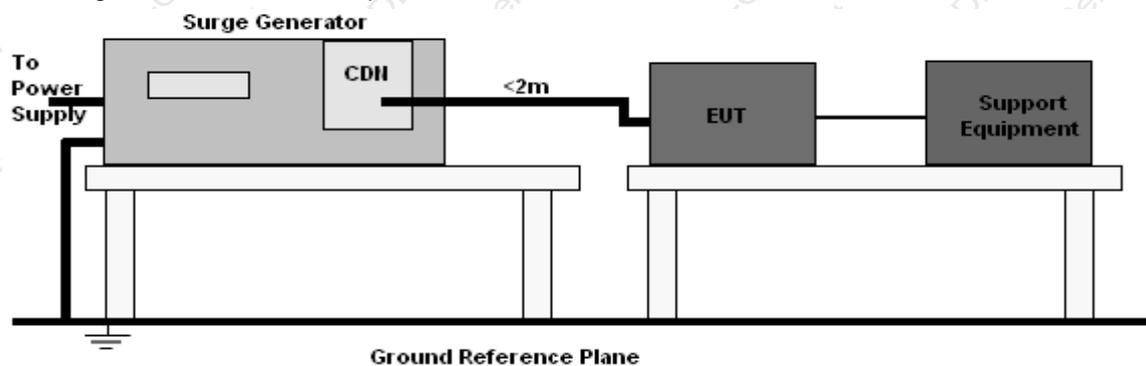

13.2 Test Standard

ETSI EN 301 489-3, EN 55035, EN 61000-4-5

13.3 Severity Levels and Performance Criterion

Severity Level: Line to Line, Level 2 at 1KV;

Severity Level: Line to Earth, Level 3 at 2KV.

Performance criterion: B

13.4 Test Procedure

- 1) Set up the EUT and test generator as shown on section 11.1
- 2) For line to line coupling mode, provide a 1KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 4) Different phase angles are done individually.
- 5) Repeat procedure 2) to 4) except the open-circuit test voltage change from 1KV to 2KV for line to earth coupling mode test.
- 6) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.


13.5 Test Result

The EUT is powered by DC, no requirements for this item.


14. INJECTED CURRENTS SUSCEPTIBILITY TEST

14.1 Block Diagram of EUT Test Setup

For input a.c. / d.c. power port:

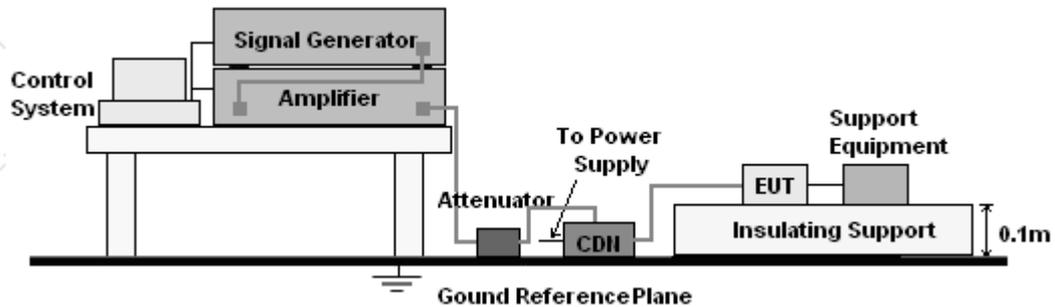

For signal lines and control lines:

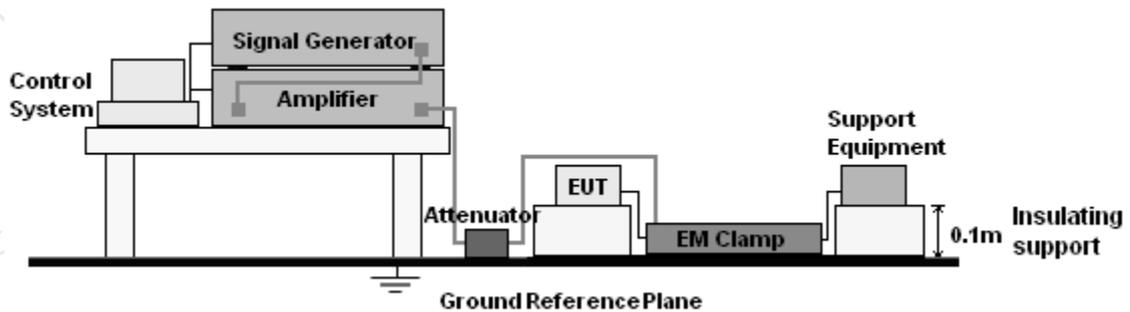

14.2 Test Standard

ETSI EN 301 489-3, EN 55035, EN IEC 61000-4-6

14.3 Severity Levels and Performance Criterion

Severity Level 2: 3V(rms), 150KHz ~ 80MHz

Performance criterion: A

14.4 Test Procedure

- 1) Set up the EUT, CDN and test generator as shown on section 12.1
- 2) Let EUT work in test mode and measure.
- 3) The EUT and supporting equipments are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane at above 0.1-0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 150KHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave
- 7) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.


14.5 Test Result

The EUT is powered by DC, no requirements for this item.



15. VOLTAGE DIPS AND INTERRUPTIONS TEST

15.1 Block Diagram of EUT Test Setup

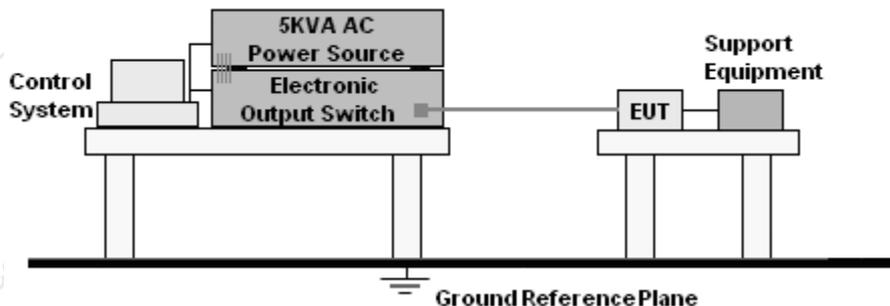

15.2 Test Standard

ETSI EN 301 489-3, EN 55035, EN IEC 61000-4-11

15.3 Severity Levels and Performance Criterion

Input and Output AC Power Ports.

- Voltage Dips.
- Voltage Interruptions.

Environmental Phenomena	Test Specification	Units	Performance Criterion
Voltage Dips	100 0.5	% Reduction period	B
	100 1	% Reduction period	B
	30 25	% Reduction period	B
Voltage Interruptions	100 250	% Reduction period	B

15.4 Test Procedure


- 1) Set up the EUT and test generator as shown on section 14.1
- 2) The interruption is introduced at selected phase angles with specified duration. There is a 3mins minimum interval between each test event.
- 3) After each test a full functional check is performed before the next test.
- 4) Repeat procedures 2 & 3 for voltage dips, only the level and duration is changed.
- 5) Record any degradation of performance.

15.5 Test Result

The EUT is powered by DC, no requirements for this item.




16. SETUP PHOTOGRAPHS

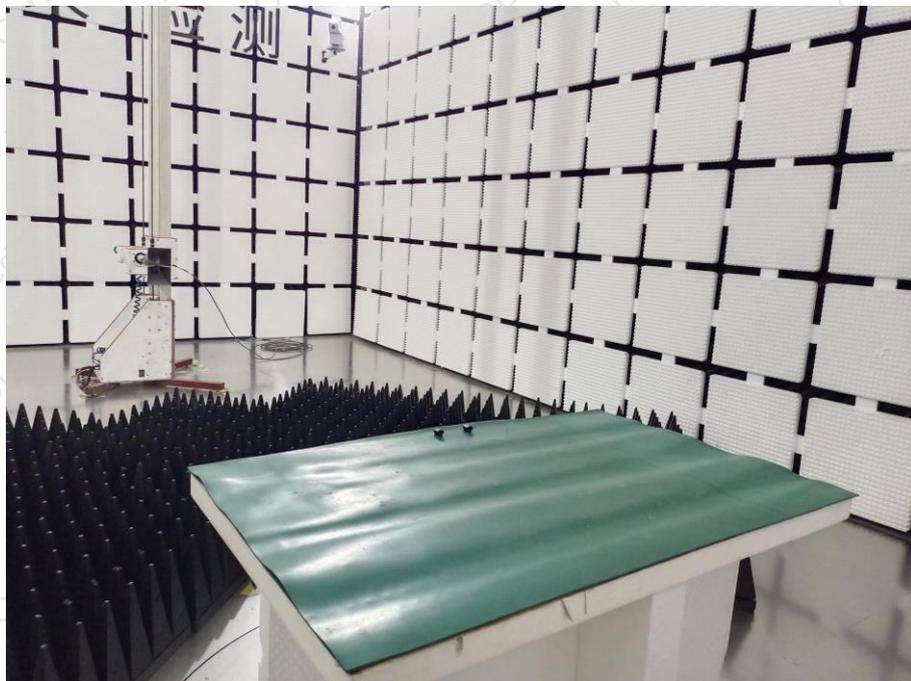












17. EUT PHOTOGRAPHS


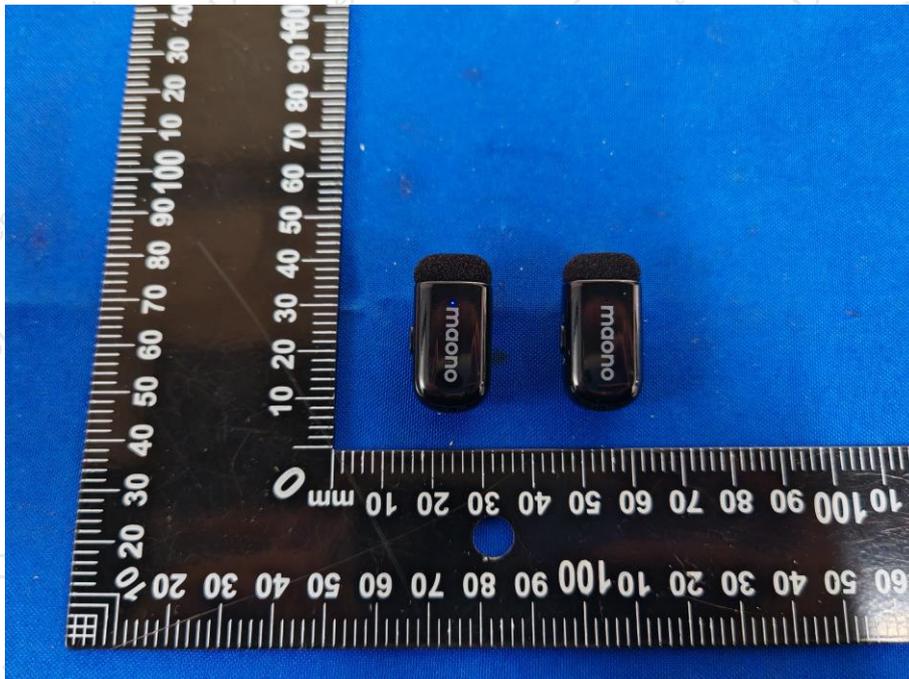



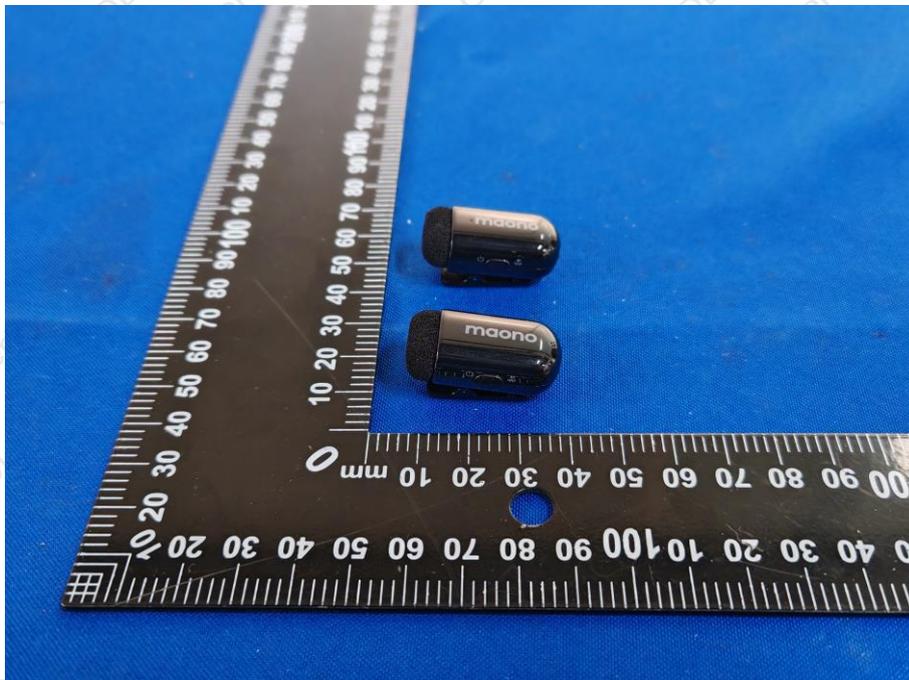


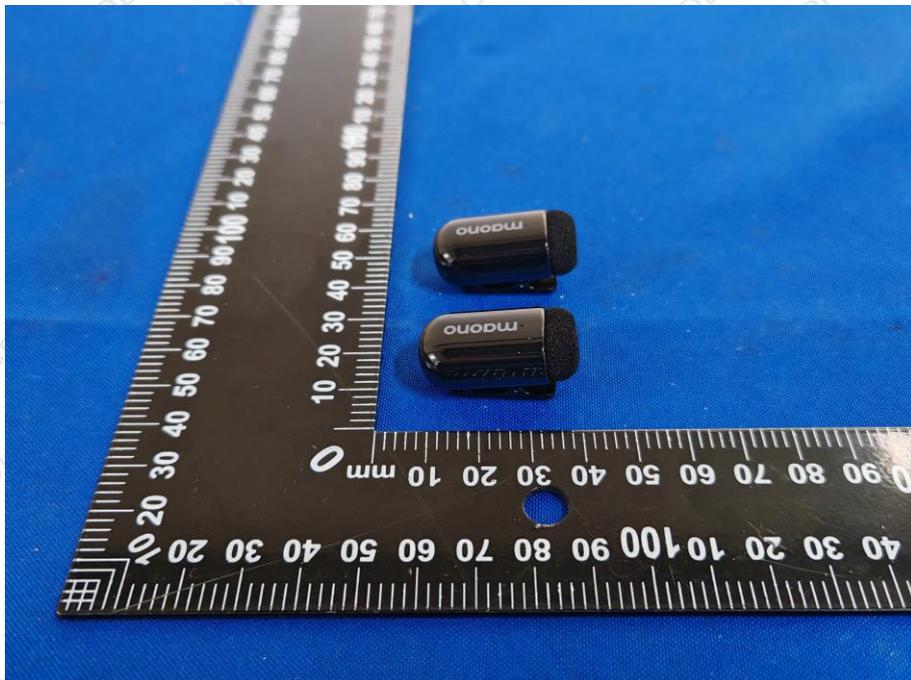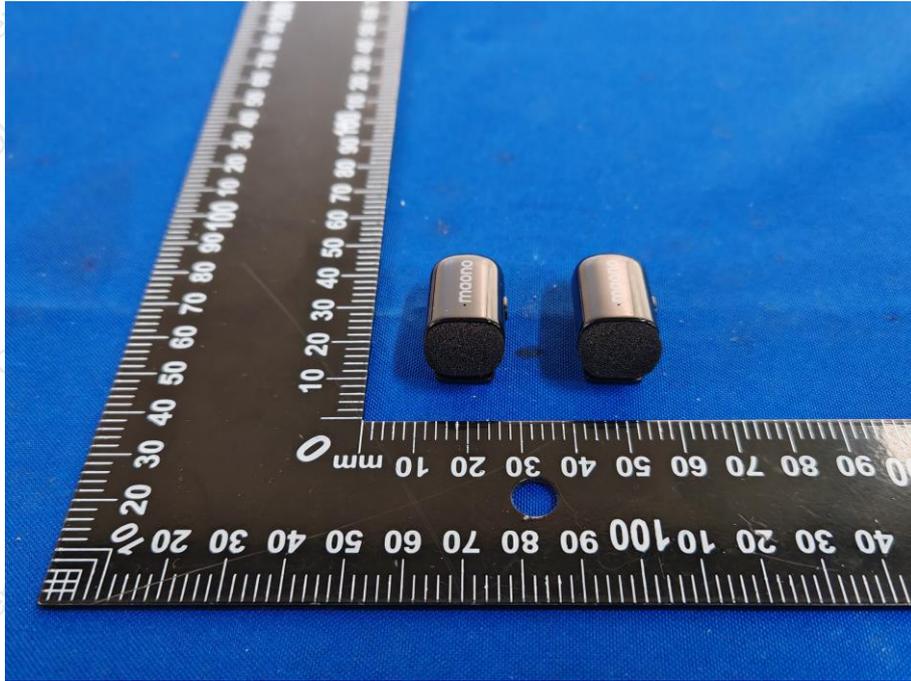

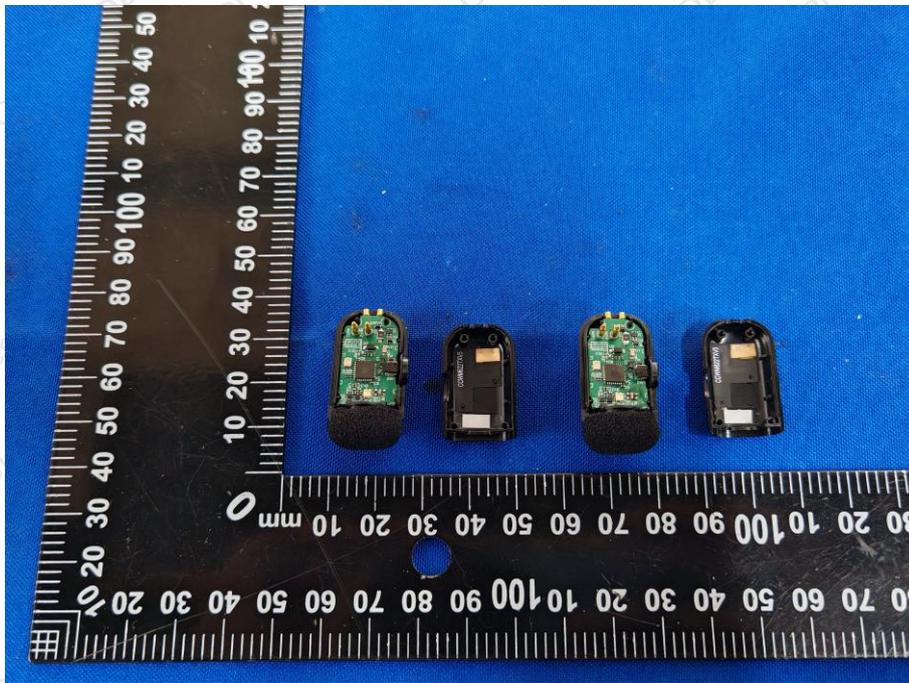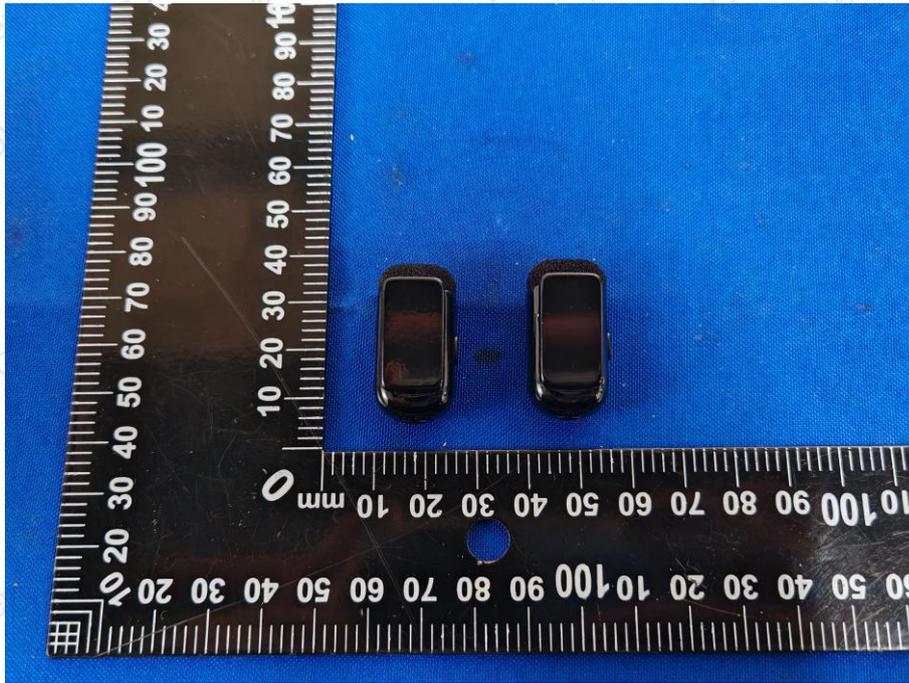

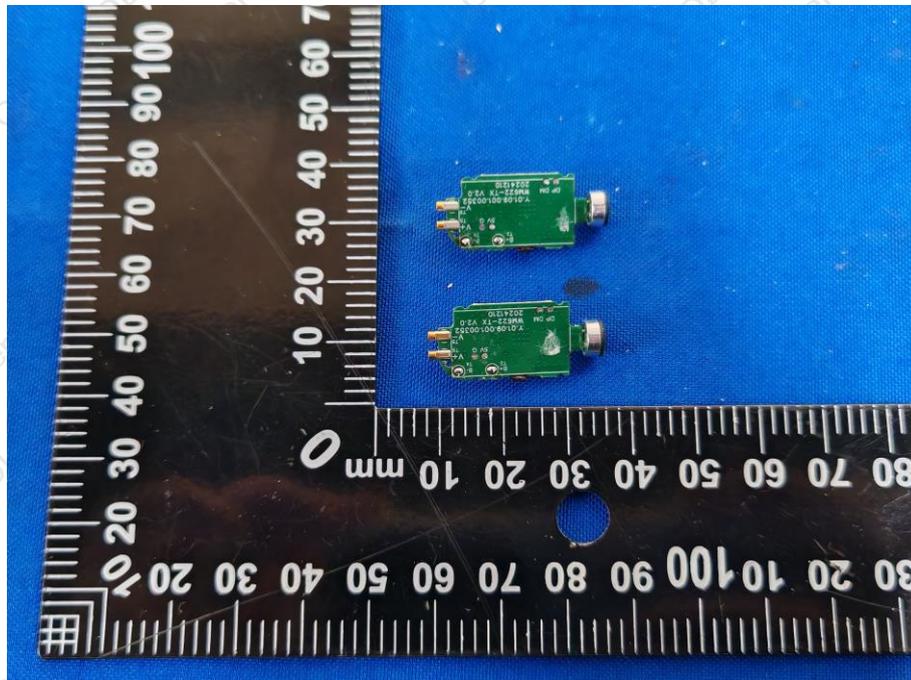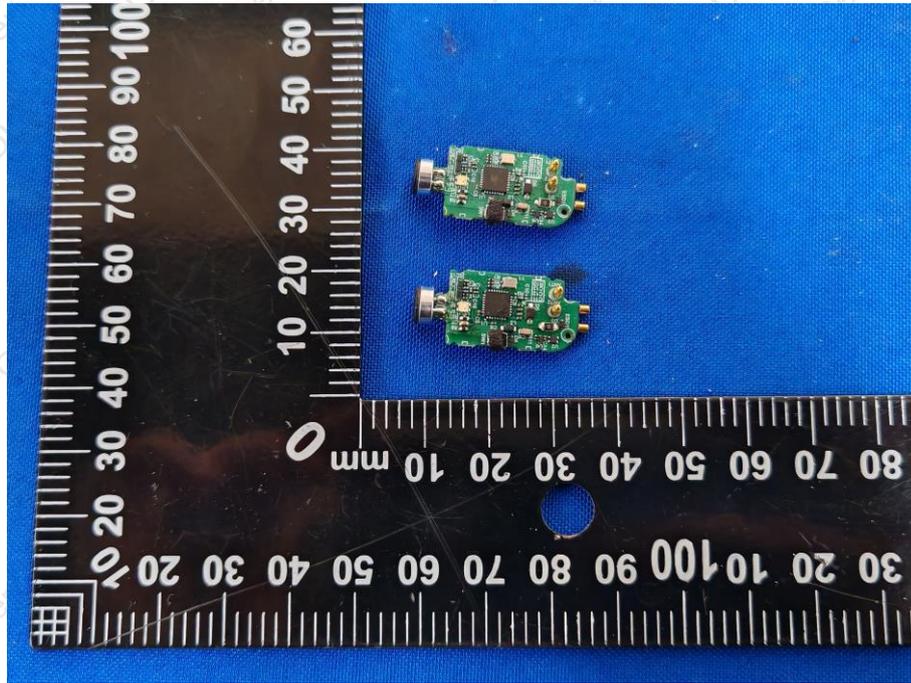

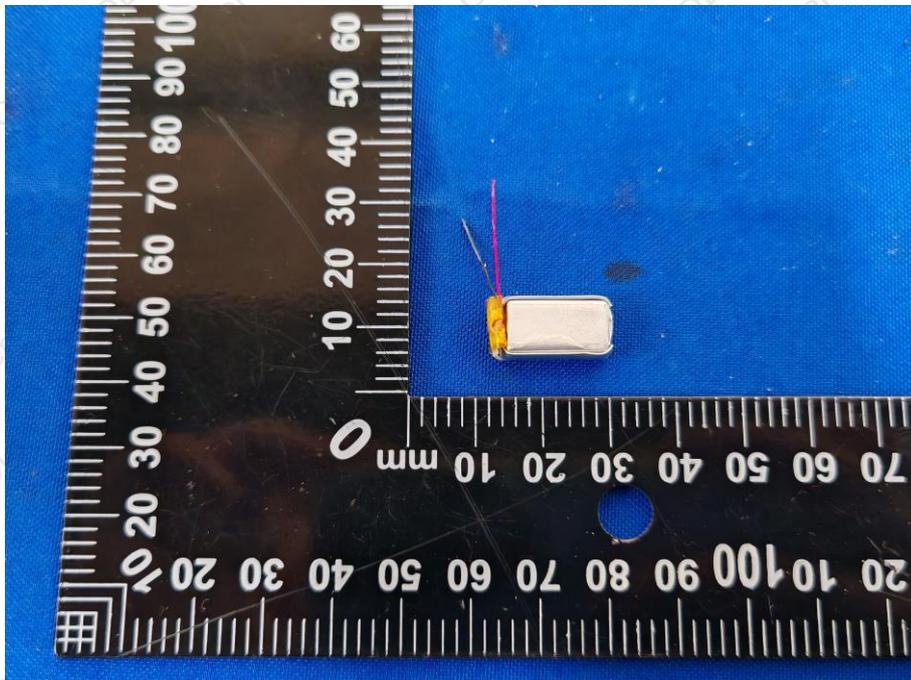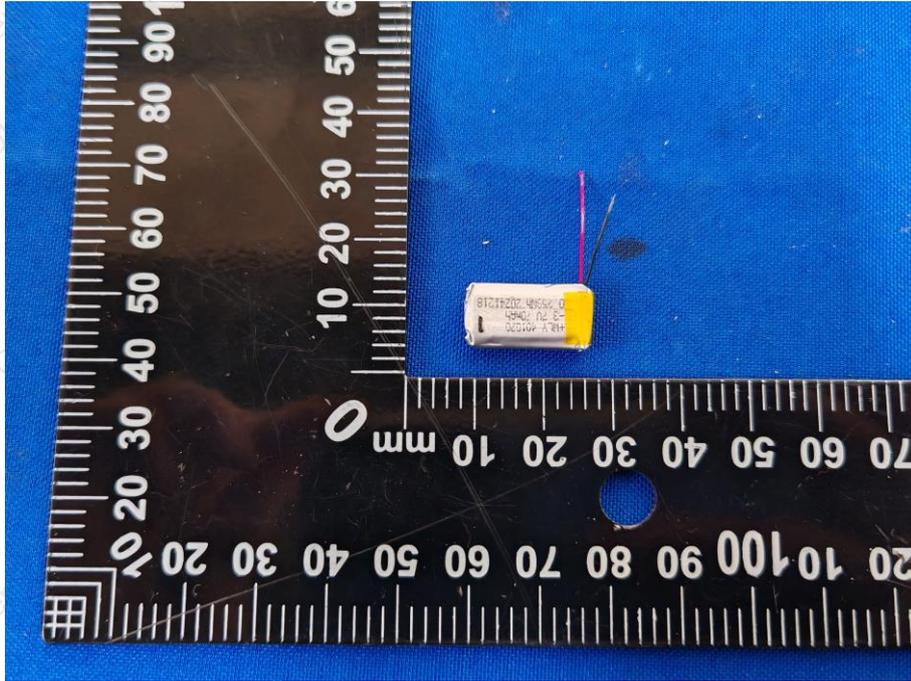

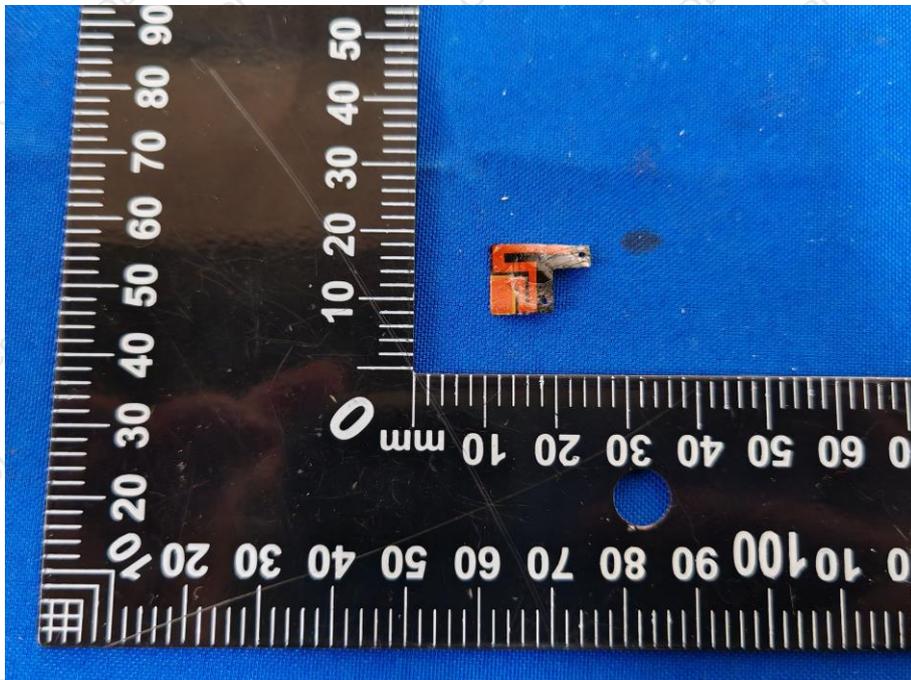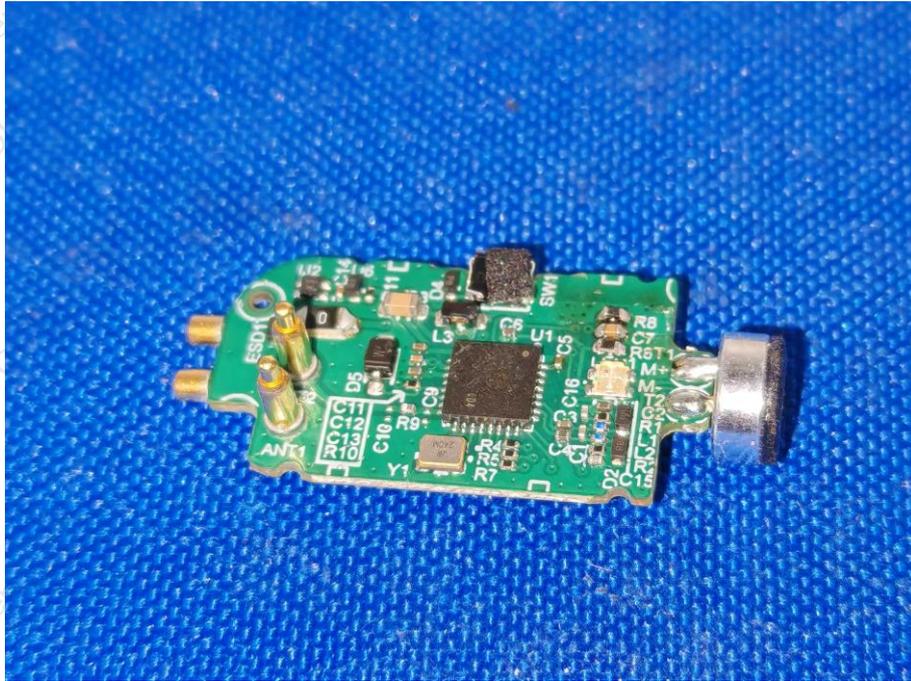

***** END OF REPORT *****