

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: EN 300 328 V2.2.2 (2019-07)
Report No.: REBBUI-WTW-P22100653
Product: 11ax RTL8851BE Combo module
Brand: REALTEK
Model No.: RTL8851BE
Received Date: 2022/10/25
Test Date: 2022/12/12 ~ 2023/3/20
Issued Date: 2023/4/27

Applicant: Realtek Semiconductor Corp.
Address: No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan
Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory
Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

Approved by: _____



, Date: _____

2023/4/27

May Chen / Manager

This test report consists of 79 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Vito Lung / Specialist



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description	7
3.2 Antenna Description of EUT	8
3.3 Channel List.....	9
3.4 Test Mode Applicability and Tested Channel Detail.....	10
3.5 Test Program Used and Operation Descriptions	13
3.6 Connection Diagram of EUT and Peripheral Devices	13
3.7 Configuration of Peripheral Devices and Cable Connections	14
4 Test Instruments	15
4.1 RF Output Power.....	15
4.2 Power Spectral Density	15
4.3 Adaptivity	16
4.4 Occupied Channel Bandwidth	16
4.5 Transmitter Unwanted Emissions in the out-of-band Domain.....	16
4.6 Transmitter Unwanted Emissions in the Spurious Domain up to 1 GHz.....	16
4.7 Transmitter Unwanted Emissions in the Spurious Domain above 1 GHz	17
4.8 Receiver Spurious Emissions up to 1 GHz	17
4.9 Receiver Spurious Emissions above 1 GHz	18
4.10 Receiver Blocking.....	18
5 Limits of Test Items.....	19
5.1 RF Output Power.....	19
5.2 Power Spectral Density	19
5.3 Adaptivity	19
5.4 Occupied Channel Bandwidth	20
5.5 Transmitter Unwanted Emissions in the out-of-band Domain.....	20
5.6 Transmitter Unwanted Emissions in the Spurious Domain up to 1 GHz.....	20
5.7 Transmitter Unwanted Emissions in the Spurious Domain above 1 GHz	21
5.8 Receiver Spurious Emissions up to 1 GHz	21
5.9 Receiver Spurious Emissions above 1 GHz	21
5.10 Receiver Blocking.....	21
6 Test Arrangements.....	22
6.1 RF Output Power.....	22
6.2 Power Spectral Density	22
6.3 Adaptivity	22
6.4 Occupied Channel Bandwidth	22
6.5 Transmitter Unwanted Emissions in the out-of-band Domain.....	22
6.6 Transmitter Unwanted Emissions in the Spurious Domain up to 1 GHz.....	22
6.7 Transmitter Unwanted Emissions in the Spurious Domain above 1 GHz	22
6.8 Receiver Spurious Emissions up to 1 GHz	22
6.9 Receiver Spurious Emissions above 1 GHz	22
6.10 Receiver Blocking.....	23
7 Test Results of Test Item	24
7.1 RF Output Power.....	24
7.2 Power Spectral Density	26
7.3 Adaptivity	28
7.4 Occupied Channel Bandwidth	56
7.5 Transmitter Unwanted Emissions in the out-of-band Domain.....	59
7.6 Transmitter Unwanted Emissions in the Spurious Domain up to 1 GHz.....	61



7.7	Transmitter Unwanted Emissions in the Spurious Domain above 1 GHz	67
7.8	Receiver Spurious Emissions up to 1 GHz	70
7.9	Receiver Spurious Emissions above 1 GHz	73
7.10	Receiver Blocking.....	74
8	Pictures of Test Arrangements	76
9	Information of the Testing Laboratories	79



Release Control Record

Issue No.	Description	Date Issued
REBBUI-WTW-P22100653	Original release.	2023/4/27

1 Certificate

Product: 11ax RTL8851BE Combo module

Brand: REALTEK

Test Model: RTL8851BE

Sample Status: Engineering sample

Applicant: Realtek Semiconductor Corp.

Test Date: 2022/12/12 ~ 2023/3/20

Standard: EN 300 328 V2.2.2 (2019-07)

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

EN 300 328 V2.2.2		
Clause	Test Item	Result
4.3.2.2	RF Output Power	Pass
4.3.2.3	Power Spectral Density	Pass
4.3.2.4	Duty cycle, Tx-sequence, Tx-gap	Not Applicable
4.3.2.5	Medium Utilization (MU) Factor	Not Applicable
4.3.2.6	Adaptivity	Pass
4.3.2.7	Occupied Channel Bandwidth	Pass
4.3.2.8	Transmitter Unwanted Emissions in the out-of-band Domain	Pass
4.3.2.9	Transmitter Unwanted Emissions in the Spurious Domain up to 1 GHz	Pass
4.3.2.9	Transmitter Unwanted Emissions in the Spurious Domain above 1 GHz	Pass
4.3.2.10	Receiver Spurious Emissions up to 1 GHz	Pass
4.3.2.10	Receiver Spurious Emissions above 1 GHz	Pass
4.3.2.11	Receiver Blocking	Pass
4.3.2.12	Geo-location capability	Not Applicable

Notes:

1. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in ETSI TR 100 028-1:

Parameter	Uncertainty (±)
Occupied Channel Bandwidth	$1.132 \times 10^{-4} \%$
RF output power, conducted	1.371 dB
Power Spectral Density, conducted	1.371 dB
Unwanted Emissions, conducted	2.5 dB
All emissions, radiated	4.9 dB
Temperature	0.12 °C
Supply voltages	0.3%
Time	2.53%

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	11ax RTL8851BE Combo module
Brand	REALTEK
Test Model	RTL8851BE
Status of EUT	Engineering sample
Power Supply Rating	3.3Vdc from host equipment
Temperature Operating Range	-20 °C ~ 70 °C
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in VHT mode 1024QAM for OFDMA in 11ax mode only
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11g: up to 54 Mbps 802.11n: up to 150 Mbps VHT: up to 200 Mbps 802.11ax: up to 286.8 Mbps
Operating Frequency	2.412 GHz ~ 2.472 GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 13 802.11n (HT40), VHT40, 802.11ax (HE40): 9
Resource Unit (RU)	Single RU: 26-tone, 52-tone, 106-tone, 242-tone, 484-tone
Output Power (e.i.r.p.)	19.98 dBm
EUT Category	Adaptive Equipment without the possibility to switch to a non-adaptive mode
Adaptive Operational Mode	Load Based Equipment(Not using any of the mechanisms referenced)
Receiver Category	Category 1

Note:

1. The EUT has below HW SKU configuration, as below table:

SKU No.	Product name	HW Configuration
1	11ax RTL8851BE Combo module	PCIe + USB interface + Dual antenna port
2		PCIe + USB interface + Single antenna port

Note: For spurious emissions: From the above HW SKUs, the worse case was found in **SKU No.: 2**. Therefore only the test data of the SKU was recorded in this report.

2. There are Bluetooth and WLAN (2.4 GHz & 5 GHz) technology used for the EUT.

3. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (5 GHz)	Bluetooth
2	WLAN (2.4 GHz)	Bluetooth

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The EUT support OFDMA and Partial RU mode, therefore partial RU combination were investigated and the worst case scenario was identified.

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna NO.	RF Chain NO.	Brand	Model	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type	Cable Length (mm)
1	Chain 1	REALTEK	RTK-ANT-0022	3.4	2.4~2.4835GHz	PIFA	IPEX4	300
				5	5.15~5.85GHz			
	Chain 2	REALTEK	RTK-ANT-0022	3.4	2.4~2.4835GHz	PIFA	IPEX4	
				5	5.15~5.85GHz			
2	Chain 1	Aristotle	RFA-27-C38H1-MHF4300	3	2.4~2.4835GHz	Dipole	IPEX4	300
				5	5.15~5.85GHz			
	Chain 2	Aristotle	RFA-27-C38H1-MHF4300	3	2.4~2.4835GHz	Dipole	IPEX4	
				5	5.15~5.85GHz			
3	Chain 1	LYNwave	ALX22F-120AA0-00	3.2	2.4~2.4835GHz	Monopole	IPEX4	200
				4	5.15~5.85GHz			
	Chain 2	LYNwave	ALX22F-120AA0-00	3.2	2.4~2.4835GHz	Monopole	IPEX4	
				4	5.15~5.85GHz			

Note:

1. Max. gain was selected for the final test, except for Spurious Emissions & Adaptivity test.

*The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2. The EUT incorporates a SISO function:

2.4 GHz Band		
Modulation Mode	TX & RX Configuration	
802.11b	1TX Diversity	1RX
802.11g	1TX Diversity	1RX
802.11n (HT20)	1TX Diversity	1RX
802.11n (HT40)	1TX Diversity	1RX
VHT20	1TX Diversity	1RX
VHT40	1TX Diversity	1RX
802.11ax (HE20)	1TX Diversity	1RX
802.11ax (HE40)	1TX Diversity	1RX
802.11ax (RU26/52/106/242/484)	1TX Diversity	1RX

Note:

1. The modulation and bandwidth are similar for 802.11n mode for 20 MHz (40 MHz) and VHT mode for 20 MHz (40 MHz), therefore the manufacturer will control the power for 802.11n/VHT mode is the same as the 802.11ax or more lower than it and investigated worst case to representative mode in test report.

3.3 Channel List

13 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412 MHz	8	2447 MHz
2	2417 MHz	9	2452 MHz
3	2422 MHz	10	2457 MHz
4	2427 MHz	11	2462 MHz
5	2432 MHz	12	2467 MHz
6	2437 MHz	13	2472 MHz
7	2442 MHz		

9 channels are provided for 802.11n (HT40), VHT40, 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422 MHz	8	2447 MHz
4	2427 MHz	9	2452 MHz
5	2432 MHz	10	2457 MHz
6	2437 MHz	11	2462 MHz
7	2442 MHz		

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	<p>1. PIFA/Monopole ANT can be used in the following ways: X / Y / Z axis. Pre-scan in these ways and find the worst case as a representative test condition.</p> <p>2. For Partial RU modes of 20MHz and 40MHz bandwidth needs to be pre-worst.</p> <p>3. EUT has two types of patterns. dual port sampling(1Tx Diversity)/single port sampling(Fixed Chain1). Pre-scan in these ways to find the worst case as a representative test condition.</p> <p>4. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).</p>
Worst Case:	<p>1. PIFA/Monopole ANT the worst case was found when positioned on (X / Y / Z axis): Transmitter Unwanted Emissions in the Spurious Domain up to 1 GHz Z-axis worst ; Transmitter Unwanted Emissions in the Spurious Domain above 1 GHz Z-axis worst.</p> <p>2. The worst case occurs in 20MHz bandwidth(partial RU 26/52/106).</p> <p>3. dual port sampling/single port sampling types Worst Condition: single port sampling</p>

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Tested Channel	Modulation	Data Rate Parameter	RU Configuration	Special requirements
RF Output Power / Power Spectral Density	-	802.11b	1, 7, 13	DBPSK	1Mb/s	-	-
		802.11g	1, 7, 13	BPSK	6Mb/s	-	
		VHT20	1, 7, 13	BPSK	MCS0	-	
		VHT40	3, 7, 11	BPSK	MCS0	-	
		802.11ax (HE20)	1, 7, 13	BPSK	MCS0	-	
		802.11ax (HE40)	3, 7, 11	BPSK	MCS0	-	
		20 MHz Preamble 802.11ax (RU26)	1, 7, 13	BPSK	MCS0	26/0, 26/4, 26/8	
		20 MHz Preamble 802.11ax (RU52)	1, 7, 13	BPSK	MCS0	52/37, 52/39, 52/40	
20 MHz Preamble 802.11ax (RU106)	1, 7, 13	BPSK	MCS0	106/53, 106/54, 106/54			
Adaptivity	-	802.11b	1, 13	-	1Mb/s	-	-
		802.11g	1, 13	-	6Mb/s	-	
		802.11ax (HE20)	1, 13	-	MCS0	-	
		802.11ax (HE40)	3, 11	-	MCS0	-	
		802.11b	1, 13	-	1Mb/s	-	Add Test low antenna gain
		802.11g	1, 13	-	6Mb/s	-	
		802.11ax (HE20)	1, 13	-	MCS0	-	
		802.11ax (HE40)	3, 11	-	MCS0	-	

Test Item	EUT Configure Mode	Mode	Tested Channel	Modulation	Data Rate Parameter	RU Configuration	Special requirements
Occupied Channel Bandwidth / Transmitter Unwanted Emissions in the out-of-band Domain	-	802.11b	1, 13	DBPSK	1Mb/s	-	-
		802.11g	1, 13	BPSK	6Mb/s	-	
		802.11ax (HE20)	1, 13	BPSK	MCS0	-	
		802.11ax (HE40)	3, 11	BPSK	MCS0	-	
		20 MHz Preamble 802.11ax (RU26)	1, 13	BPSK	MCS0	26/0, 26/8	
		20 MHz Preamble 802.11ax (RU52)	1, 13	BPSK	MCS0	52/37, 52/40	
		20 MHz Preamble 802.11ax (RU106)	1, 13	BPSK	MCS0	106/53, 106/54	
Transmitter Unwanted Emissions in the Spurious Domain up to 1 GHz	A	802.11b	13	DBPSK	1Mb/s	-	-
	B	802.11b					
	C	802.11b					
	A	20 MHz Preamble 802.11ax (RU26)	13	BPSK	MCS0	26/8	
	B	20 MHz Preamble 802.11ax (RU26)				26/8	
	C	20 MHz Preamble 802.11ax (RU26)				26/8	
Transmitter Unwanted Emissions in the Spurious Domain above 1 GHz	A	802.11b	1, 13	DBPSK	1Mb/s	-	-
	B	802.11b					
	C	802.11b					
	A	20 MHz Preamble 802.11ax (RU26)	1, 13	BPSK	MCS0	26/0, 26/8	
	B	20 MHz Preamble 802.11ax (RU26)				26/0, 26/8	
	C	20 MHz Preamble 802.11ax (RU26)				26/0, 26/8	




Test Item	EUT Configure Mode	Mode	Tested Channel	Modulation	Data Rate Parameter	RU Configuration	Special requirements
Receiver Spurious Emissions up to 1 GHz	A	Receiver	13	-	-	-	-
	B						
	C						
Receiver Spurious Emissions above 1 GHz	A	Receiver	1, 13	-	-	-	-
	B						
	C						
Receiver Blocking	-	802.11b	1, 13	DBPSK	1Mb/s	-	-
							Add Test Worst Pmin
EUT Configure Mode:	A	with Dipole Antenna					
	B	with PIFA Antenna					
	C	with Monopole Antenna					

3.5 Test Program Used and Operation Descriptions

Controlling software (RTL8851B_PCIE_MP_Package_ALPHA_v2.0.23_homologation(98236)) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.6 Connection Diagram of EUT and Peripheral Devices

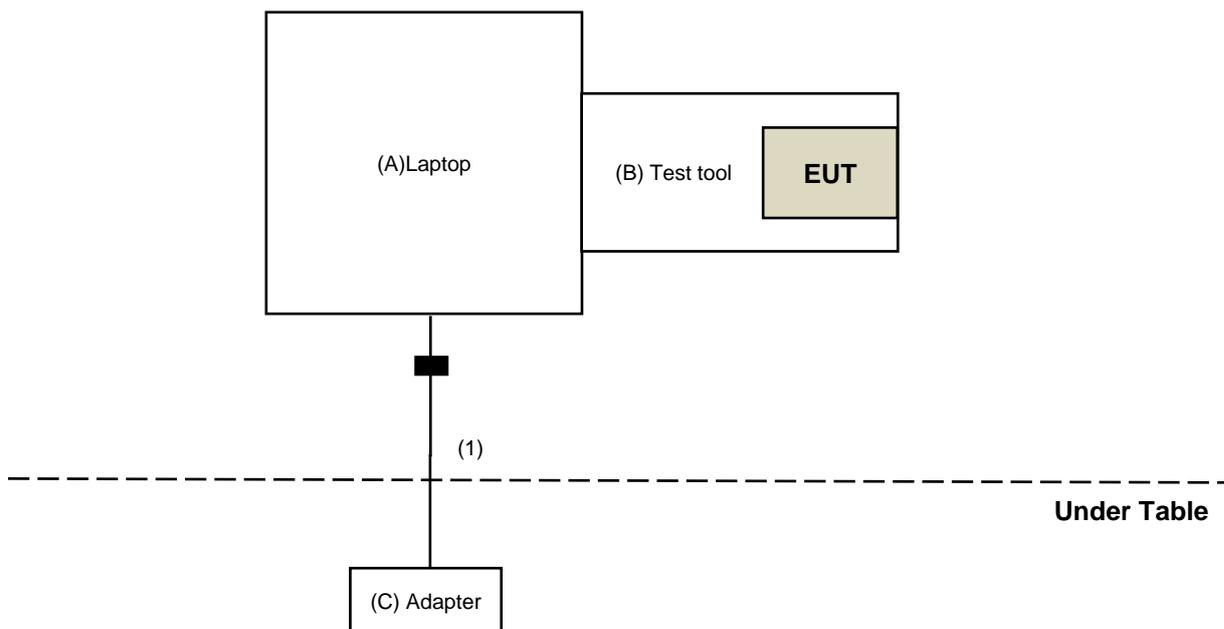

3.7 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Dell	Latitude 7430	8C19NN3	N/A	Provided by Lab
B	Test tool	Realtek	N/A	N/A	N/A	Supplied by applicant
C	Adapter	DELL	LA90PM111	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.8	NO	1	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
MXG X-Series RF Vector Signal Generator Keysight	N5182B	MY53052700	2022/7/18	2023/7/17
Power Meter Anritsu	ML2495A	1529002	2022/6/22	2023/6/21
PSG analog signal generator (from 250 kHz to 50 GHz) Keysight	E8257D	MY53401987	2022/6/21	2023/6/20
PXA Signal Analyzer(3 Hz to 50 GHz) Keysight	N9030A	MY54490570	2022/6/20	2023/6/19
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
Temperature & Humidity Chamber TERCHY	MHU-225AU	911033	2022/11/18	2023/11/17

Notes:

1. The test was performed in Oven room 1.
2. Tested Date: 2022/12/12 ~ 2023/1/15

4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
MXG X-Series RF Vector Signal Generator Keysight	N5182B	MY53052700	2022/7/18	2023/7/17
PSG analog signal generator (from 250 kHz to 50 GHz) Keysight	E8257D	MY53401987	2022/6/21	2023/6/20
PXA Signal Analyzer(3 Hz to 50 GHz) Keysight	N9030A	MY54490570	2022/6/20	2023/6/19
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 1.
2. Tested Date: 2022/12/12 ~ 2023/1/15

4.3 Adaptivity

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Combiner / Splitter (Model:ZN2PD-9G) Mini-Circuits	ZN2PD-9G	ZN2PD-9G	2022/6/9	2023/6/8
MXG Vector signal generator KEYSIGHT	N5182B	MY53052282	2023/1/6	2024/1/5
N9030B - PXA Signal Analyzer KEYSIGHT	N9030B	MY57140488	2023/3/6	2024/3/5
PXA KEYSIGHT	N9030B	MY57140953	2022/7/1	2023/6/30
Signal Analyzer R&S	FSV7	104056	2022/5/20	2023/5/19
Spectrum Analyzer R&S	FSV40	100979	2022/3/25	2023/3/24

Notes:

1. The test was performed in Adaptivity room.
2. Tested Date: 2023/3/20

4.4 Occupied Channel Bandwidth

Refer to section 4.2 to get information of the instruments.

4.5 Transmitter Unwanted Emissions in the out-of-band Domain

Refer to section 4.2 to get information of the instruments.

4.6 Transmitter Unwanted Emissions in the Spurious Domain up to 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208411	N/A	N/A
Power Meter Anritsu	ML2495A	0824006	2022/5/9	2023/5/8
		1529002	2022/6/22	2023/6/21
Preamplifier Agilent	8447D	2944A10663	2022/4/25	2023/4/24
PSG analog signal generator (from 250 kHz to 50 GHz) Keysight	E8257D	MY53401987	2022/6/21	2023/6/20
Pulse Power Sensor Anritsu	MA2411B	1339443	2022/5/29	2023/5/28
		1726432	2022/5/29	2023/5/28
PXA Signal Analyzer(3 Hz to 50 GHz) Keysight	N9030A	MY54490570	2022/6/20	2023/6/19
Software	ADT_Radiated_V7.6.15.9.5	N/A	N/A	N/A
Trilog Broadband Antenna Schwarzbeck	VULB 9168	9168-162	2022/10/20	2023/10/19

Notes:

1. The test was performed in RF Fully Chamber No. 1.
2. Tested Date: 2022/12/30

4.7 Transmitter Unwanted Emissions in the Spurious Domain above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208542	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120 D	9120D-1479	2022/11/13	2023/11/12
Power Meter Anritsu	ML2495A	1529002	2022/6/22	2023/6/21
	ML2496A	1529003	2022/8/8	2023/8/7
Pre-Amplifier Agilent 8449B (1 to 26.5GHz) Agilent	8449B	3008A01922	2022/8/15	2023/8/14
PSG analog signal generator (from 250 kHz to 50 GHz) Keysight	E8257D	MY53401987	2022/6/21	2023/6/20
Pulse Power Sensor Anritsu	MA2411B	1339443	2022/5/29	2023/5/28
		1726432	2022/5/29	2023/5/28
Software	ADT_Radiated_V7.6.15.9.5	N/A	N/A	N/A
Spectrum Analyzer Keysight	N9030A	MY54490520	2022/8/5	2023/8/4

Notes:

1. The test was performed in RF Fully Chamber No. 2.
2. Tested Date: 2022/12/14 ~ 2022/12/22

4.8 Receiver Spurious Emissions up to 1 GHz

Refer to section 4.6 to get information of the instruments.

4.9 Receiver Spurious Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208542	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120 D	9120D-1479	2022/11/13	2023/11/12
Power Meter Anritsu	ML2495A	1529002	2022/6/22	2023/6/21
	ML2496A	1529003	2022/8/8	2023/8/7
Pre-Amplifier Agilent 8449B (1 to 26.5GHz) Agilent	8449B	3008A01922	2022/8/15	2023/8/14
PSG analog signal generator (from 250 kHz to 50 GHz) Keysight	E8257D	MY53401987	2022/6/21	2023/6/20
Pulse Power Sensor Anritsu	MA2411B	1339443	2022/5/29	2023/5/28
		1726432	2022/5/29	2023/5/28
Software	ADT_Radiated_V7.6.15.9.5	N/A	N/A	N/A
Spectrum Analyzer Keysight	N9030A	MY54490520	2022/8/5	2023/8/4

Notes:

1. The test was performed in RF Fully Chamber No. 2.
2. Tested Date: 2022/12/14 ~ 2022/12/16

4.10 Receiver Blocking

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
AD1AD191XA one box tester Anritsu	MT8860C	1705001	2022/2/21	2023/2/20
Combiner / Splitter (Model:ZN2PD- 9G) Mini-Circuits	ZN2PD-9G	ZN2PD-9G	2022/6/9	2023/6/8
MXG -X Vector Signal Generator KEYSIGHT	N5182B	MY57301272	2022/3/13	2023/3/12
N9030B - PXA Signal Analyzer KEYSIGHT	N9030B	MY57140938	2022/3/15	2023/3/14
Signal Analyzer R&S	FSV7	104056	2022/5/20	2023/5/19
Spectrum Analyzer R&S	FSV40	100979	2022/3/25	2023/3/24

Notes:

1. The test was performed in Adaptivity room.
2. Tested Date: 2023/1/16 ~ 2023/1/17

5 Limits of Test Items

5.1 RF Output Power

Condition	Frequency Band	Limit (e.i.r.p.)
Under all test conditions	2400 ~ 2483.5 MHz	20 dBm

5.2 Power Spectral Density

Condition	Frequency Band	Limit (e.i.r.p.)
Under normal conditions	2400 ~ 2483.5 MHz	10 dBm / 1 MHz

5.3 Adaptivity

Applicability of adaptive requirements and limit for wide band modulation techniques

Requirement	Operational Mode			
	DAA mechanism	LBT mechanism		
		Frame Based Equipment	Load Based Equipment (Base on 'Spectrum Sharing' mechanisms)	Load Based Equipment (Not using any of the mechanisms referenced)
Minimum Clear Channel Assessment (CCA) Time	NA	18 us	(see note 1)	18 us
Maximum Channel Occupancy (COT) Time	40 ms	1 ms - 10 ms	(see note 1)	13 ms
Minimum Idle Period	5% of COT	5% of COT	(see note 1)	18 us (see note 2)
Extended CCA check	NA	NA	(see note 1)	18 us – 160 us
Short Control Signalling Transmissions	Maximum duty cycle of 10 % within an observation period of 50 ms (see note 3)			

NOTE 1: Load Based Equipment may implement an LBT based spectrum sharing mechanism based on the Clear Channel Assessment (CCA) mode using energy detect as described in IEEE 802.11™ [i.3], clause 10 clause 11, clause 15, clause 16, clause 18 and clause 19, or in IEEE 802.15.4™ [i.4], clause 5, clause 6 and clause 10

NOTE 2: The Idle Period in between transmissions is considered to be the CCA or the Extended CCA check as there are no transmissions during this period.

NOTE 3: Adaptive equipment may or may not have Short Control Signalling Transmissions.

Threshold Level for LBT mechanism (Load Based Equipment)	
Maximum transmit power (P _H) EIRP dBm	Threshold level (TL) (see notes 1 and 2)
20	-70 dBm / MHz

NOTE 1: For a 20 dBm e.i.r.p. transmitter the CCA threshold level (TL) shall be equal to or less than -70 dBm/MHz at the input to the receiver assuming a 0 dBi (receive) antenna assembly. This threshold level (TL) may be corrected for the (receive) antenna assembly gain (G).

NOTE 2: For power levels less than 20 dBm e.i.r.p. the CCA threshold level may be relaxed to:
 $TL = -70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW} / P_{out})$; (P_{out} in mW e.i.r.p.)

Unwanted signal parameters for LBT mechanism (Load Based Equipment)		
Wanted signal mean power from companion device	Unwanted signal frequency (MHz)	Unwanted signal power (dBm)
sufficient to maintain the link (see note 2)	2 395 or 2 488.5 (see note 1)	-35 (see note 3)

NOTE 1: The highest frequency shall be used for testing operating channels within the range 2 400 MHz to 2 442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483.5 MHz. See clause 5.4.6.1.

NOTE 2: A typical value which can be used in most cases is -50 dBm/MHz.


NOTE 3: The level specified is the level in front of the UUT antenna. In case of conducted measurements, this level has to be corrected by the actual antenna assembly gain.

5.4 Occupied Channel Bandwidth

Condition		Limit
All types of equipment		Shall fall completely within the band 2400 to 2483.5 MHz.
Additional requirement	For non-adaptive non-FHSS system and e.i.r.p >10 dBm.	Less than 20 MHz
	For non-adaptive Frequency Hopping system and e.i.r.p >10 dBm.	Less than 5 MHz

5.5 Transmitter Unwanted Emissions in the out-of-band Domain

Condition	Limit
Under normal conditions	The transmitter unwanted emissions in the out-of-band domain shall not exceed the values provided by the mask in below figure.

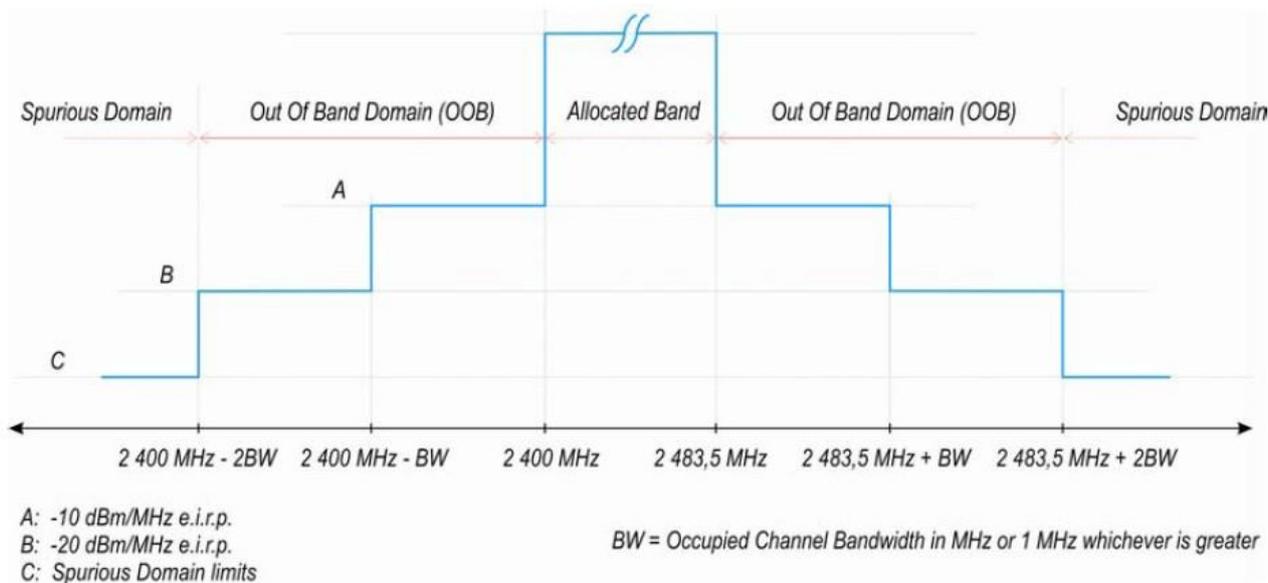

5.6 Transmitter Unwanted Emissions in the Spurious Domain up to 1 GHz

Frequency Range	Maximum Power Limit	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87.5 MHz	-36 dBm	100 kHz
87.5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz

Note: These limits are e.i.r.p. for emissions up to 1 GHz.

5.7 Transmitter Unwanted Emissions in the Spurious Domain above 1 GHz

Frequency Range	Maximum Power Limit	Bandwidth
1 GHz to 12.75 GHz	-30 dBm	1 MHz

Note: These limits are e.i.r.p. for emissions above 1 GHz.

5.8 Receiver Spurious Emissions up to 1 GHz

Frequency Range	Maximum Power Limit	Bandwidth
30 MHz to 1 GHz	-57 dBm	100 kHz

Note: These limits are e.r.p. for emissions up to 1 GHz.

5.9 Receiver Spurious Emissions above 1 GHz

Frequency Range	Maximum Power Limit	Bandwidth
1 GHz to 12.75 GHz	-47 dBm	1 MHz

Note: These limits are e.i.r.p. for emissions above 1 GHz.

5.10 Receiver Blocking

Receiver Category 1 Equipment			
Wanted signal mean power from companion device (dBm) (see notes 1 to 4)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm) (see note 4)	Type of blocking signal
(-133 dBm + 10 × log ₁₀ (OCBW)) or -68 dBm whichever is less (see note 2)	2 380	-34	CW
	2 504		
(-139 dBm + 10 × log ₁₀ (OCBW)) or -74 dBm whichever is less (see note 3)	2 300		
	2 330		
	2 360		
	2 524		
	2 584		
	2 674		

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 26 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 20 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured / positioned as recorded in clause 5.4.3.2.2.

6 Test Arrangements

6.1 RF Output Power

Test procedure refer to chapter 5.4.2 of EN 300 328 V2.2.2.

Measurement Method	Conducted measurement
---------------------------	-----------------------

6.2 Power Spectral Density

Test procedure refer to chapter 5.4.3 of EN 300 328 V2.2.2.

Measurement Method	Conducted measurement
Option 1: For equipment with continuous and non-continuous transmissions	

6.3 Adaptivity

Test procedure refer to chapter 5.4.6 of EN 300 328 V2.2.2.

Measurement Method	Conducted measurement
---------------------------	-----------------------

6.4 Occupied Channel Bandwidth

Test procedure refer to chapter 5.4.7 of EN 300 328 V2.2.2.

Measurement Method	Conducted measurement
---------------------------	-----------------------

6.5 Transmitter Unwanted Emissions in the out-of-band Domain

Test procedure refer to chapter 5.4.8 of EN 300 328 V2.2.2.

Measurement Method	Conducted measurement
---------------------------	-----------------------

6.6 Transmitter Unwanted Emissions in the Spurious Domain up to 1 GHz

Test procedure refer to chapter 5.4.9 of EN 300 328 V2.2.2.

Measurement Method	Radiated measurement
---------------------------	----------------------

6.7 Transmitter Unwanted Emissions in the Spurious Domain above 1 GHz

Test procedure refer to chapter 5.4.9 of EN 300 328 V2.2.2.

Measurement Method	Radiated measurement
---------------------------	----------------------

6.8 Receiver Spurious Emissions up to 1 GHz

Test procedure refer to chapter 5.4.10 of EN 300 328 V2.2.2.

Measurement Method	Radiated measurement
---------------------------	----------------------

6.9 Receiver Spurious Emissions above 1 GHz

Test procedure refer to chapter 5.4.10 of EN 300 328 V2.2.2.

Measurement Method	Radiated measurement
---------------------------	----------------------

6.10 Receiver Blocking

Test procedure refer to chapter 5.4.11 of EN 300 328 V2.2.2.

Measurement Method	Conducted measurement
--------------------	-----------------------

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Dolly Chung
--------------	---------	---------------------------	--------------	------------	-------------

802.11b

Channel	Frequency (MHz)	EIRP (dBm)			Limit (dBm)	Test Result
		Test Conditions				
		25 °C	-20 °C	70 °C		
1	2412	19.45	19.70	19.18	20	Pass
7	2442	19.42	19.71	19.18	20	Pass
13	2472	19.47	19.74	19.20	20	Pass

802.11g

Channel	Frequency (MHz)	EIRP (dBm)			Limit (dBm)	Test Result
		Test Conditions				
		25 °C	-20 °C	70 °C		
1	2412	19.64	19.93	19.32	20	Pass
7	2442	19.65	19.98	19.44	20	Pass
13	2472	19.62	19.90	19.25	20	Pass

VHT20

Channel	Frequency (MHz)	EIRP (dBm)			Limit (dBm)	Test Result
		Test Conditions				
		25 °C	-20 °C	70 °C		
1	2412	19.64	19.96	19.30	20	Pass
7	2442	19.66	19.95	19.30	20	Pass
13	2472	19.62	19.95	19.22	20	Pass

VHT40

Channel	Frequency (MHz)	EIRP (dBm)			Limit (dBm)	Test Result
		Test Conditions				
		25 °C	-20 °C	70 °C		
3	2422	19.60	19.94	19.36	20	Pass
7	2442	19.55	19.89	19.17	20	Pass
11	2462	19.62	19.93	19.29	20	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	EIRP (dBm)			Limit (dBm)	Test Result
		Test Conditions				
		25 °C	-20 °C	70 °C		
1	2412	19.66	19.94	19.38	20	Pass
7	2442	19.70	19.95	19.36	20	Pass
13	2472	19.65	19.95	19.27	20	Pass

802.11ax (HE40)

Channel	Frequency (MHz)	EIRP (dBm)			Limit (dBm)	Test Result
		Test Conditions				
		25 °C	-20 °C	70 °C		
3	2422	19.63	19.95	19.43	20	Pass
7	2442	19.58	19.91	19.24	20	Pass
11	2462	19.64	19.90	19.35	20	Pass

802.11ax (HE20) RU26

Channel	Frequency (MHz)	EIRP (dBm)			Limit (dBm)	Test Result
		Test Conditions				
		25 °C	-20 °C	70 °C		
1	2412	12.80	13.08	12.52	20	Pass
7	2442	12.87	13.12	12.53	20	Pass
13	2472	12.74	13.04	12.36	20	Pass

802.11ax (HE20) RU52

Channel	Frequency (MHz)	EIRP (dBm)			Limit (dBm)	Test Result
		Test Conditions				
		25 °C	-20 °C	70 °C		
1	2412	15.63	15.91	15.35	20	Pass
7	2442	15.61	15.86	15.27	20	Pass
13	2472	15.75	16.05	15.37	20	Pass

802.11ax (HE20) RU106

Channel	Frequency (MHz)	EIRP (dBm)			Limit (dBm)	Test Result
		Test Conditions				
		25 °C	-20 °C	70 °C		
1	2412	18.72	19.00	18.44	20	Pass
7	2442	18.69	18.94	18.35	20	Pass
13	2472	18.64	18.94	18.26	20	Pass

7.2 Power Spectral Density

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Dolly Chung
--------------	---------	---------------------------	--------------	------------	-------------

802.11b

Channel	Frequency (MHz)	EIRP PSD (dBm/MHz)	PSD Limit (dBm)	Test Result
1	2412	9.84	10	Pass
7	2442	9.80	10	Pass
13	2472	9.85	10	Pass

802.11g

Channel	Frequency (MHz)	EIRP PSD (dBm/MHz)	PSD Limit (dBm)	Test Result
1	2412	7.97	10	Pass
7	2442	7.99	10	Pass
13	2472	7.94	10	Pass

VHT20

Channel	Frequency (MHz)	EIRP PSD (dBm/MHz)	PSD Limit (dBm)	Test Result
1	2412	7.43	10	Pass
7	2442	7.46	10	Pass
13	2472	7.40	10	Pass

VHT40

Channel	Frequency (MHz)	EIRP PSD (dBm/MHz)	PSD Limit (dBm)	Test Result
3	2422	4.18	10	Pass
7	2442	4.15	10	Pass
11	2462	4.17	10	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	EIRP PSD (dBm/MHz)	PSD Limit (dBm)	Test Result
1	2412	7.45	10	Pass
7	2442	7.50	10	Pass
13	2472	7.43	10	Pass

802.11ax (HE40)

Channel	Frequency (MHz)	EIRP PSD (dBm/MHz)	PSD Limit (dBm)	Test Result
3	2422	4.21	10	Pass
7	2442	4.18	10	Pass
11	2462	4.19	10	Pass

802.11ax (HE20) RU26

Channel	Frequency (MHz)	EIRP PSD (dBm/MHz)	PSD Limit (dBm)	Test Result
1	2412	9.93	10	Pass
7	2442	9.70	10	Pass
13	2472	9.89	10	Pass

802.11ax (HE20) RU52

Channel	Frequency (MHz)	EIRP PSD (dBm/MHz)	PSD Limit (dBm)	Test Result
1	2412	9.87	10	Pass
7	2442	9.61	10	Pass
13	2472	9.99	10	Pass

802.11ax (HE20) RU106

Channel	Frequency (MHz)	EIRP PSD (dBm/MHz)	PSD Limit (dBm)	Test Result
1	2412	9.96	10	Pass
7	2442	9.93	10	Pass
13	2472	9.89	10	Pass


7.3 Adaptivity

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih
--------------	---------	---------------------------	--------------	------------	-----------

EUT Information		
Product	Model No.	Software/Firmware Version
RTL8851BE	RTL8851BE	6001.19.102.0

Companion Device Information			
Product	Brand	Model No.	Software/Firmware Version
Router	TP-LINK	WDR3310	3.13.15 Build 120327 Rel. 42225n


Detection Threshold Level	
For Bandwidth 20 MHz	The maximum EIRP is 19.98 dBm (99.54 mW) and antenna gain is 3 dBi. Detection Threshold level= $-70 \text{ dBm/MHz} + 10 \times \log(100 \text{ mW} / P_{\text{out}} (99.54 \text{ mW})) + G (3 \text{ dBi}) = -66.98 \text{ dBm/MHz}$ The interference signal level to the EUT is lower than -66.98 dBm/MHz at the antenna connector.
For Bandwidth 40 MHz	The maximum EIRP is 19.95 dBm (98.86 mW) and antenna gain is 3 dBi. Detection Threshold level= $-70 \text{ dBm/MHz} + 10 \times \log(100 \text{ mW} / P_{\text{out}} (98.86 \text{ mW})) + G (3 \text{ dBi}) = -66.95 \text{ dBm/MHz}$ The interference signal level to the EUT is lower than -66.95 dBm/MHz at the antenna connector.

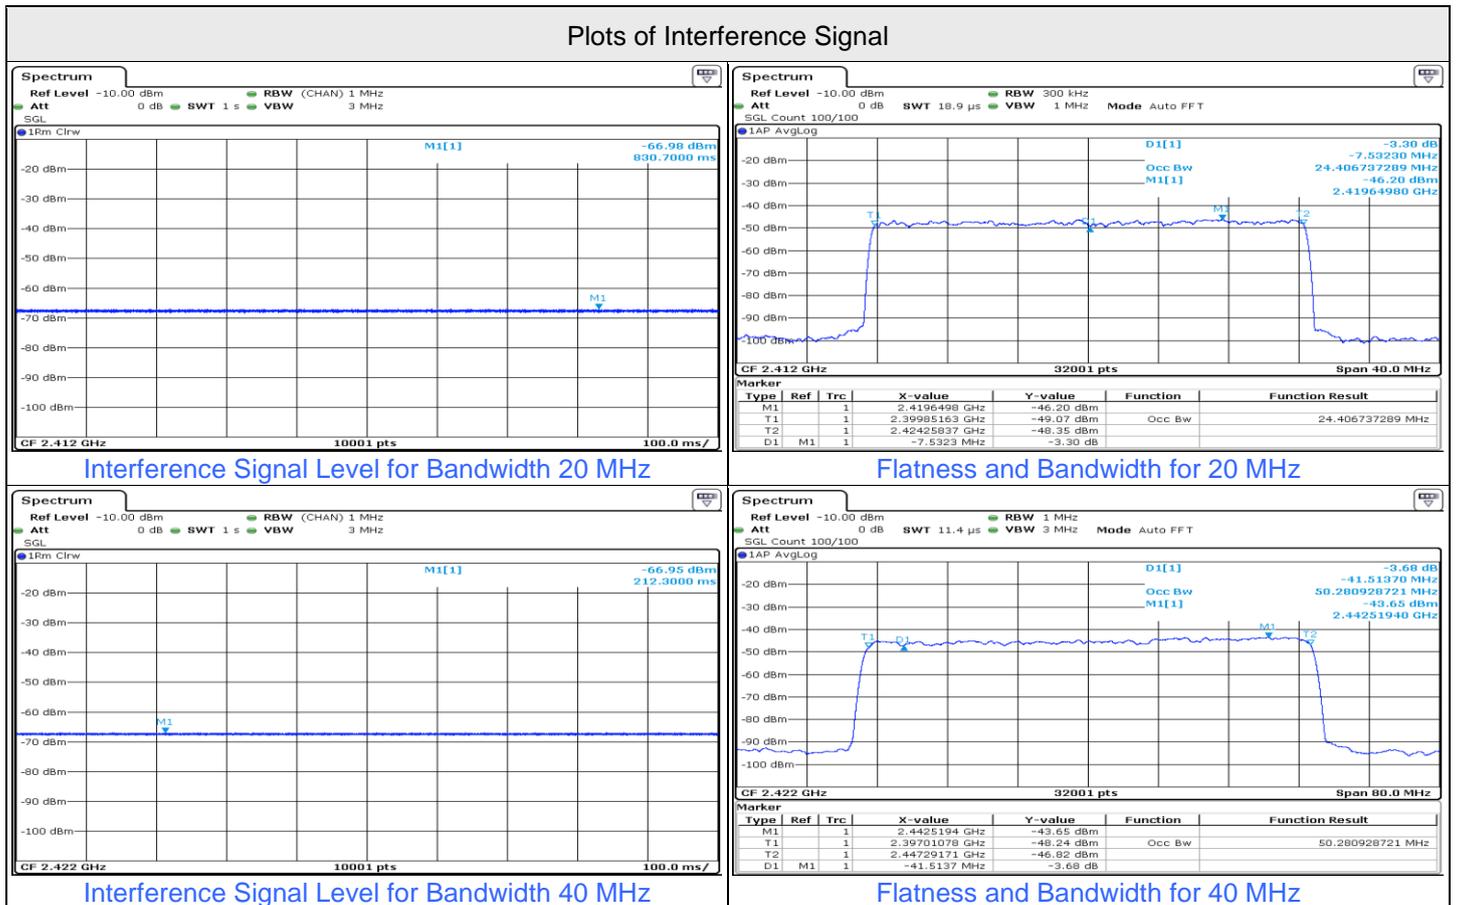


For Adaptivity

Operation Mode	Operating Frequency (Low Channel, MHz)	Operating Frequency (High Channel, MHz)	Test Result
802.11b	2412	2472	Pass
802.11g	2412	2472	Pass
802.11ax (HE20)	2412	2472	Pass
802.11ax (HE40)	2422	2462	Pass

Plots of Adaptivity

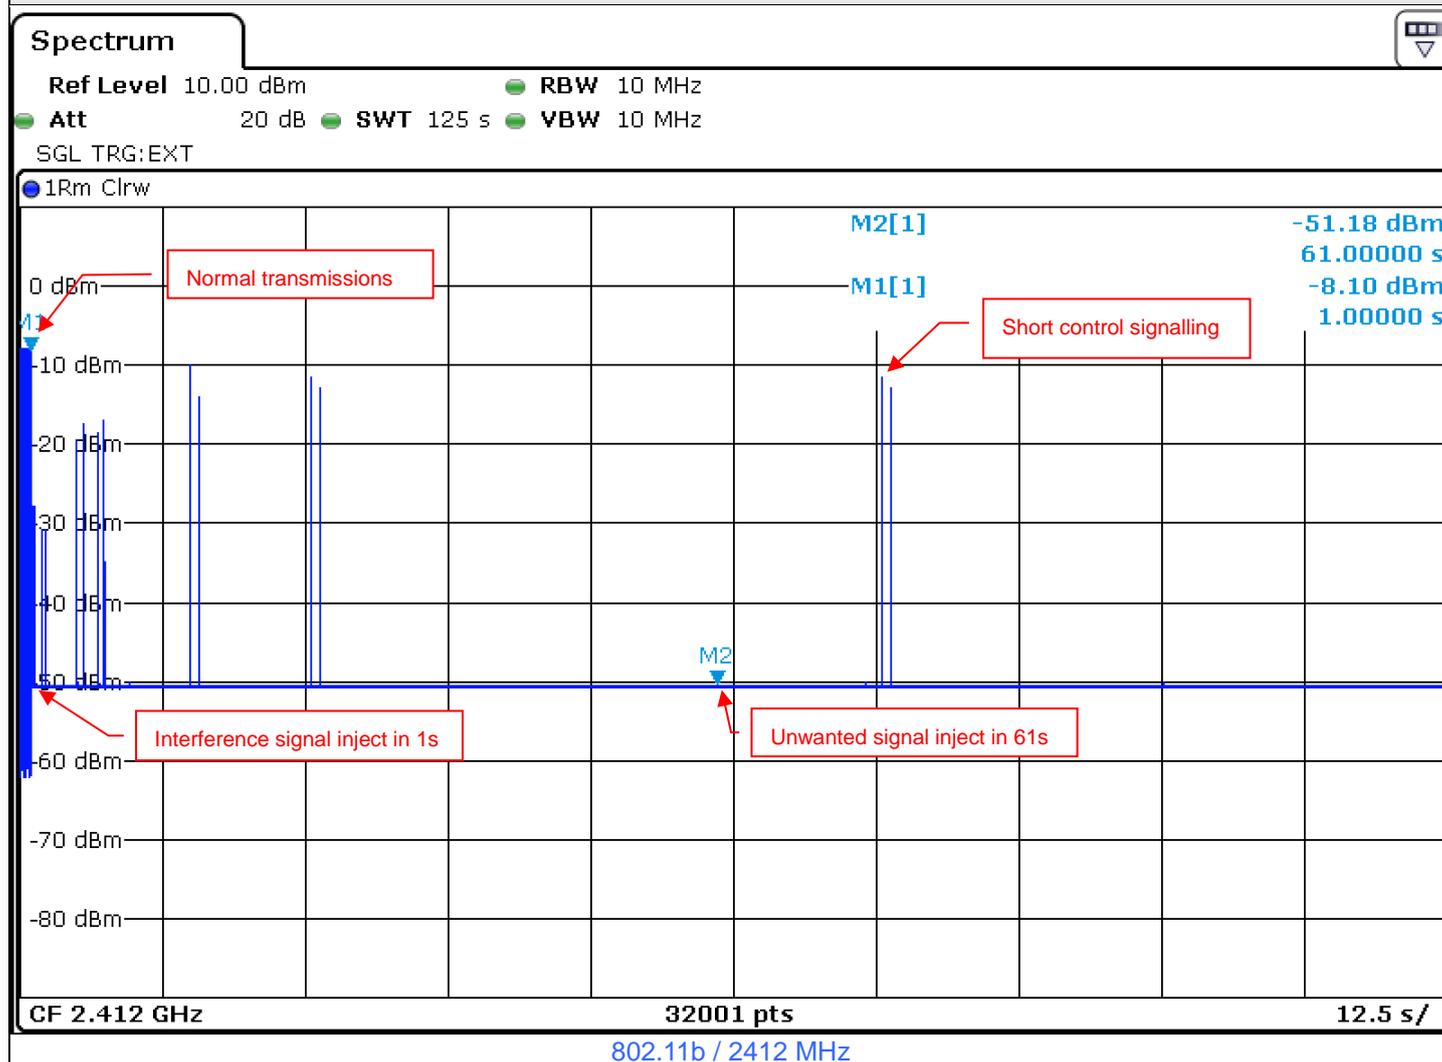

Plots of Adaptivity

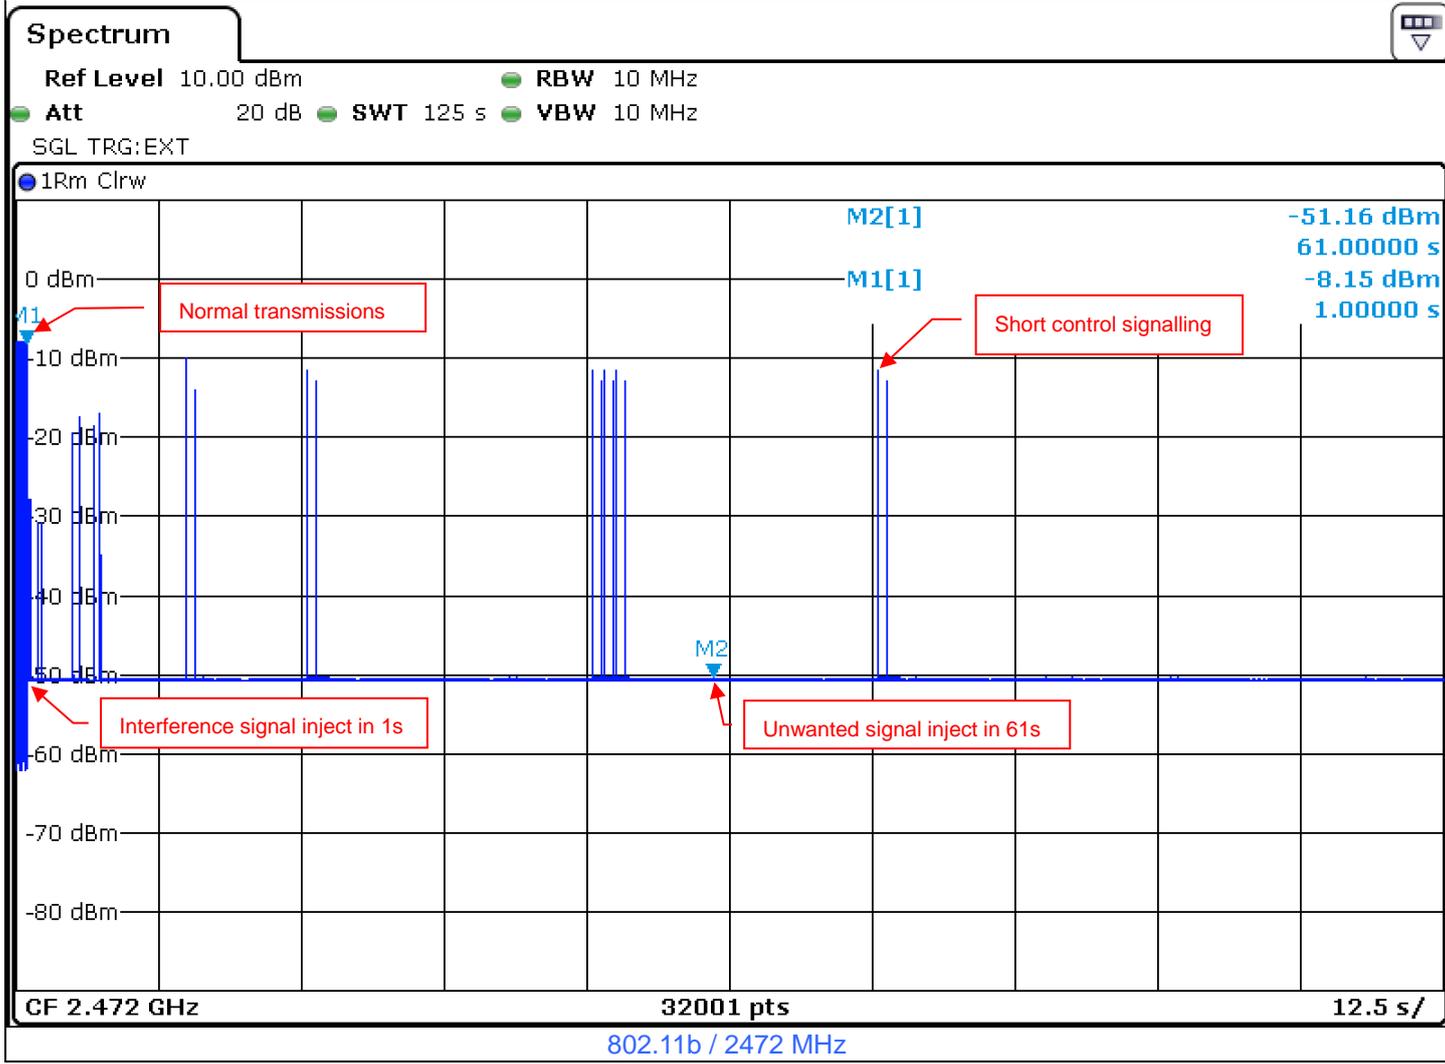


Plots of Adaptivity

Spectrum

Ref Level 10.00 dBm RBW 10 MHz
Att 20 dB SWT 125 s VBW 10 MHz

SGL TRG:EXT

1Rm Clrw

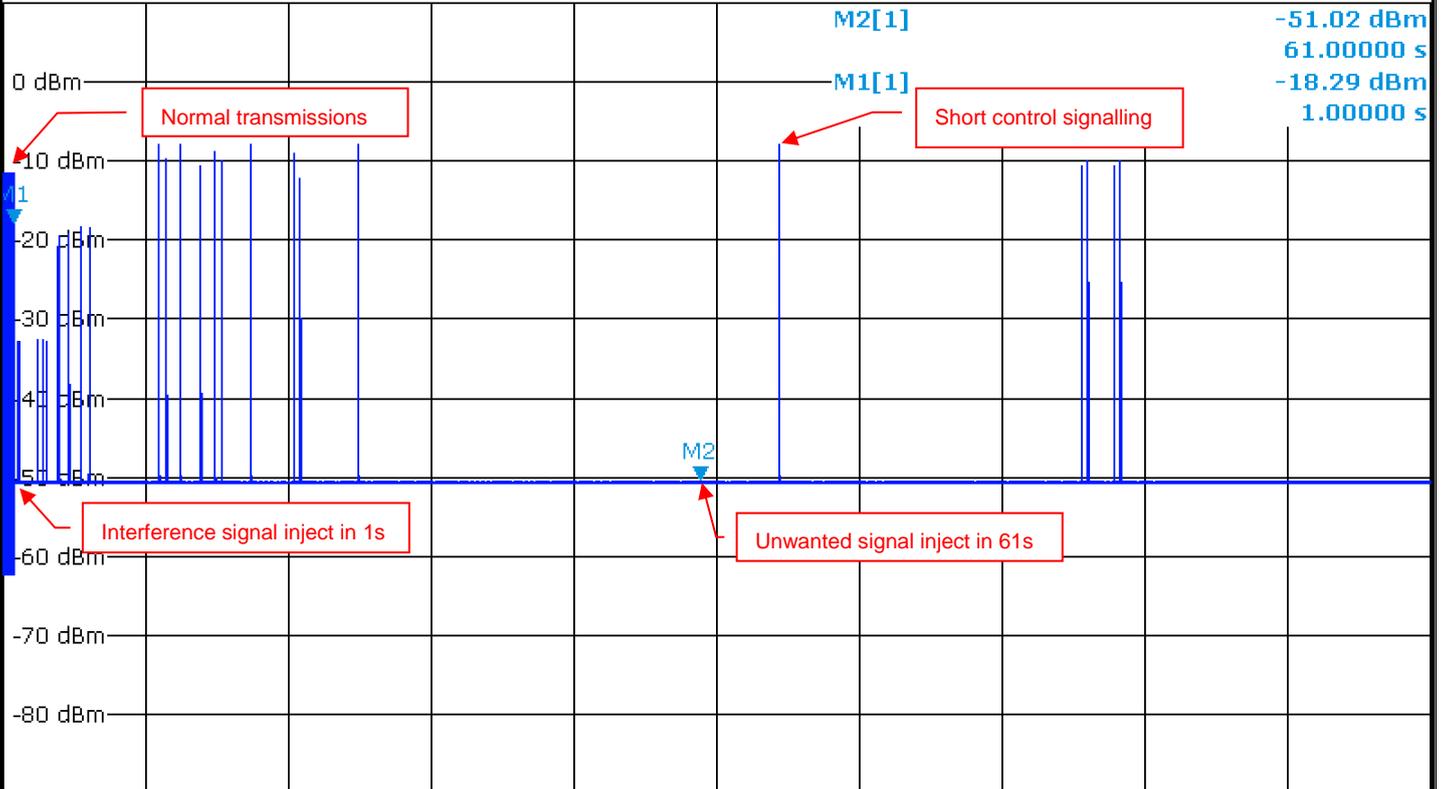

CF 2.412 GHz

32001 pts

12.5 s/

802.11g / 2412 MHz


Plots of Adaptivity

Spectrum

Ref Level 10.00 dBm RBW 10 MHz
Att 20 dB SWT 125 s VBW 10 MHz

SGL TRG:EXT

1Rm Clrw

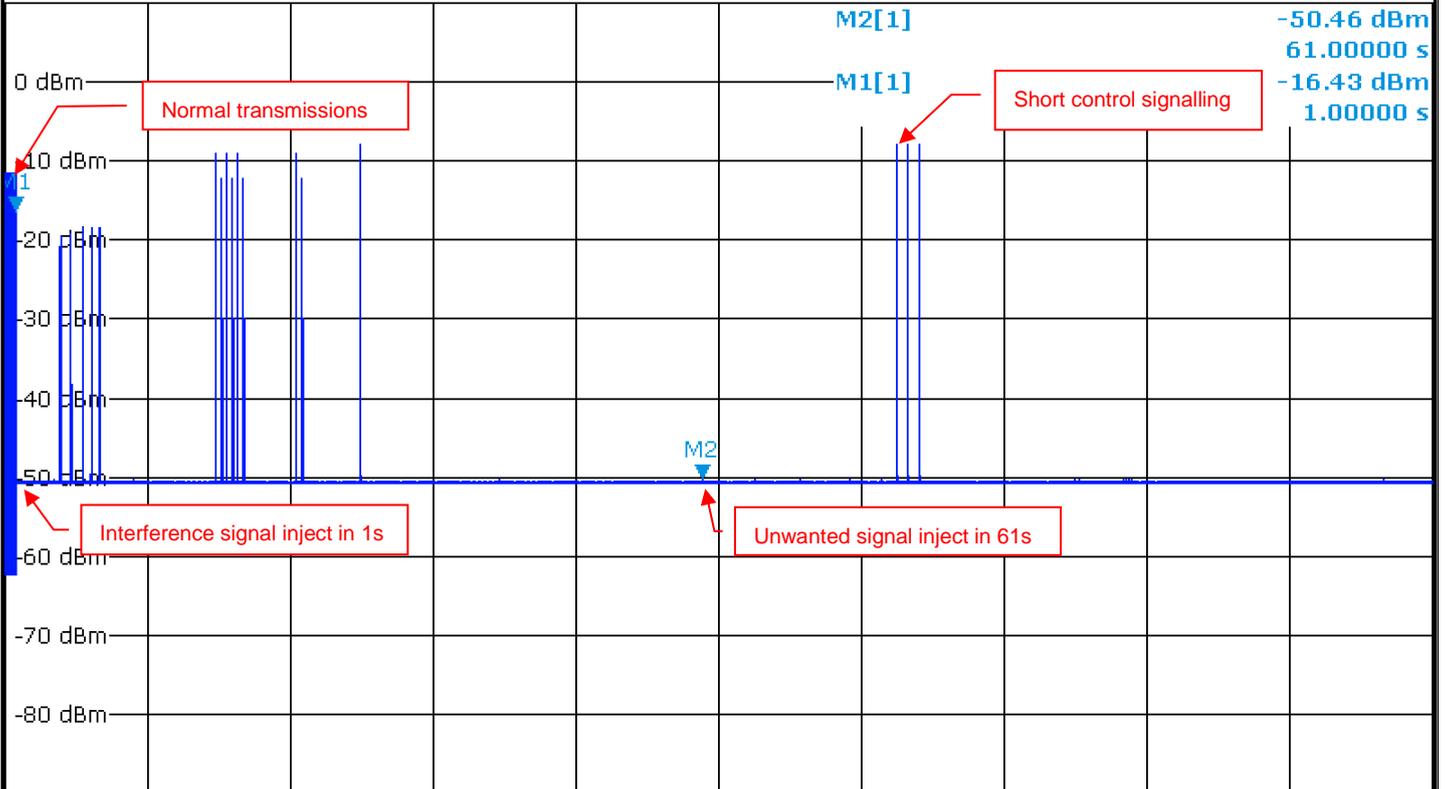

M2[1] -50.46 dBm
61.00000 s
M1[1] -16.43 dBm
1.00000 s


CF 2.472 GHz

32001 pts

12.5 s/

802.11g / 2472 MHz

Plots of Adaptivity

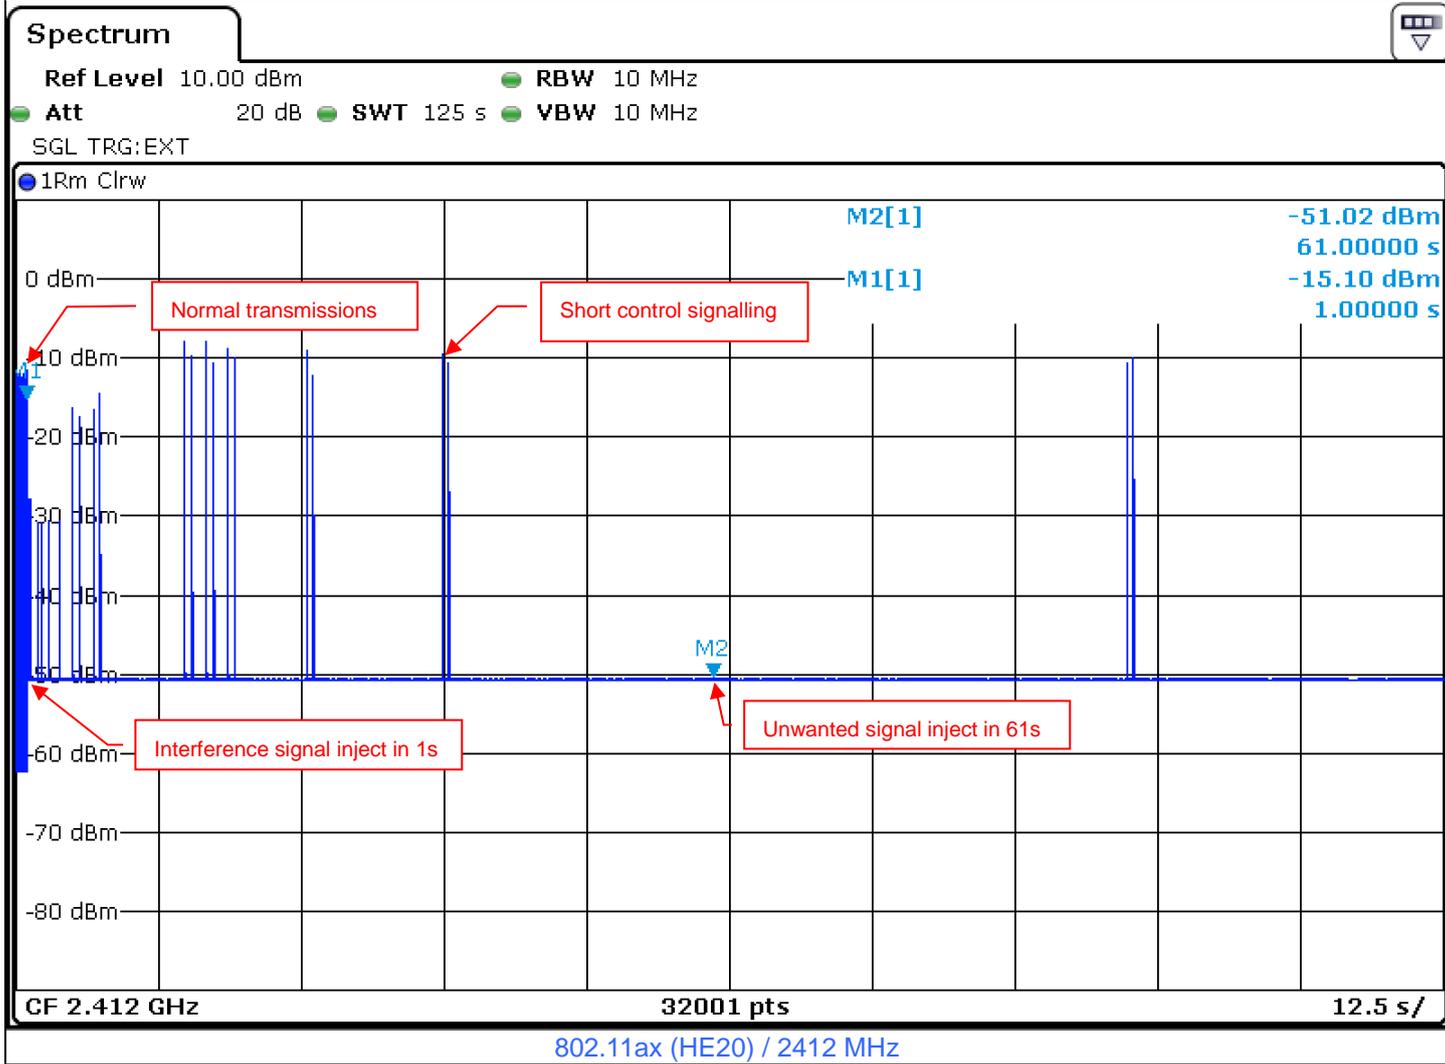


Plots of Adaptivity

Spectrum

Ref Level 10.00 dBm RBW 10 MHz
Att 20 dB SWT 125 s VBW 10 MHz

SGL TRG:EXT

1Rm Clrw

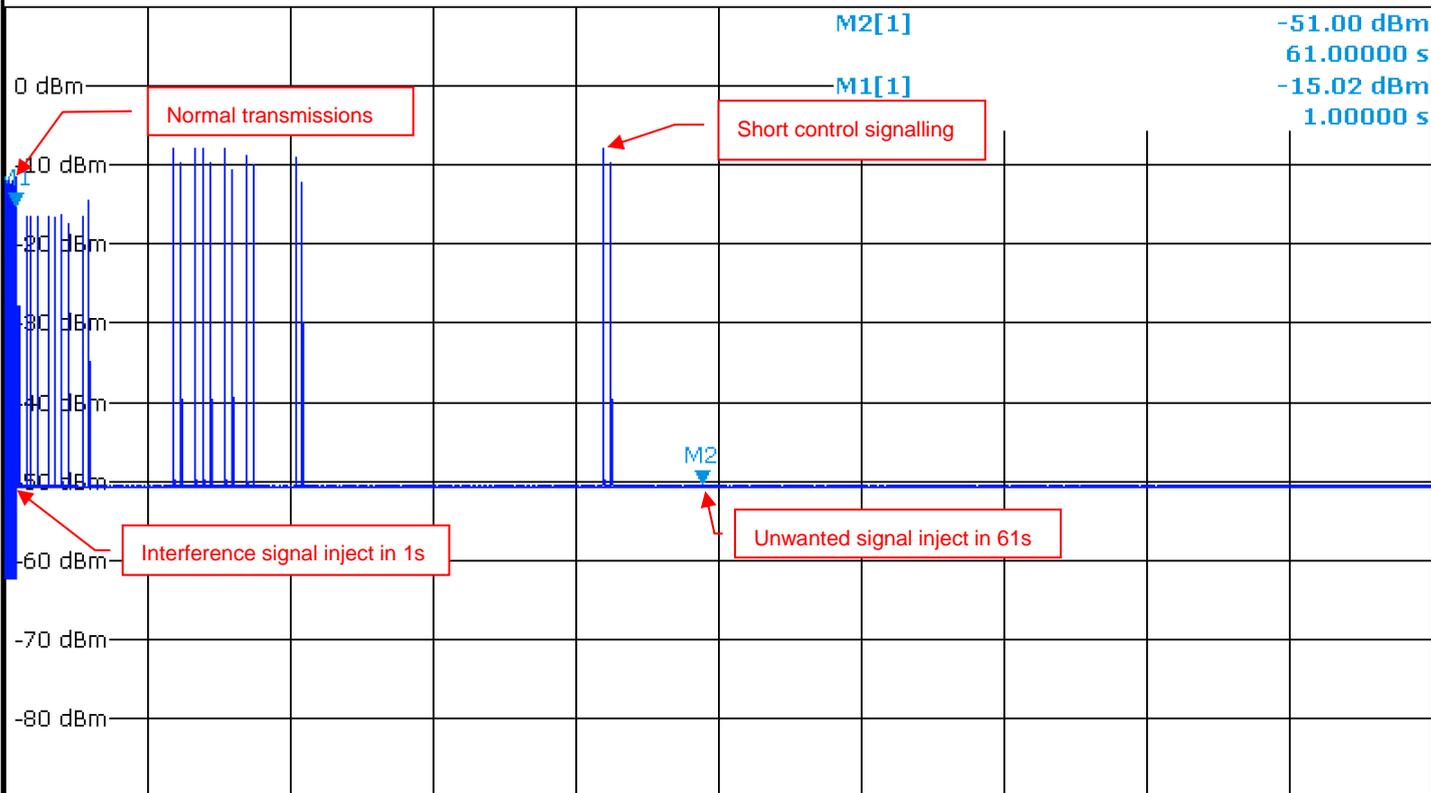

CF 2.472 GHz

32001 pts

12.5 s/

802.11ax (HE20) / 2472 MHz


Plots of Adaptivity

Spectrum

Ref Level 10.00 dBm RBW 10 MHz
Att 20 dB SWT 125 s VBW 10 MHz

SGL TRG:EXT

1Rm Clrw

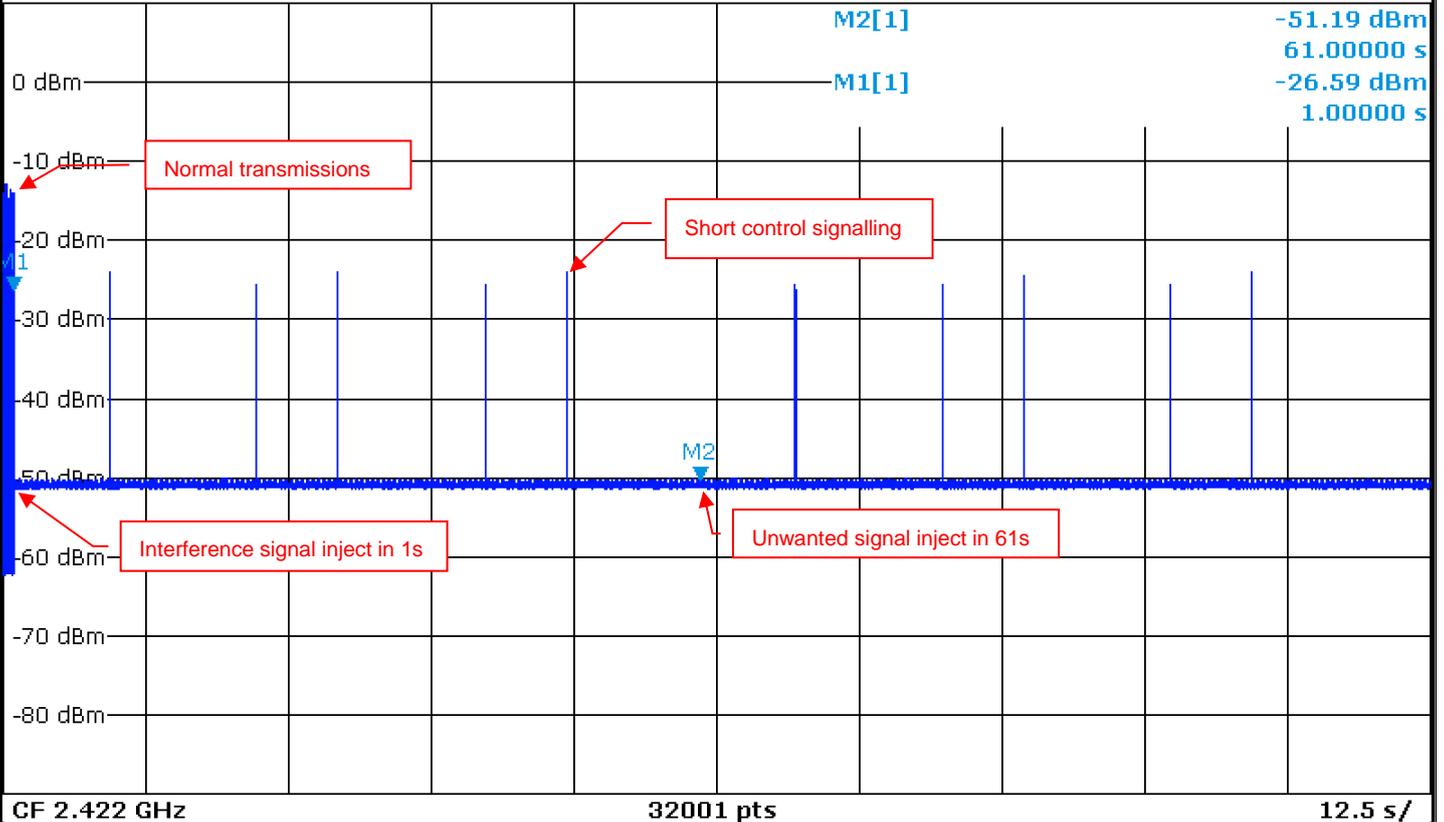


802.11ax (HE40) / 2422 MHz

Plots of Adaptivity

Spectrum

Ref Level 10.00 dBm RBW 10 MHz
Att 20 dB SWT 125 s VBW 10 MHz
SGL TRG:EXT

1Rm Clrw

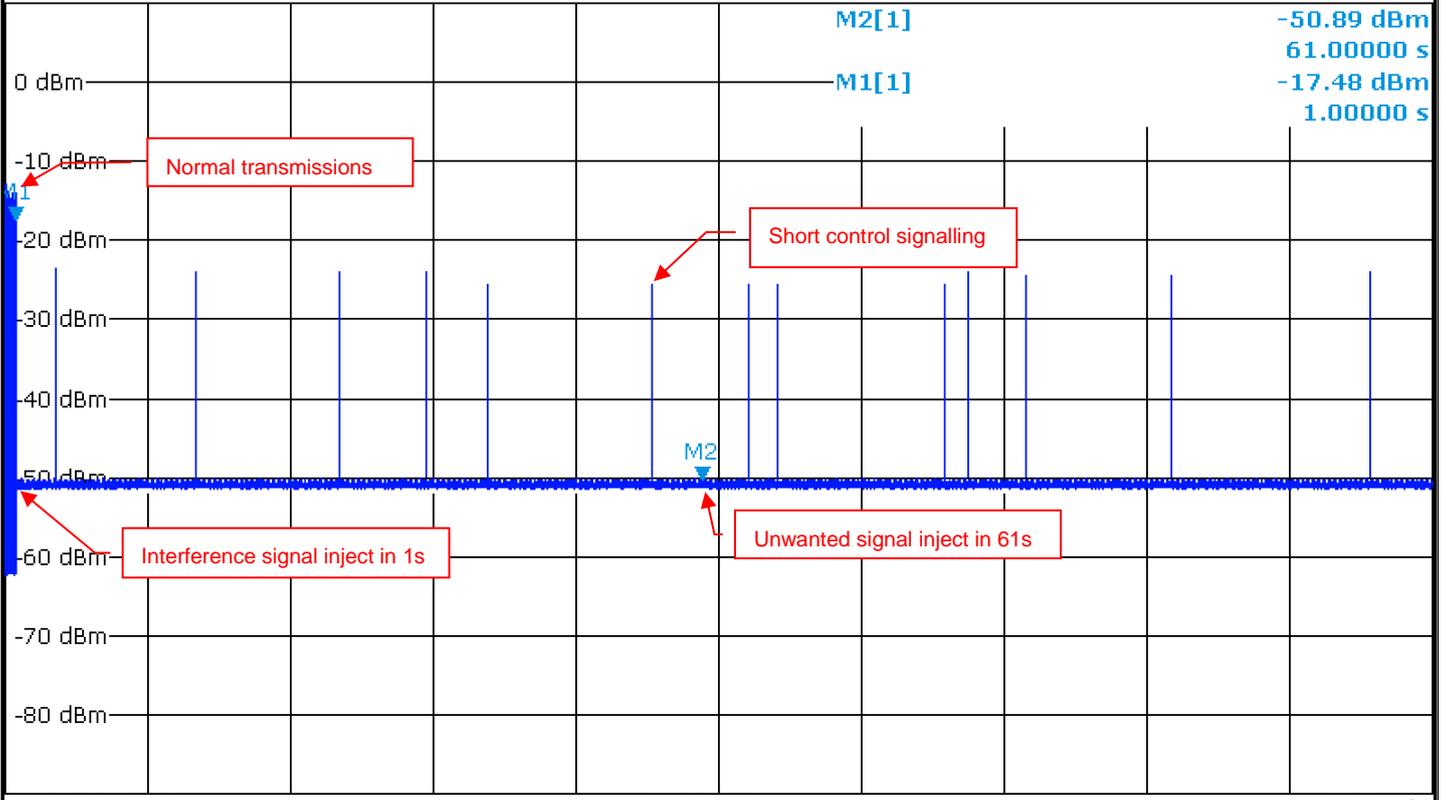

CF 2.462 GHz

32001 pts


12.5 s/

802.11ax (HE40) / 2462 MHz

For Channel Occupancy Time and Idle Period

Operation Mode	Operating Frequency (MHz)	The Channel Occupancy Time (ms)		Minimum Idle Period (us)		Test Result
		Value	Limit	Value	Limit	
802.11b	2412	1.31	13	18.19	18	Pass
802.11g	2412	0.71	13	18.53	18	Pass
802.11ax (HE20)	2412	1.26	13	63.27	18	Pass
802.11ax (HE40)	2422	0.45	13	61.92	18	Pass

Plots of Channel Occupancy Time and Idle Period

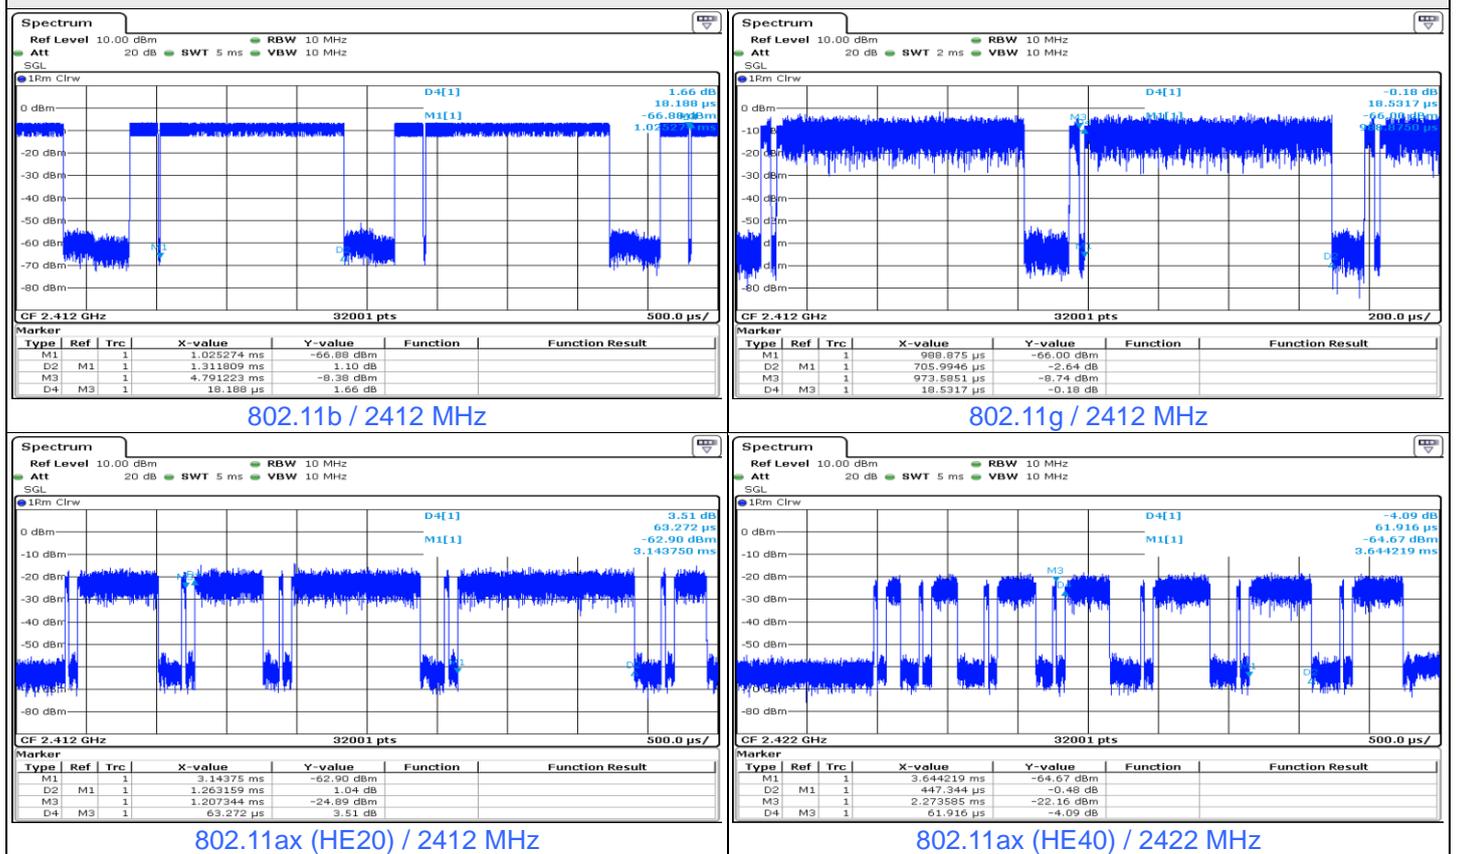


For Short Control Signalling Transmission

Operation Mode	Operating Frequency (MHz)	SCST Total On Time (ms)	SCST Limit (ms)	Test Result
802.11b	2412	1.52	5	Pass
	2472	1.52	5	Pass
802.11g	2412	1.47	5	Pass
	2472	2.1	5	Pass
802.11ax (HE20)	2412	0.45	5	Pass
	2472	0.59	5	Pass
802.11ax (HE40)	2422	3.84	5	Pass
	2462	3.12	5	Pass


Plots of Short Control Signalling Transmission

Duty Cycle

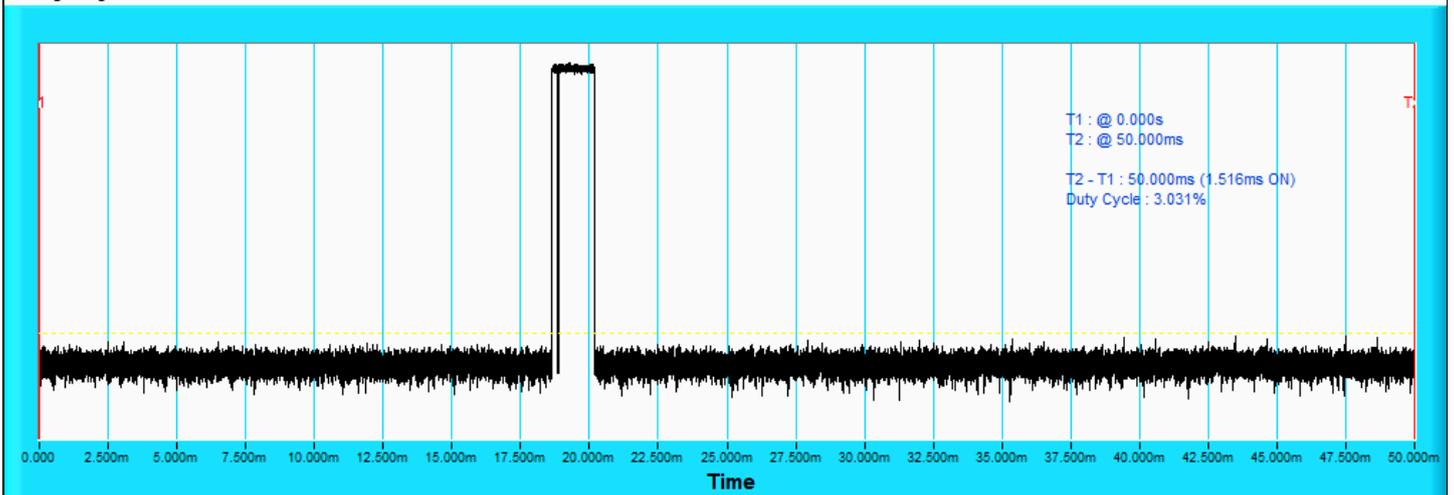

802.11b / 2412 MHz


Duty Cycle

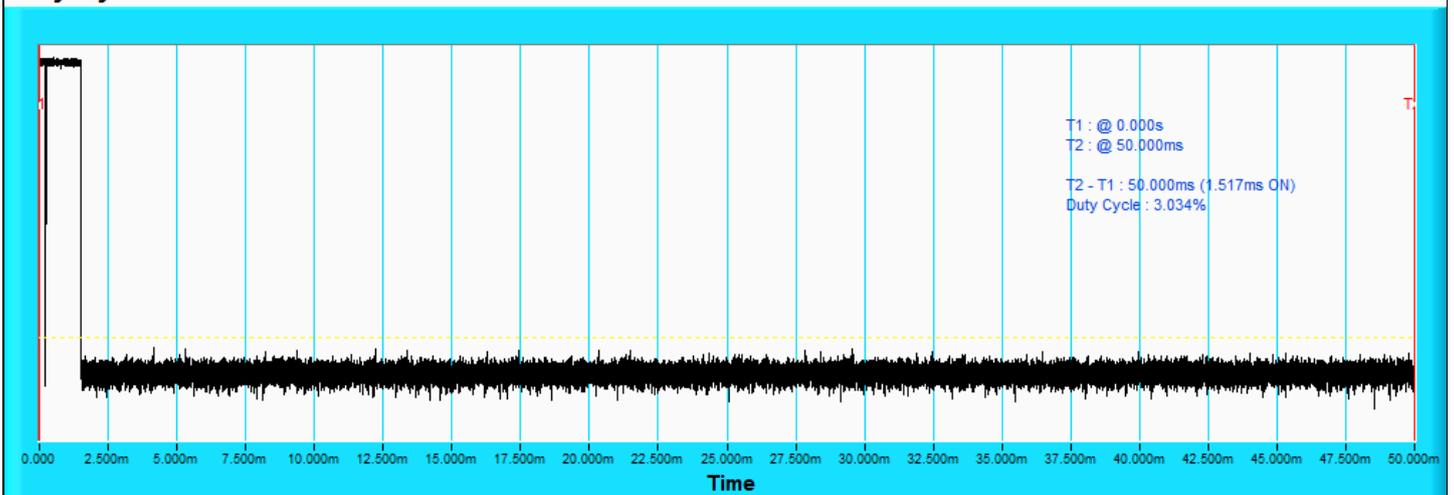

802.11b / 2472 MHz


Plots of Short Control Signalling Transmission

Duty Cycle

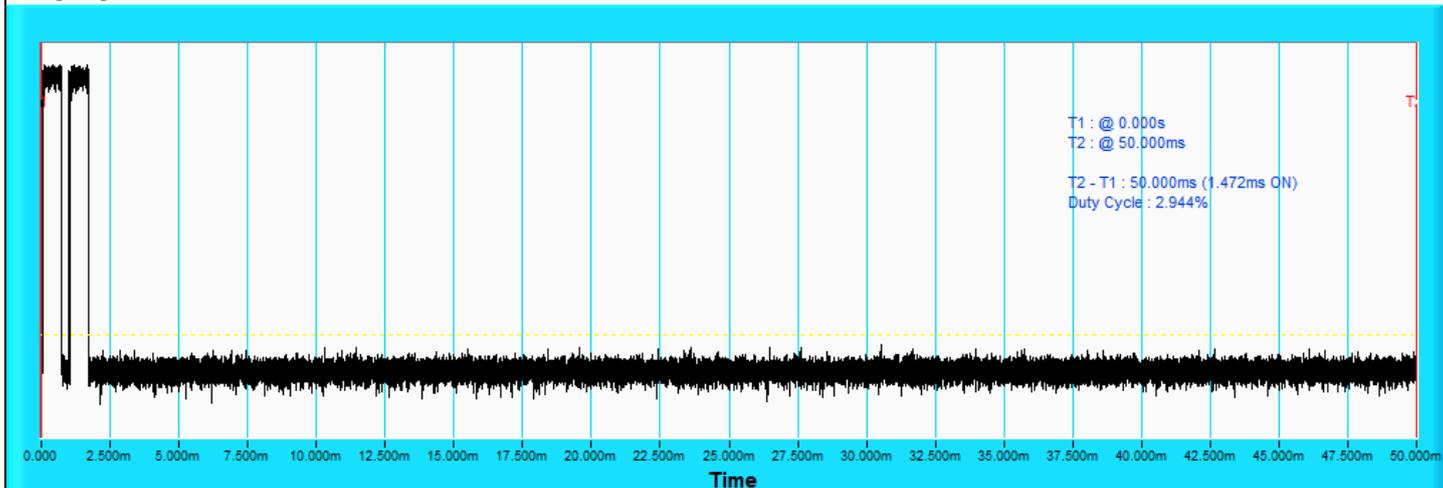


802.11g / 2412 MHz

Duty Cycle

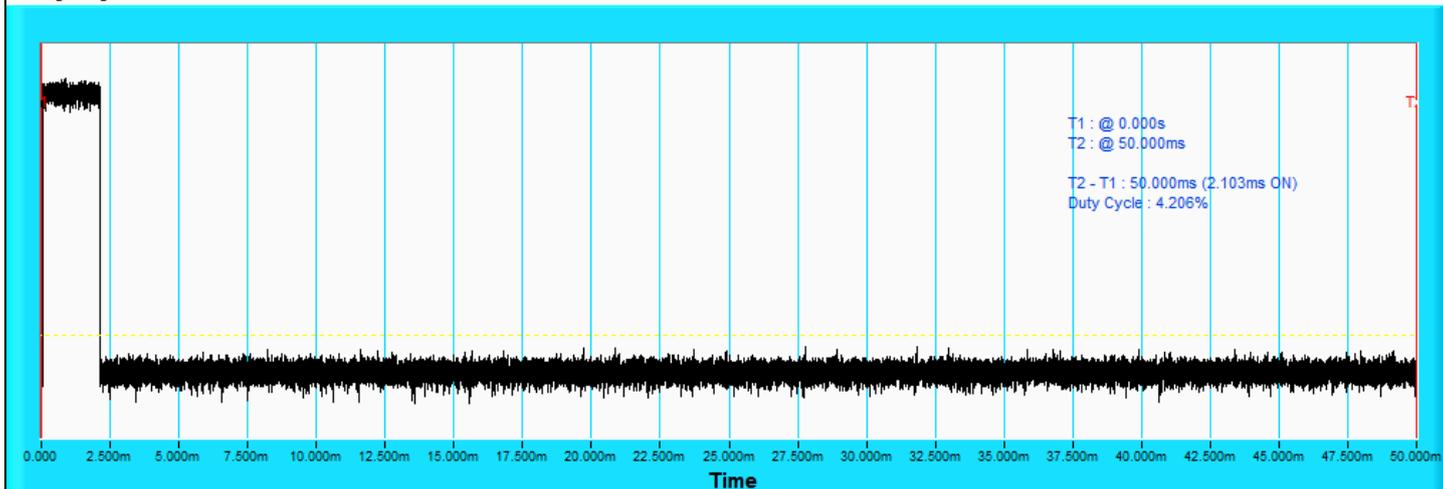

802.11g / 2472 MHz


Duty Cycle

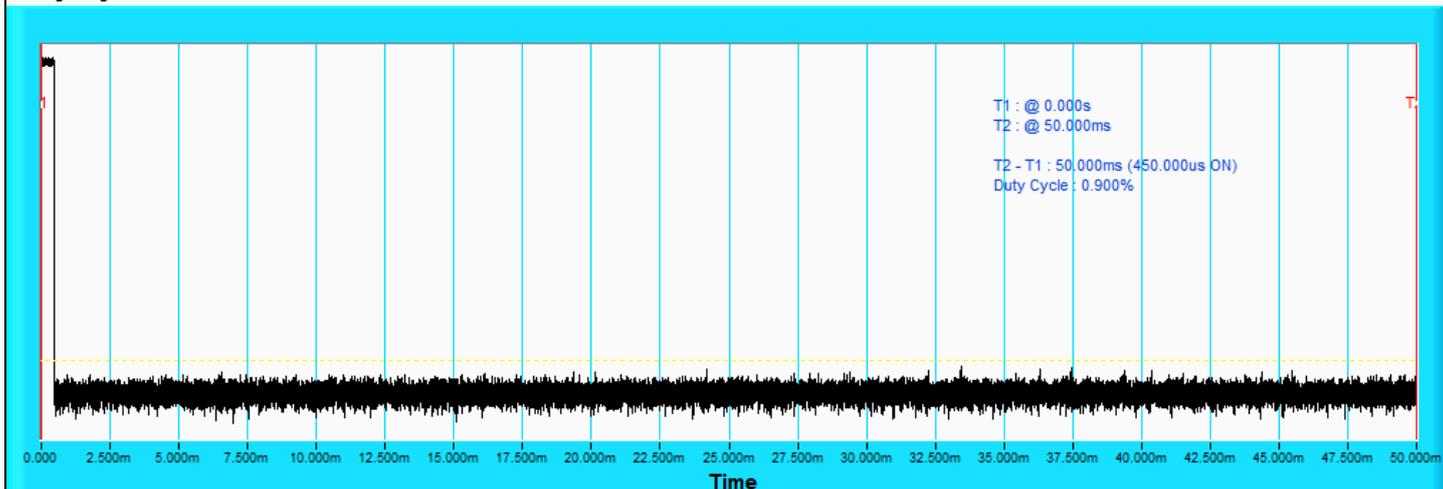

802.11ax (HE20) / 2412 MHz


Plots of Short Control Signalling Transmission

Duty Cycle

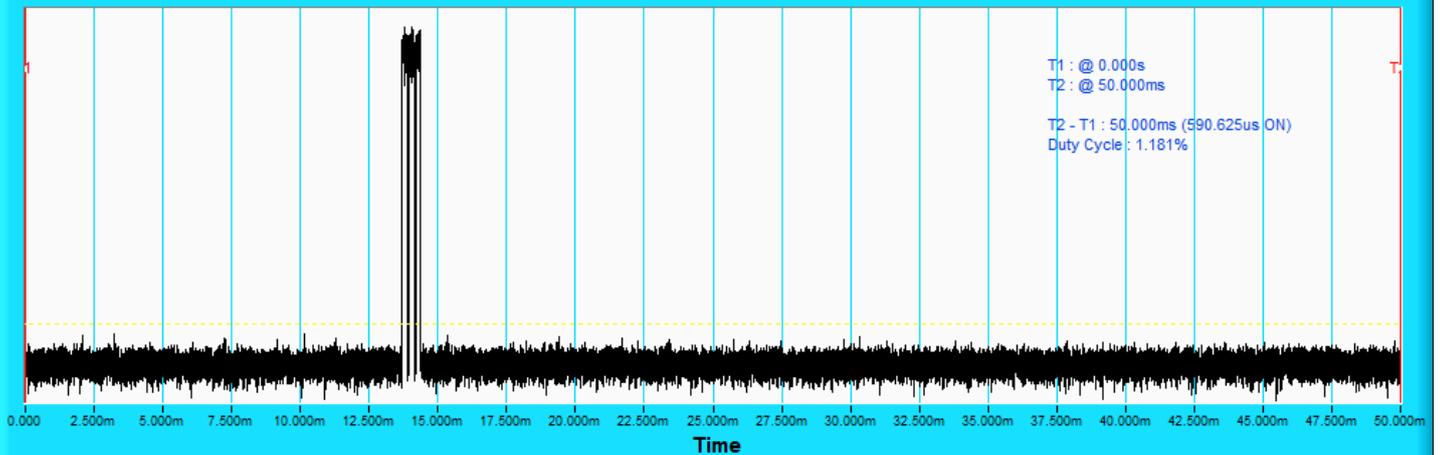


802.11ax (HE20) / 2472 MHz

Duty Cycle

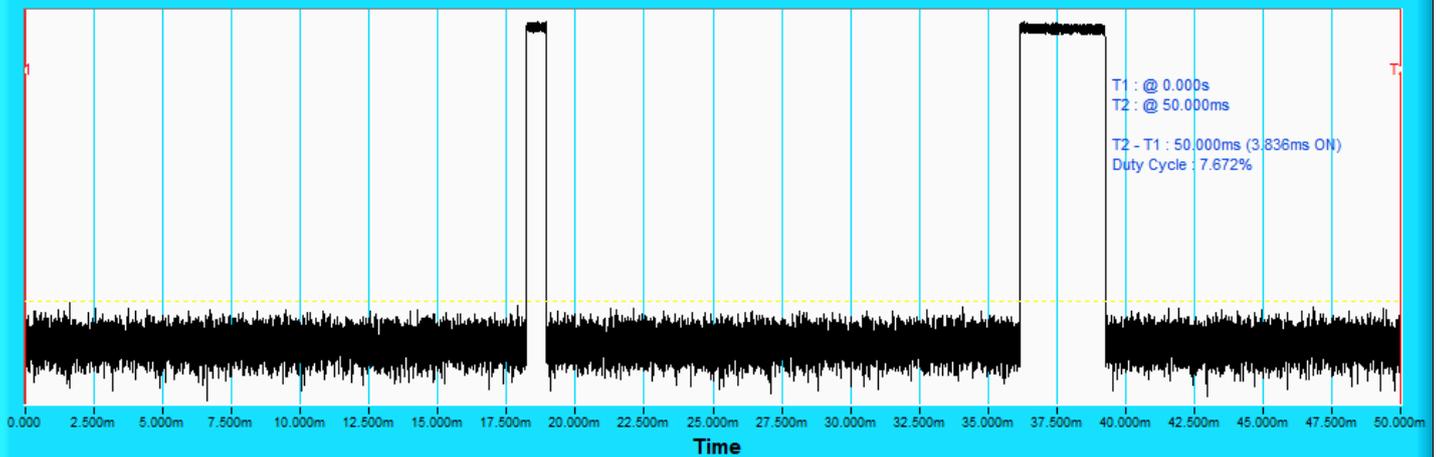

802.11ax (HE40) / 2422 MHz

Duty Cycle

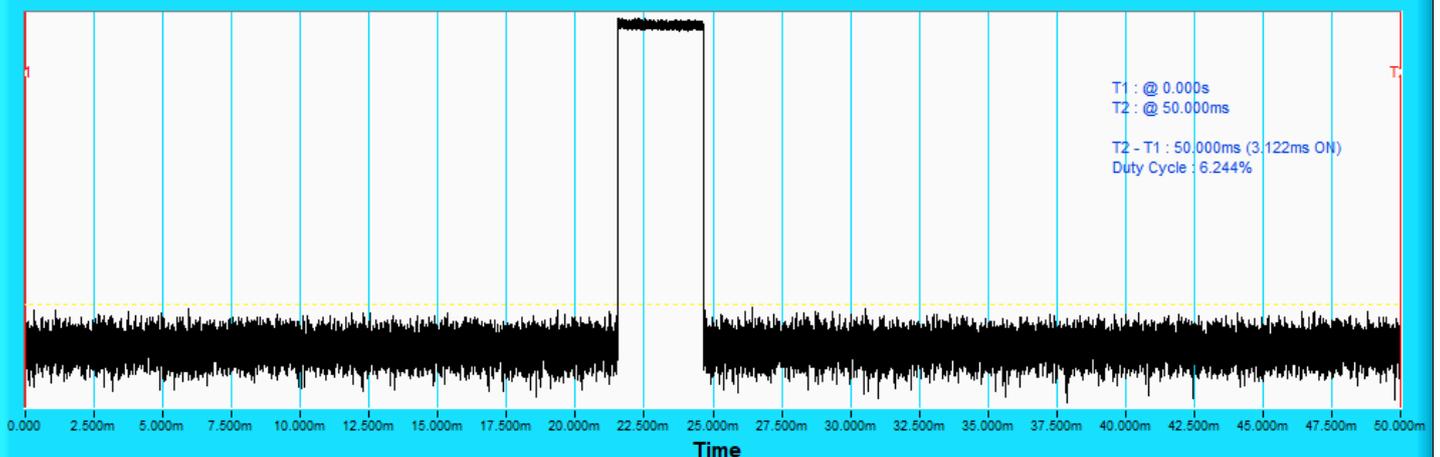

802.11ax (HE40) / 2462 MHz

For Unwanted Signal Interference

Operation Mode	Operating Frequency (MHz)	Wanted Signal Mean Power From Companion Device (dBm)	Unwanted Signal Frequency (MHz)	Unwanted CW Signal Power (dBm)	Test Result
802.11b	2412	-50	2488.5	-31.6	Pass
	2472	-50	2395	-31.6	Pass
802.11g	2412	-50	2488.5	-31.6	Pass
	2472	-50	2395	-31.6	Pass
802.11ax (HE20)	2412	-50	2488.5	-31.6	Pass
	2472	-50	2395	-31.6	Pass
802.11ax (HE40)	2422	-50	2488.5	-31.6	Pass
	2462	-50	2395	-31.6	Pass

Note: In conducted measurements, the unwanted signal power level has to be corrected for the (in-band) antenna assembly gain (G) at the antenna connector. The antenna gain is 3.4 dBi.



Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Stan Shih
--------------	---------	---------------------------	--------------	------------	-----------


Add Test low antenna gain
 Test Results for reference by client's requirement.

EUT Information		
Product	Model No.	Software/Firmware Version
RTL8851BE	RTL8851BE	6001.19.102.0


Companion Device Information			
Product	Brand	Model No.	Software/Firmware Version
Router	TP-LINK	WDR3310	3.13.15 Build 120327 Rel. 42225n

Detection Threshold Level	
For Bandwidth 20 MHz	The maximum EIRP is 19.98 dBm (99.54 mW) and antenna gain is -2 dBi. Detection Threshold level= -70 dBm/MHz + 10xlog(100 mW / Pout (99.54 mW)) + G (-2 dBi) = -71.98 dBm/MHz The interference signal level to the EUT is lower than -71.98 dBm/MHz at the antenna connector.
For Bandwidth 40 MHz	The maximum EIRP is 19.95 dBm (98.86 mW) and antenna gain is -2 dBi. Detection Threshold level= -70 dBm/MHz + 10xlog(100 mW / Pout (98.86 mW)) + G (-2 dBi) = -71.95 dBm/MHz The interference signal level to the EUT is lower than -71.95 dBm/MHz at the antenna connector.


Plots of Interference Signal

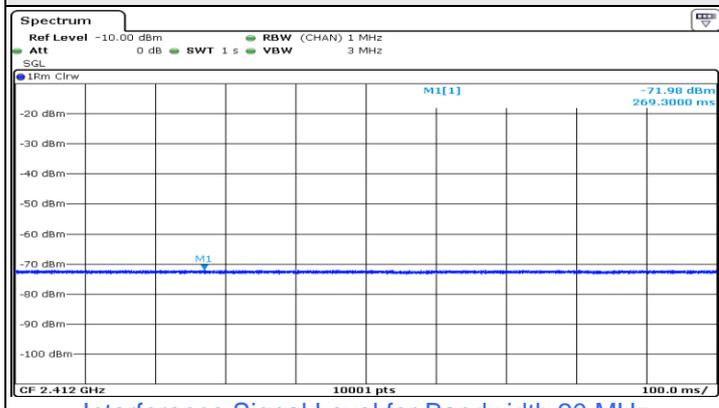


Interference Signal Level for Bandwidth 20 MHz

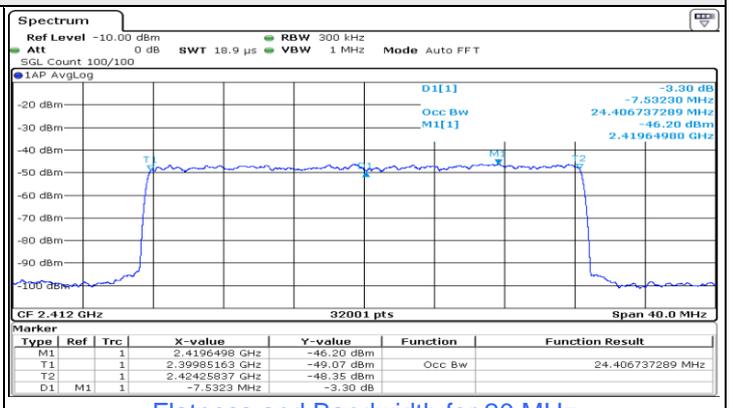

Flatness and Bandwidth for 20 MHz

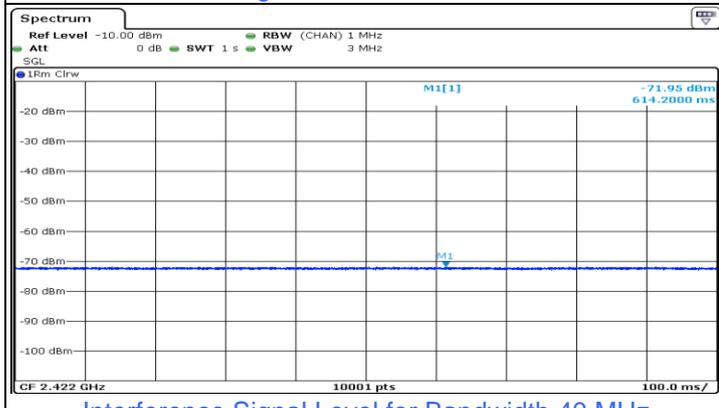

Interference Signal Level for Bandwidth 40 MHz

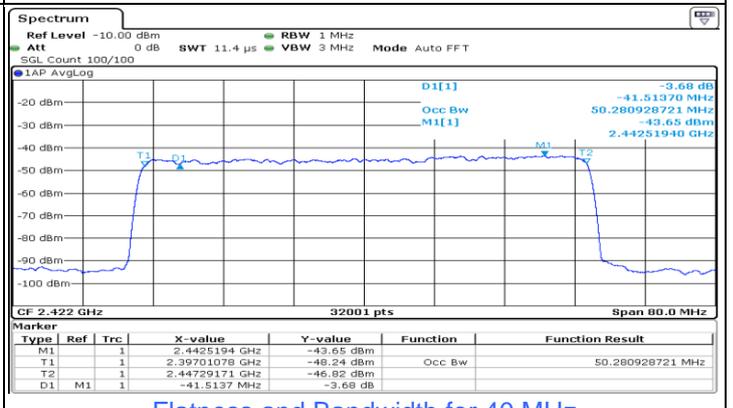


Flatness and Bandwidth for 40 MHz

For Adaptivity

Operation Mode	Operating Frequency (Low Channel, MHz)	Operating Frequency (High Channel, MHz)	Test Result
802.11b	2412	2472	Pass
802.11g	2412	2472	Pass
802.11ax (HE20)	2412	2472	Pass
802.11ax (HE40)	2422	2462	Pass

Plots of Adaptivity

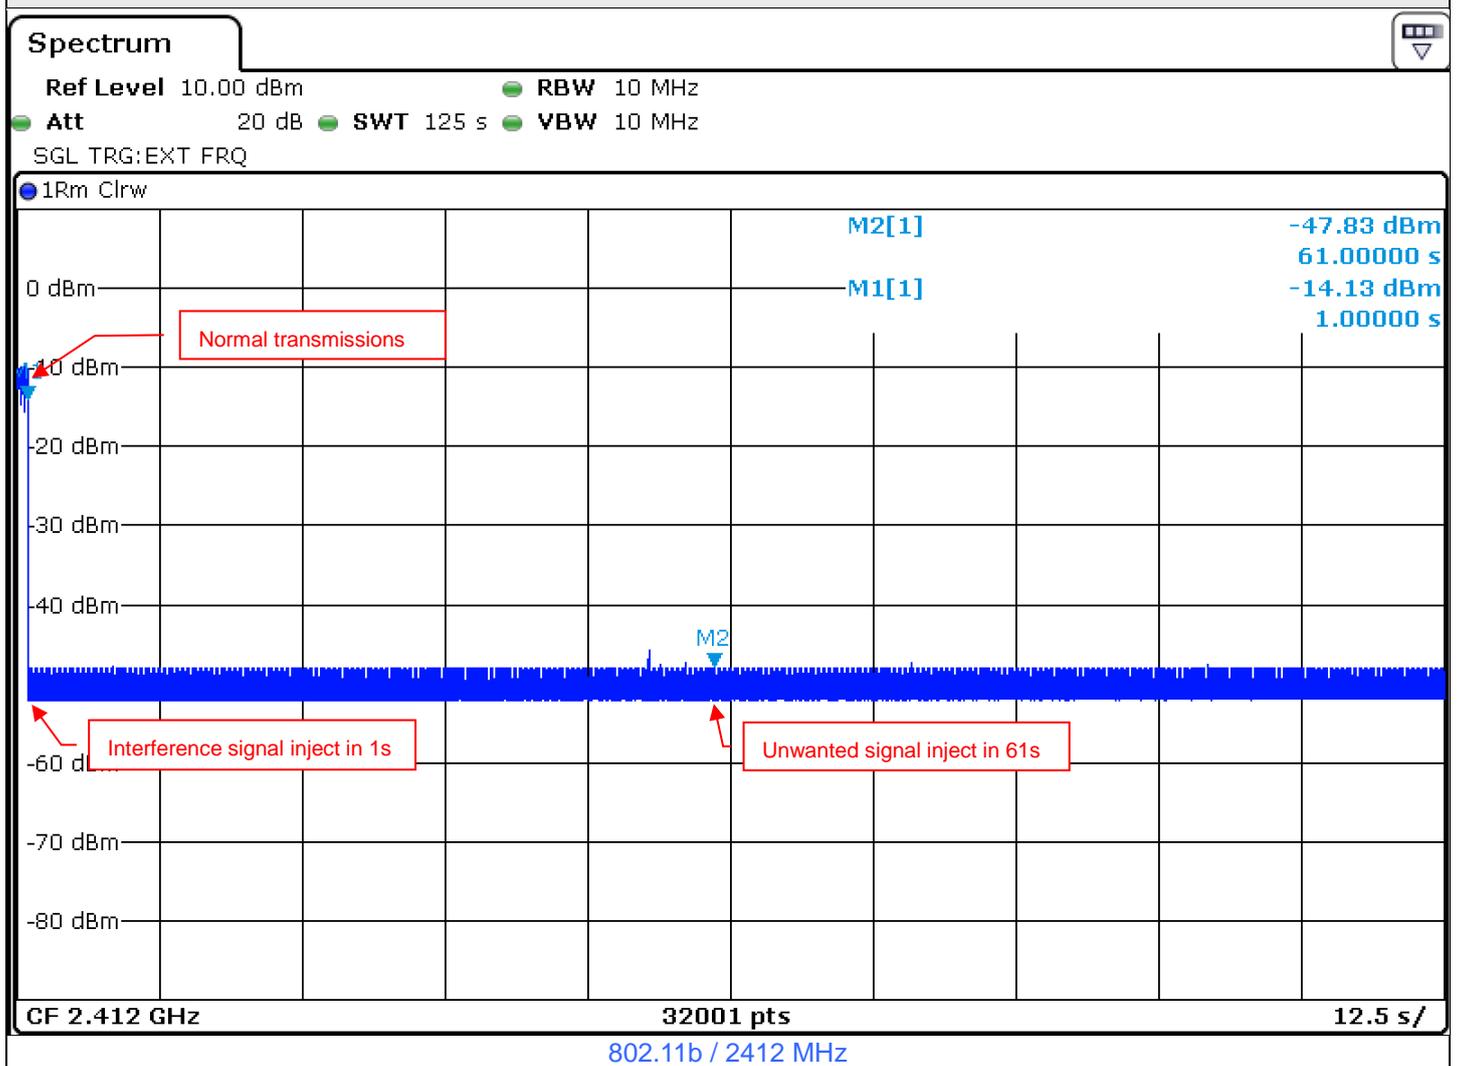




Plots of Adaptivity

Spectrum

Ref Level 10.00 dBm RBW 10 MHz
Att 20 dB SWT 125 s VBW 10 MHz
SGL TRG:EXT FRQ

1Rm Clrw

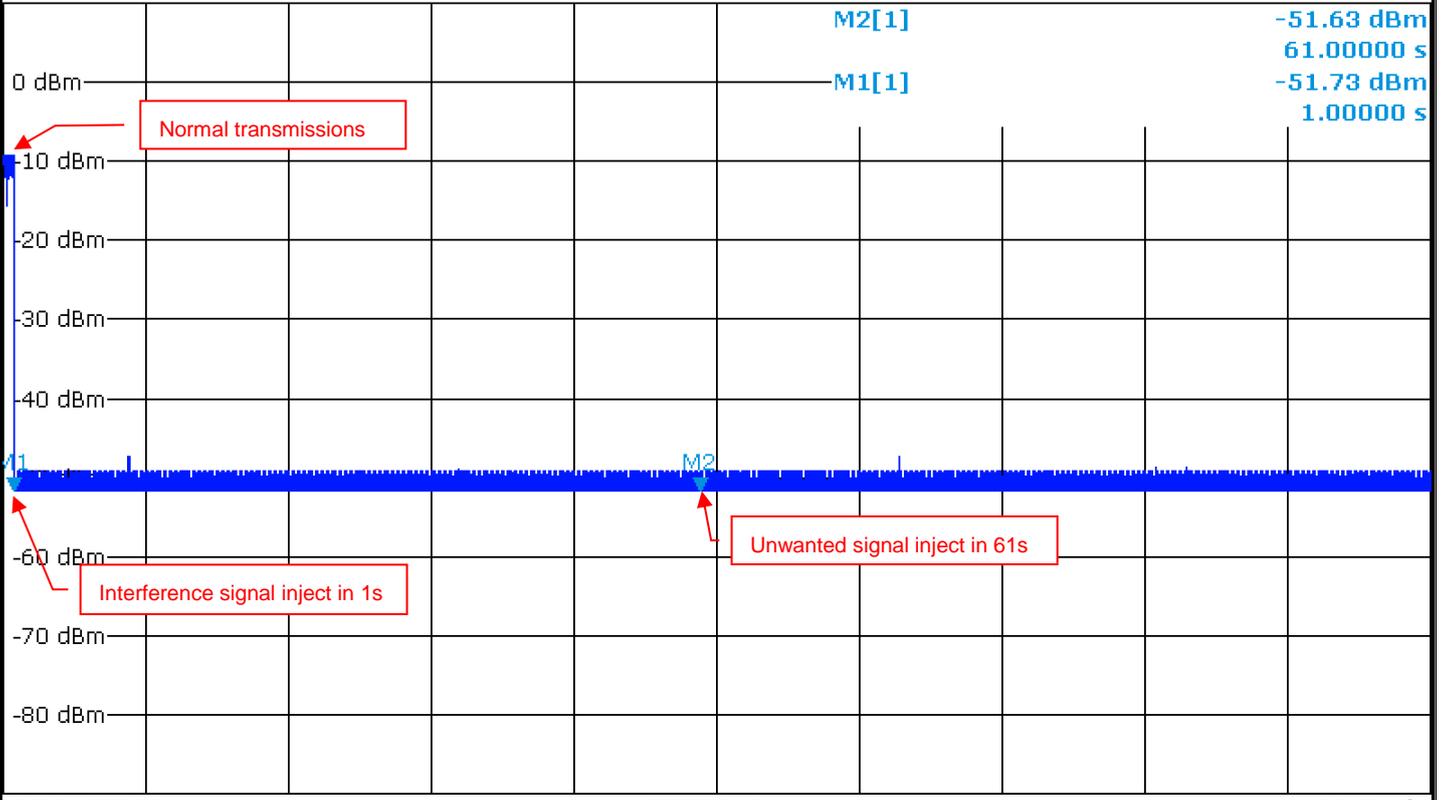

CF 2.472 GHz

32001 pts

12.5 s/

802.11b / 2472 MHz


Plots of Adaptivity

Spectrum

Ref Level 10.00 dBm RBW 10 MHz
Att 20 dB SWT 125 s VBW 10 MHz

SGL TRG:EXT

1Rm Clrw

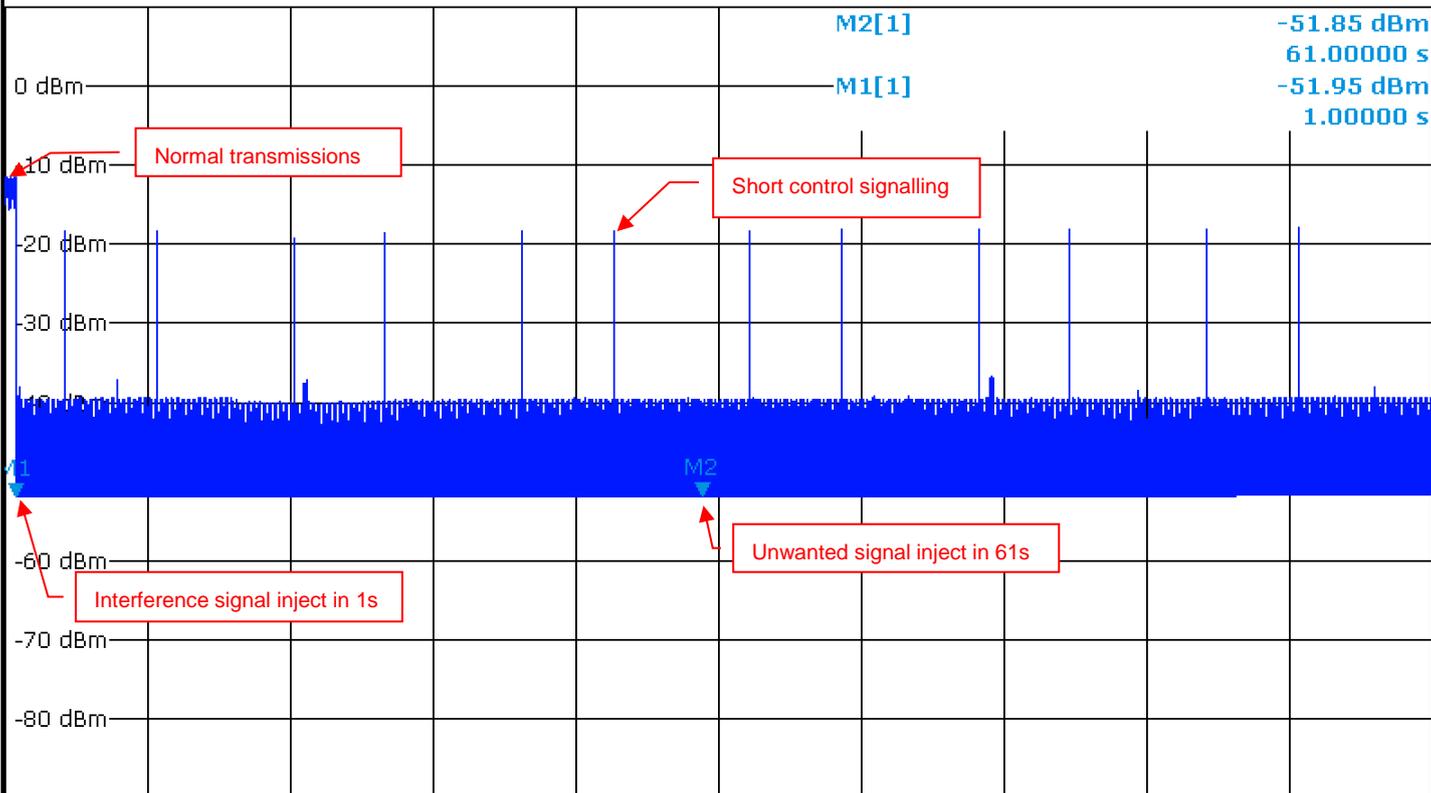

CF 2.412 GHz

32001 pts

12.5 s/

802.11g / 2412 MHz


Plots of Adaptivity

Spectrum

Ref Level 10.00 dBm RBW 10 MHz
Att 20 dB SWT 125 s VBW 10 MHz

SGL TRG:EXT

1Rm Clrw

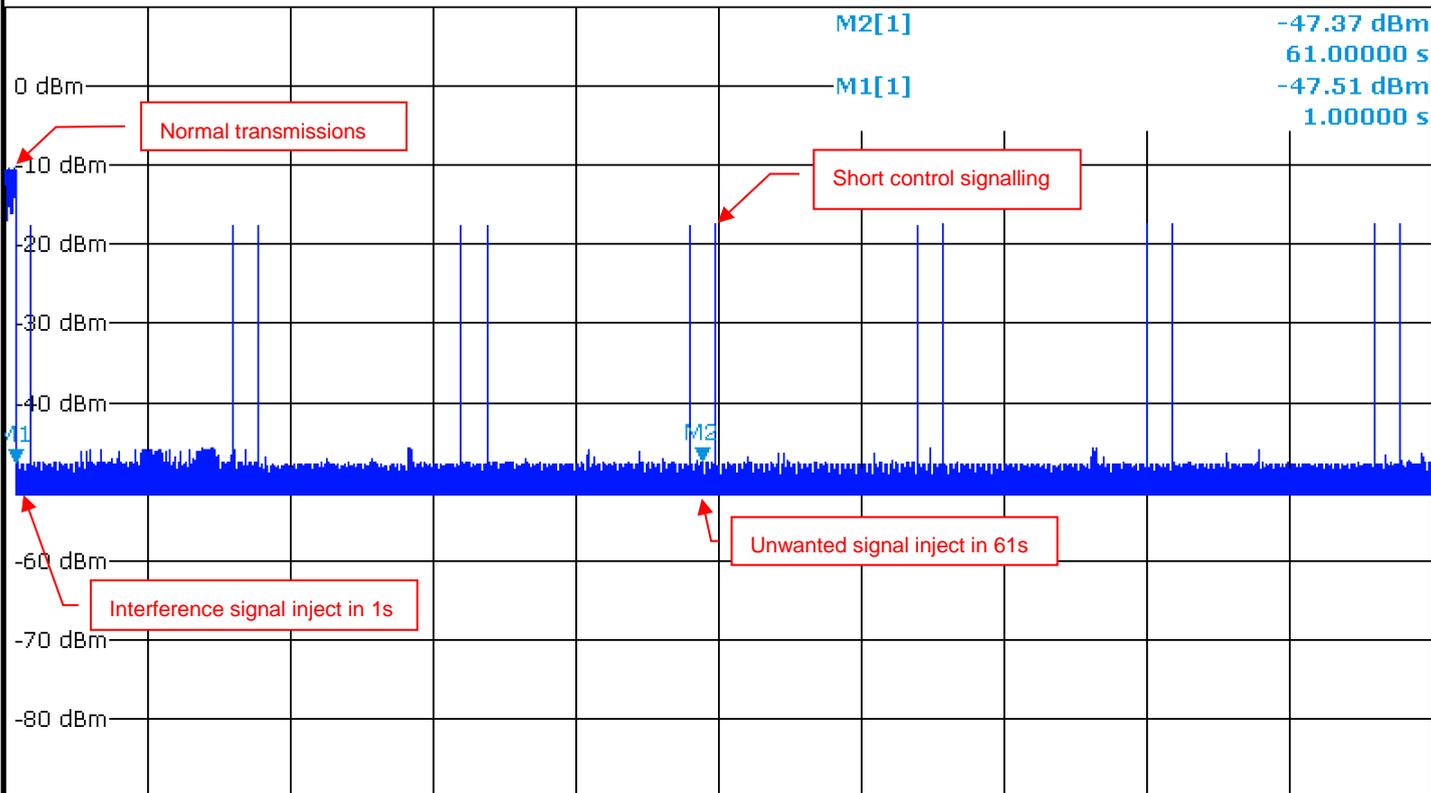

CF 2.462 GHz

32001 pts

12.5 s/

802.11g / 2472 MHz


Plots of Adaptivity

Spectrum

Ref Level 10.00 dBm RBW 10 MHz
Att 20 dB SWT 125 s VBW 10 MHz

SGL TRG:EXT

1Rm Clrw

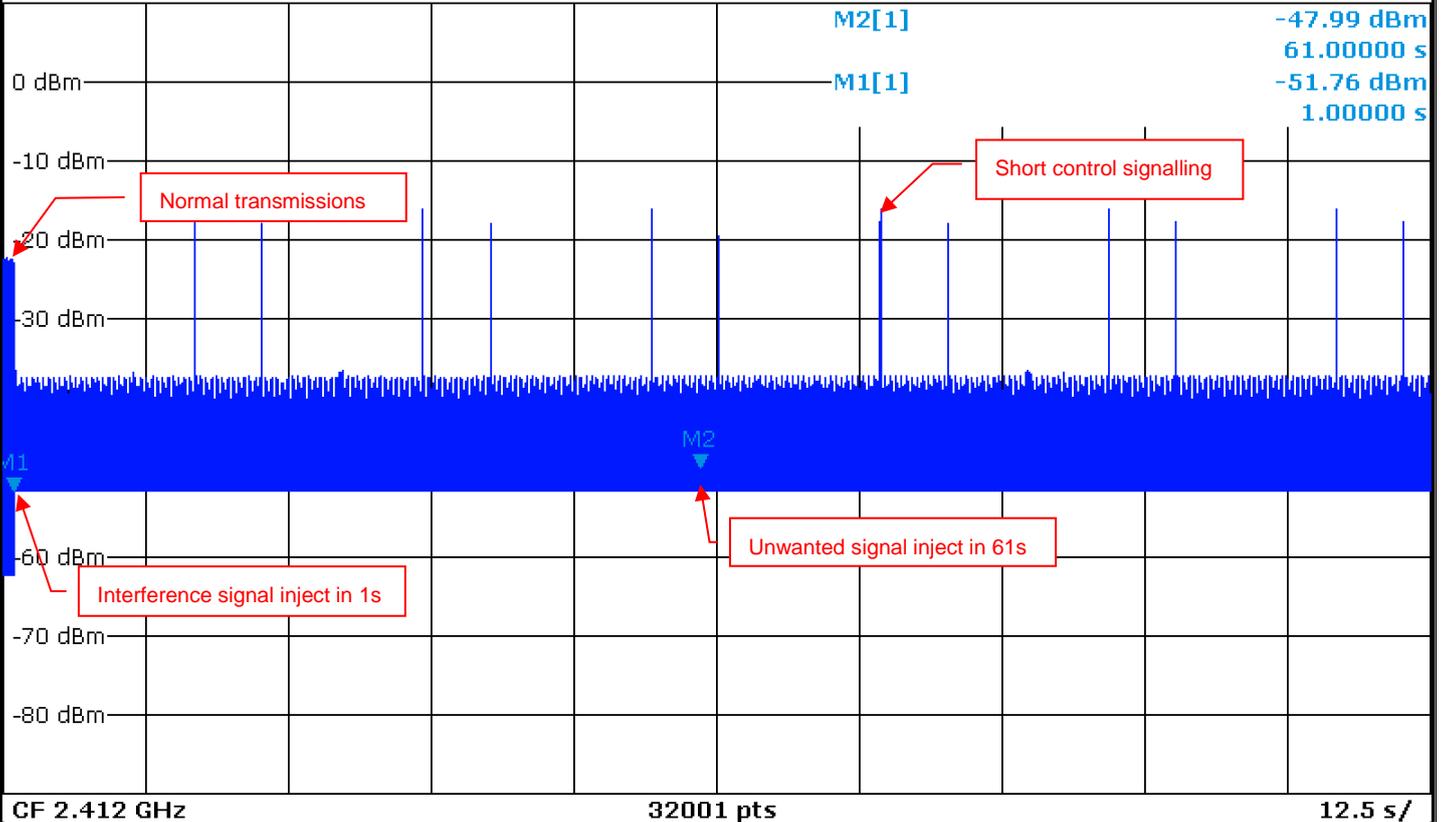


Plots of Adaptivity

Spectrum

Ref Level 10.00 dBm RBW 10 MHz
Att 20 dB SWT 125 s VBW 10 MHz

SGL TRG:EXT

1Rm Clrw

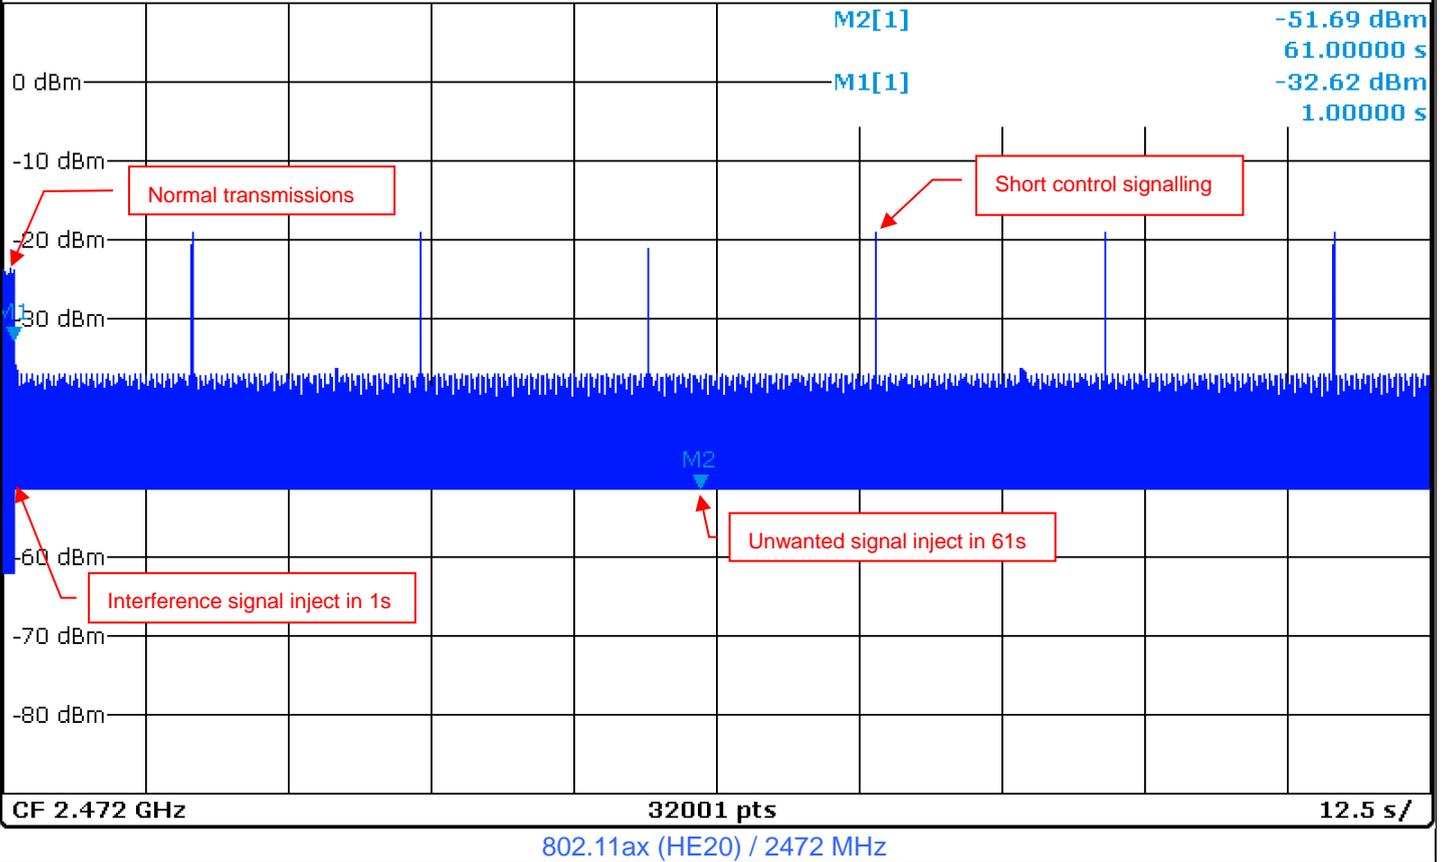




Plots of Adaptivity

Spectrum

Ref Level 10.00 dBm RBW 10 MHz
Att 20 dB SWT 125 s VBW 10 MHz

SGL TRG:EXT

1Rm Clrw

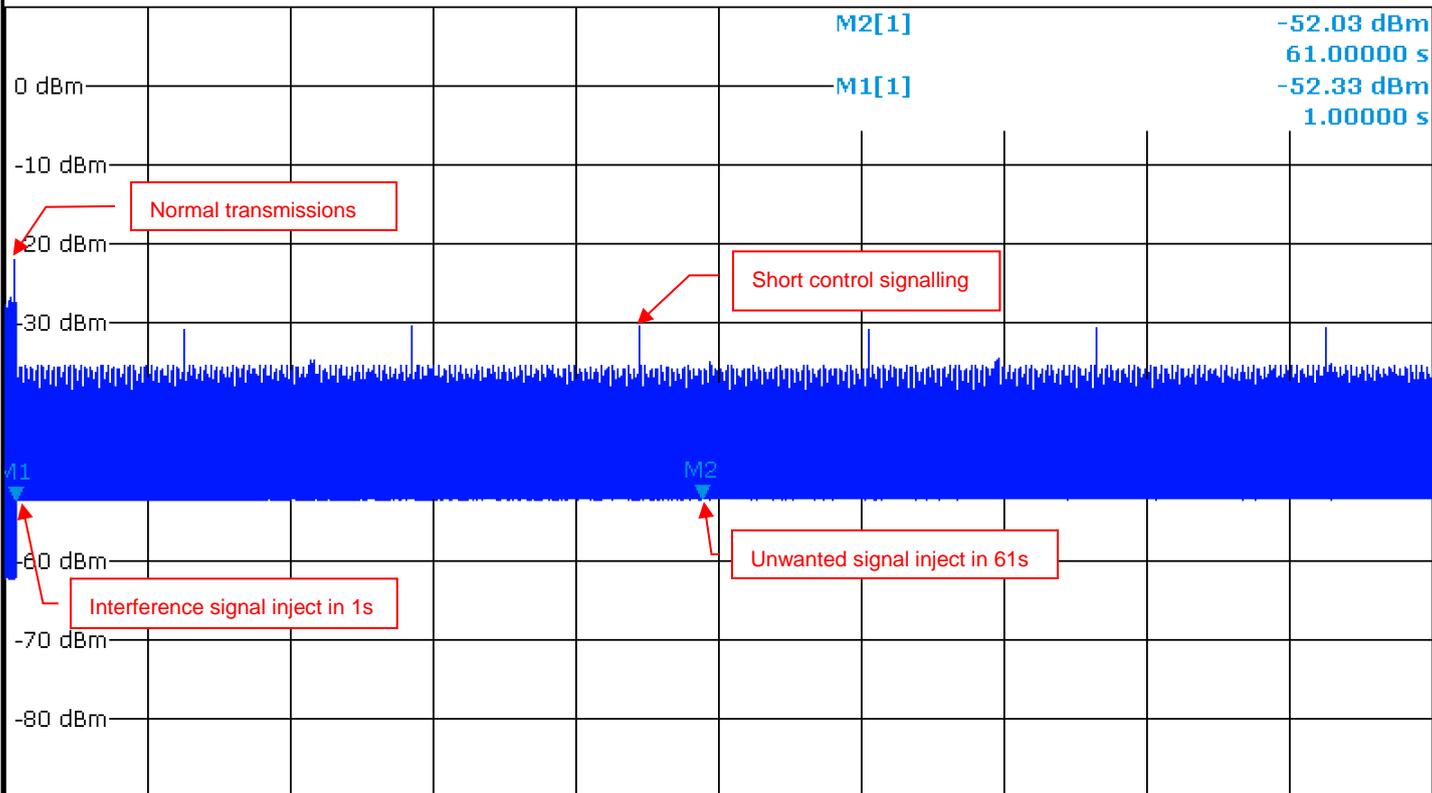

CF 2.422 GHz

32001 pts

12.5 s/

802.11ax (HE40) / 2422 MHz


Plots of Adaptivity

Spectrum

Ref Level 10.00 dBm RBW 10 MHz
Att 20 dB SWT 125 s VBW 10 MHz

SGL TRG:EXT

1Rm Clrw

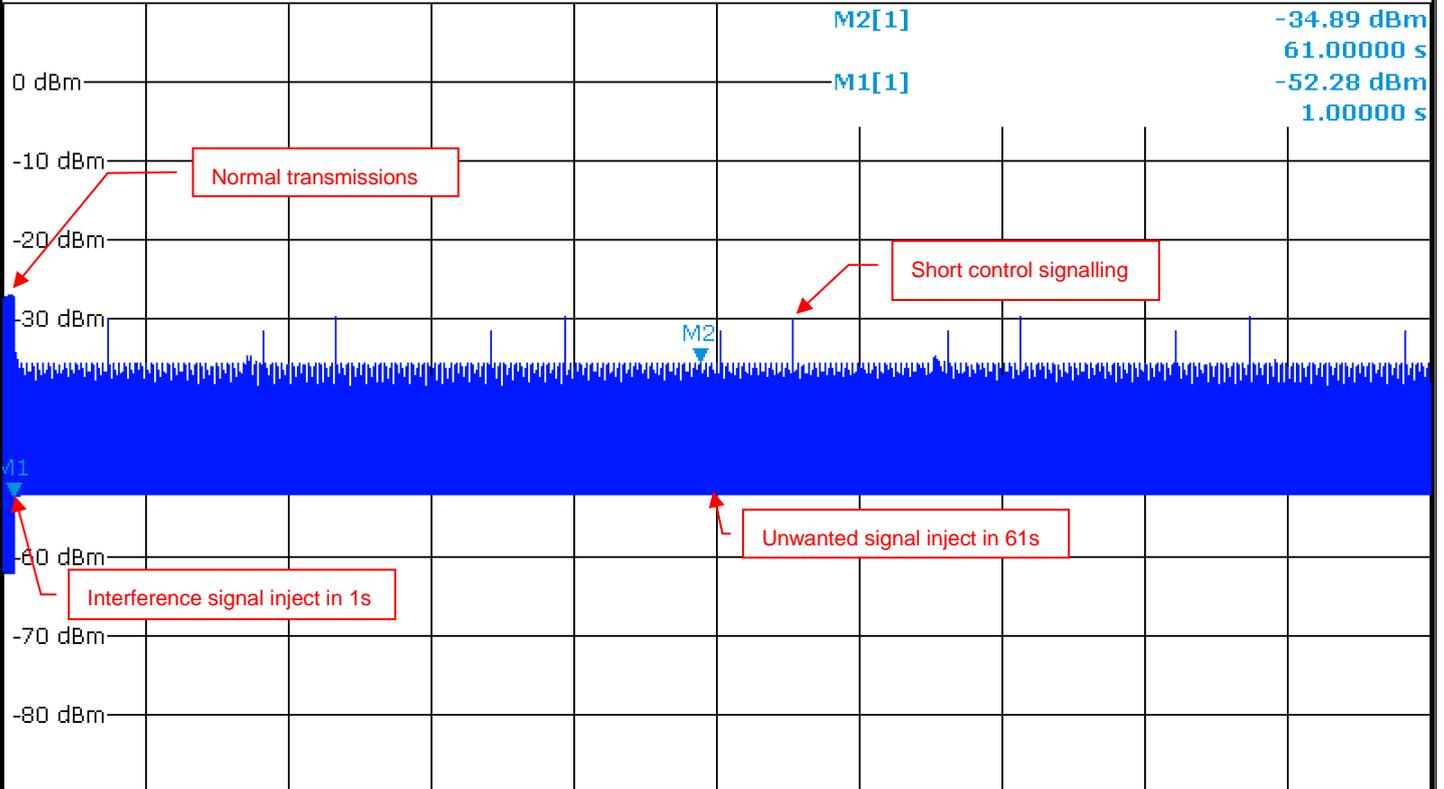

CF 2.462 GHz

32001 pts


12.5 s/

802.11ax (HE40) / 2462 MHz

For Channel Occupancy Time and Idle Period

Operation Mode	Operating Frequency (MHz)	The Channel Occupancy Time (ms)		Minimum Idle Period (us)		Test Result
		Value	Limit	Value	Limit	
802.11b	2412	1.54	13	18.13	18	Pass
802.11g	2412	0.25	13	18.28	18	Pass
802.11ax (HE20)	2412	4.15	13	107.5	18	Pass
802.11ax (HE40)	2422	1.06	13	18.75	18	Pass

Plots of Channel Occupancy Time and Idle Period

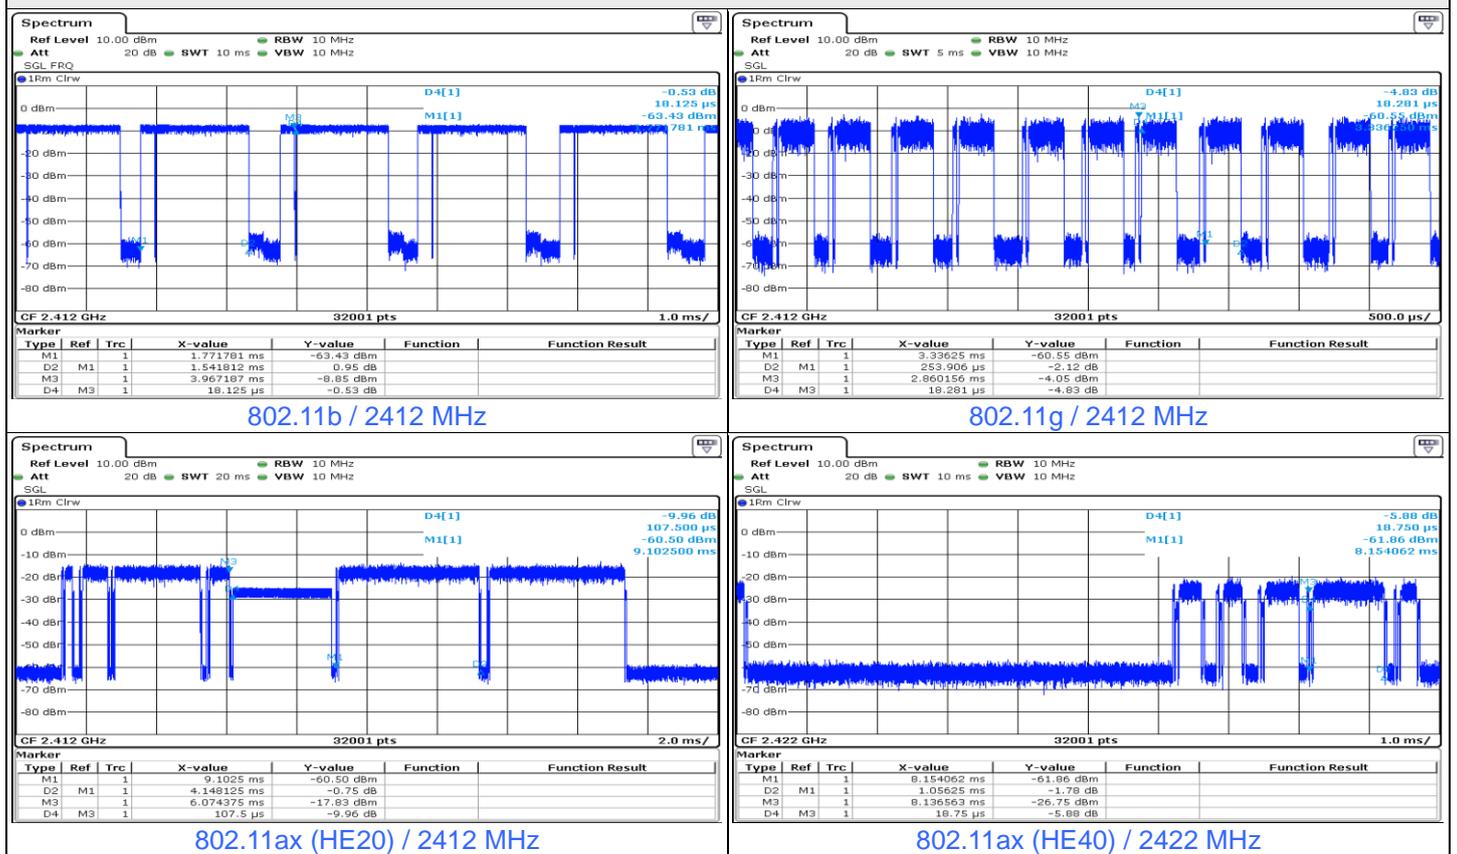


For Short Control Signalling Transmission

Operation Mode	Operating Frequency (MHz)	SCST Total On Time (ms)	SCST Limit (ms)	Test Result
802.11b	2412	0	5	Pass
	2472	0	5	Pass
802.11g	2412	0.3	5	Pass
	2472	1.69	5	Pass
802.11ax (HE20)	2412	1.22	5	Pass
	2472	1.23	5	Pass
802.11ax (HE40)	2422	1.9	5	Pass
	2462	3.61	5	Pass


Plots of Short Control Signalling Transmission

Duty Cycle

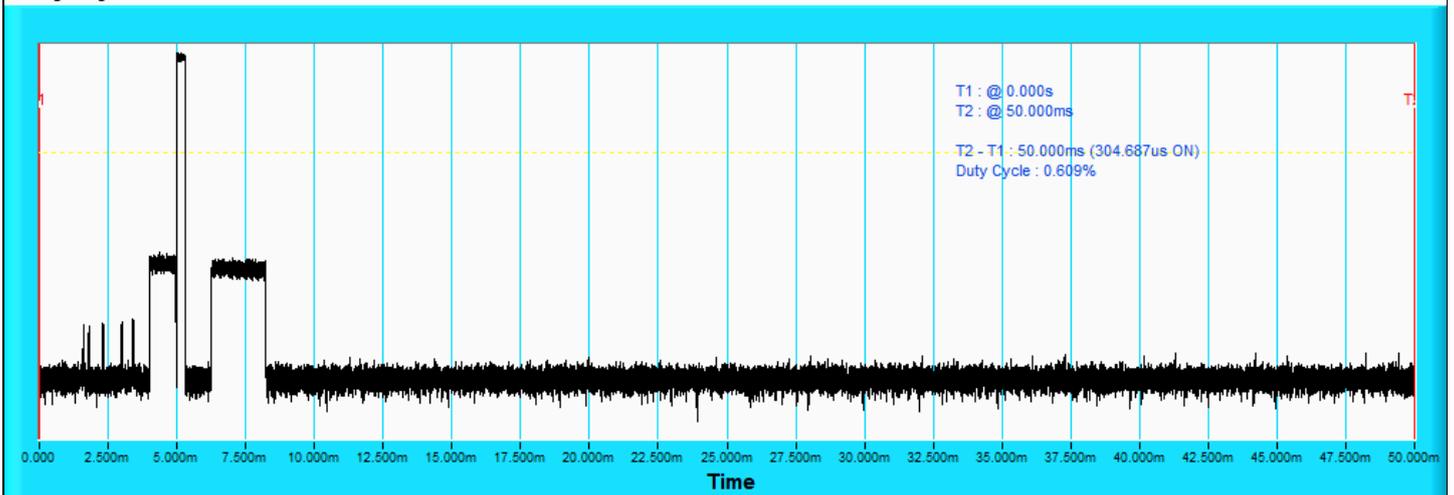

802.11g / 2412 MHz


Duty Cycle

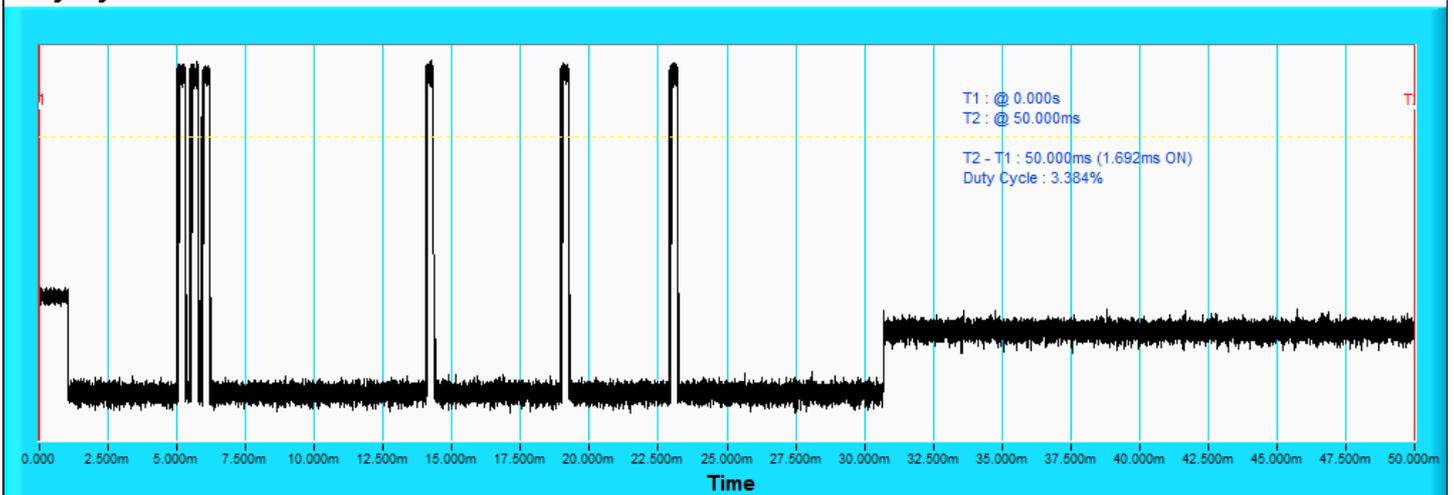

802.11g / 2472 MHz


Plots of Short Control Signalling Transmission

Duty Cycle

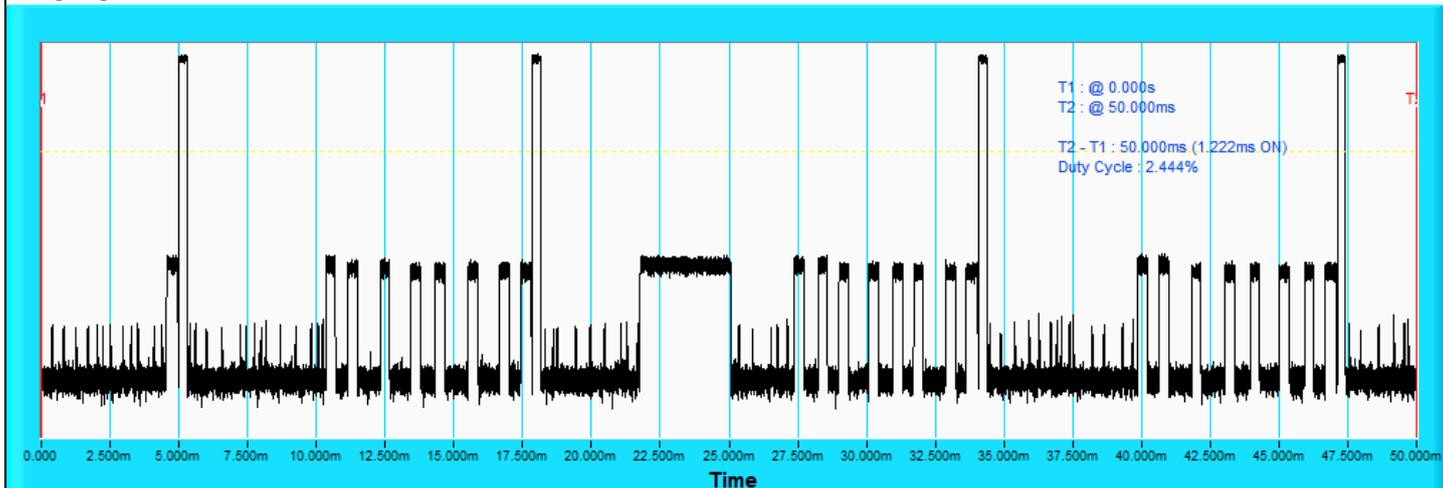


802.11ax (HE20) / 2412 MHz

Duty Cycle

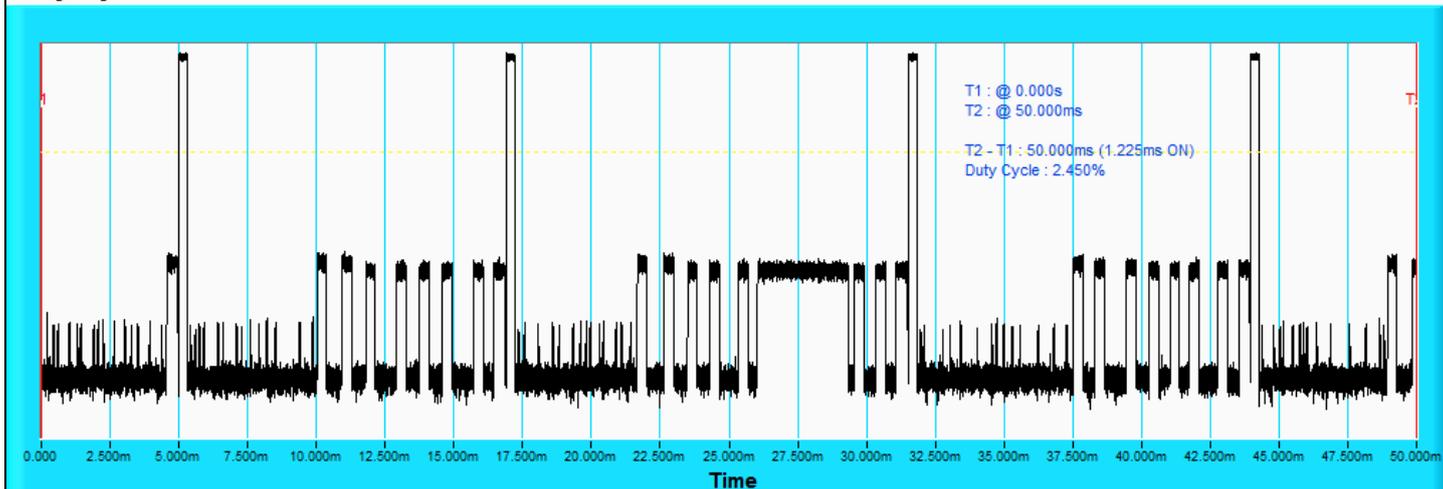

802.11ax (HE20) / 2472 MHz

Duty Cycle

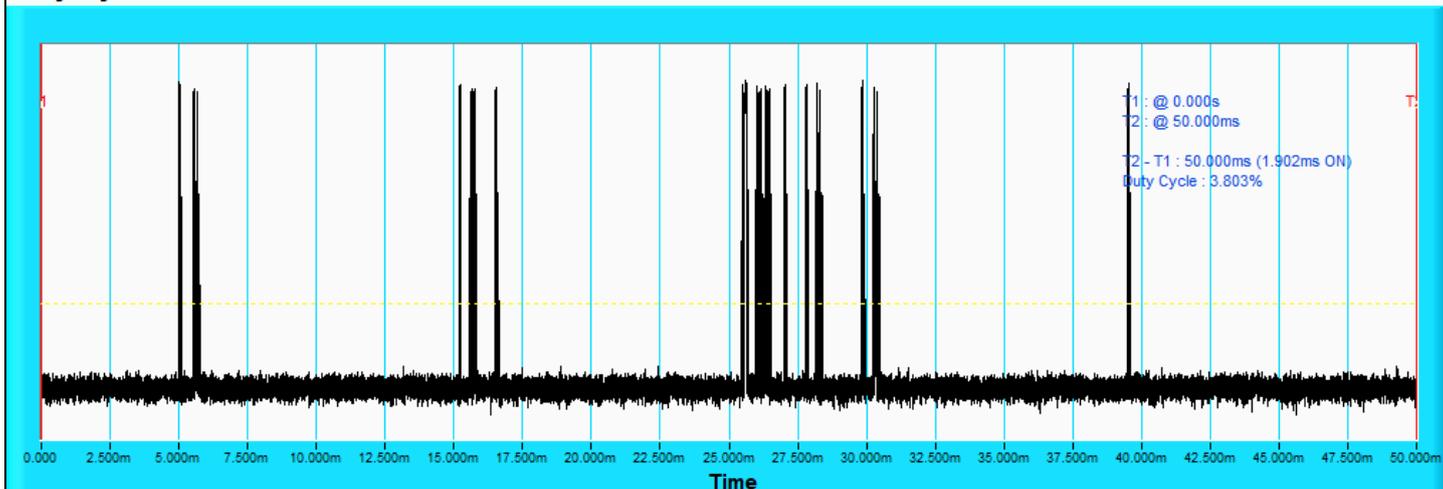


802.11ax (HE40) / 2422 MHz



Plots of Short Control Signalling Transmission

Duty Cycle

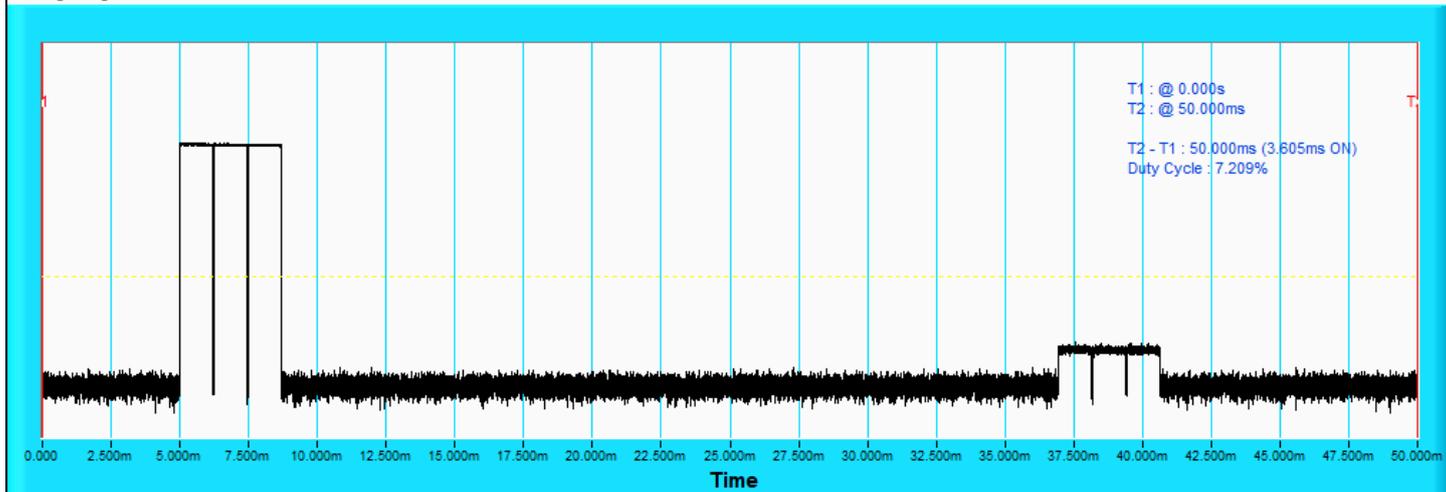

802.11ax (HE40) / 2462 MHz



For Unwanted Signal Interference

Operation Mode	Operating Frequency (MHz)	Wanted Signal Mean Power From Companion Device (dBm)	Unwanted Signal Frequency (MHz)	Unwanted CW Signal Power (dBm)	Test Result
802.11b	2412	-50	2488.5	-31.6	Pass
	2472	-50	2395	-31.6	Pass
802.11g	2412	-50	2488.5	-31.6	Pass
	2472	-50	2395	-31.6	Pass
802.11ax (HE20)	2412	-50	2488.5	-31.6	Pass
	2472	-50	2395	-31.6	Pass
802.11ax (HE40)	2422	-50	2488.5	-31.6	Pass
	2462	-50	2395	-31.6	Pass

Note: In conducted measurements, the unwanted signal power level has to be corrected for the (in-band) antenna assembly gain (G) at the antenna connector. The antenna gain is 3.4 dBi.

7.4 Occupied Channel Bandwidth

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Dolly Chung
--------------	---------	---------------------------	--------------	------------	-------------

802.11b

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Test Result
			FL (MHz)	FH (MHz)		
1	2412	14.92	2404.52	2419.44	FL > 2400 MHz and FH < 2483.5 MHz	Pass
13	2472	14.92	2464.52	2479.44		Pass

Notes:

1. FL is the lowest frequency of the 99% occupied bandwidth of power envelope.
2. FH is the highest frequency of the 99% occupied bandwidth of power envelope.

802.11g

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Test Result
			FL (MHz)	FH (MHz)		
1	2412	16.52	2403.72	2420.24	FL > 2400 MHz and FH < 2483.5 MHz	Pass
13	2472	16.52	2463.72	2480.24		Pass

Notes:

1. FL is the lowest frequency of the 99% occupied bandwidth of power envelope.
2. FH is the highest frequency of the 99% occupied bandwidth of power envelope.

802.11ax (HE20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Test Result
			FL (MHz)	FH (MHz)		
1	2412	18.92	2402.52	2421.44	FL > 2400 MHz and FH < 2483.5 MHz	Pass
13	2472	18.92	2462.52	2481.44		Pass

Notes:

1. FL is the lowest frequency of the 99% occupied bandwidth of power envelope.
2. FH is the highest frequency of the 99% occupied bandwidth of power envelope.

802.11ax (HE40)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Test Result
			FL (MHz)	FH (MHz)		
3	2422	38.08	2402.96	2441.04	FL > 2400 MHz and FH < 2483.5 MHz	Pass
11	2462	38.08	2442.96	2481.04		Pass

Notes:

1. FL is the lowest frequency of the 99% occupied bandwidth of power envelope.
2. FH is the highest frequency of the 99% occupied bandwidth of power envelope.

802.11ax (HE20) RU26

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Test Result
			FL (MHz)	FH (MHz)		
1	2412	15.92	2402.32	2418.24	FL > 2400 MHz and FH < 2483.5 MHz	Pass
13	2472	15.80	2465.88	2481.68		Pass

Notes:

1. FL is the lowest frequency of the 99% occupied bandwidth of power envelope.
2. FH is the highest frequency of the 99% occupied bandwidth of power envelope.

802.11ax (HE20) RU52

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Test Result
			FL (MHz)	FH (MHz)		
1	2412	15.48	2402.40	2417.88	FL > 2400 MHz and FH < 2483.5 MHz	Pass
13	2472	15.40	2466.20	2481.60		Pass

Notes:

1. FL is the lowest frequency of the 99% occupied bandwidth of power envelope.
2. FH is the highest frequency of the 99% occupied bandwidth of power envelope.

802.11ax (HE20) RU106

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	Measured Frequencies		Limit	Test Result
			FL (MHz)	FH (MHz)		
1	2412	15.48	2402.40	2417.88	FL > 2400 MHz and FH < 2483.5 MHz	Pass
13	2472	15.28	2466.28	2481.56		Pass

Notes:

1. FL is the lowest frequency of the 99% occupied bandwidth of power envelope.
2. FH is the highest frequency of the 99% occupied bandwidth of power envelope.

7.5 Transmitter Unwanted Emissions in the out-of-band Domain

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Dolly Chung
--------------	---------	---------------------------	--------------	------------	-------------

802.11b

Channel	Frequency (MHz)	Out-Of-Band Domain			Limit (dBm/MHz)	Test Result
		Frequency Range (MHz)	Worst Frequency (MHz)	Emission Level (dBm/MHz)		
1	2412	2370.16 ~ 2385.08	2384.58	-44.11	-20	Pass
		2385.08 ~ 2400	2397.50	-31.97	-10	Pass
13	2472	2483.5 ~ 2498.42	2485.00	-33.89	-10	Pass
		2498.42 ~ 2513.34	2498.92	-45.87	-20	Pass

802.11g

Channel	Frequency (MHz)	Out-Of-Band Domain			Limit (dBm/MHz)	Test Result
		Frequency Range (MHz)	Worst Frequency (MHz)	Emission Level (dBm/MHz)		
1	2412	2366.96 ~ 2383.48	2382.98	-42.84	-20	Pass
		2383.48 ~ 2400	2399.50	-16.58	-10	Pass
13	2472	2483.5 ~ 2500.02	2484.00	-14.40	-10	Pass
		2500.02 ~ 2516.54	2500.52	-43.10	-20	Pass

802.11ax (HE20)

Channel	Frequency (MHz)	Out-Of-Band Domain			Limit (dBm/MHz)	Test Result
		Frequency Range (MHz)	Worst Frequency (MHz)	Emission Level (dBm/MHz)		
1	2412	2362.16 ~ 2381.08	2380.58	-43.38	-20	Pass
		2381.08 ~ 2400	2399.50	-14.37	-10	Pass
13	2472	2483.5 ~ 2502.42	2484.00	-12.74	-10	Pass
		2502.42 ~ 2521.34	2502.92	-41.85	-20	Pass

802.11ax (HE40)

Channel	Frequency (MHz)	Out-Of-Band Domain			Limit (dBm/MHz)	Test Result
		Frequency Range (MHz)	Worst Frequency (MHz)	Emission Level (dBm/MHz)		
3	2422	2323.84 ~ 2361.92	2361.42	-45.40	-20	Pass
		2361.92 ~ 2400	2399.50	-14.29	-10	Pass
11	2462	2483.5 ~ 2521.58	2484.00	-14.16	-10	Pass
		2521.58 ~ 2559.66	2525.08	-45.70	-20	Pass

802.11ax (HE20) RU26

Channel	Frequency (MHz)	Out-Of-Band Domain			Limit (dBm/MHz)	Test Result
		Frequency Range (MHz)	Worst Frequency (MHz)	Emission Level (dBm/MHz)		
1	2412	2368.16 ~ 2384.08	2383.58	-47.65	-20	Pass
		2384.08 ~ 2400	2399.50	-16.28	-10	Pass
13	2472	2483.5 ~ 2499.3	2484.00	-14.20	-10	Pass
		2499.3 ~ 2515.1	2499.80	-47.72	-20	Pass

802.11ax (HE20) RU52

Channel	Frequency (MHz)	Out-Of-Band Domain			Limit (dBm/MHz)	Test Result
		Frequency Range (MHz)	Worst Frequency (MHz)	Emission Level (dBm/MHz)		
1	2412	2369.04 ~ 2384.52	2384.02	-46.34	-20	Pass
		2384.52 ~ 2400	2399.50	-11.70	-10	Pass
13	2472	2483.5 ~ 2498.9	2484.00	-12.04	-10	Pass
		2498.9 ~ 2514.3	2499.40	-43.92	-20	Pass

802.11ax (HE20) RU106

Channel	Frequency (MHz)	Out-Of-Band Domain			Limit (dBm/MHz)	Test Result
		Frequency Range (MHz)	Worst Frequency (MHz)	Emission Level (dBm/MHz)		
1	2412	2369.04 ~ 2384.52	2384.02	-43.19	-20	Pass
		2384.52 ~ 2400	2399.50	-12.47	-10	Pass
13	2472	2483.5 ~ 2498.78	2484.00	-11.75	-10	Pass
		2498.78 ~ 2514.06	2499.28	-39.34	-20	Pass

7.6 Transmitter Unwanted Emissions in the Spurious Domain up to 1 GHz

Mode A

802.11b

Spurious Emission Frequency Range	30 MHz ~ 1 GHz	Operating Channel	13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Jeff Hsieh		

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
49.40	H	-62.17	-54.00	-8.17
54.08	V	-58.21	-54.00	-4.21
63.53	H	-70.13	-54.00	-16.13
63.53	V	-69.10	-54.00	-15.10
99.79	V	-68.18	-54.00	-14.18
99.89	H	-72.00	-54.00	-18.00
223.05	H	-66.34	-54.00	-12.34
223.45	V	-65.48	-54.00	-11.48
497.89	V	-71.13	-54.00	-17.13
498.19	H	-72.06	-54.00	-18.06
543.50	H	-69.98	-54.00	-15.98
543.50	V	-72.80	-54.00	-18.80
566.63	V	-73.01	-54.00	-19.01
566.68	H	-74.71	-54.00	-20.71
589.76	H	-75.62	-54.00	-21.62
589.76	V	-73.08	-54.00	-19.08
636.03	H	-74.67	-54.00	-20.67
640.06	V	-74.50	-54.00	-20.50
651.50	H	-74.77	-54.00	-20.77
676.17	V	-74.49	-54.00	-20.49

802.11ax (HE) 26-tone RU

Spurious Emission Frequency Range	30 MHz ~ 1 GHz	Operating Channel	13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Jeff Hsieh		

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
54.08	H	-65.15	-54.00	-11.15
54.08	V	-57.96	-54.00	-3.96
63.53	H	-70.85	-54.00	-16.85
63.53	V	-69.16	-54.00	-15.16
103.07	H	-73.93	-54.00	-19.93
222.71	V	-64.95	-54.00	-10.95
222.86	H	-70.93	-54.00	-16.93
499.78	H	-74.27	-54.00	-20.27
499.83	V	-69.43	-54.00	-15.43
534.60	V	-76.24	-54.00	-22.24
543.50	V	-73.75	-54.00	-19.75
543.55	H	-74.83	-54.00	-20.83
566.68	H	-75.59	-54.00	-21.59
566.68	V	-72.85	-54.00	-18.85
596.98	H	-77.10	-54.00	-23.10
610.76	V	-73.05	-54.00	-19.05
636.03	H	-75.24	-54.00	-21.24
642.64	V	-74.42	-54.00	-20.42
659.11	H	-74.97	-54.00	-20.97
674.98	V	-74.73	-54.00	-20.73

Mode B
802.11b

Spurious Emission Frequency Range	30 MHz ~ 1 GHz	Operating Channel	13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	24°C, 69% RH
Tested By	Ethan Hsu		

Spurious Emission Level

Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
49.40	H	-66.28	-54.00	-12.28
49.40	V	-62.50	-54.00	-8.50
63.48	H	-72.60	-54.00	-18.60
99.59	V	-78.98	-54.00	-24.98
194.15	V	-74.20	-54.00	-20.20
221.56	H	-70.81	-54.00	-16.81
222.81	V	-70.81	-54.00	-16.81
498.24	V	-77.61	-54.00	-23.61
498.34	H	-77.40	-54.00	-23.40
543.50	V	-76.71	-54.00	-22.71
543.55	H	-76.44	-54.00	-22.44
566.63	H	-77.75	-54.00	-23.75
574.89	V	-76.76	-54.00	-22.76
585.14	H	-77.57	-54.00	-23.57
596.18	V	-76.06	-54.00	-22.06
636.03	H	-76.46	-54.00	-22.46
637.92	V	-76.47	-54.00	-22.47
661.59	V	-76.13	-54.00	-22.13
675.57	H	-75.27	-54.00	-21.27
677.51	H	-75.68	-54.00	-21.68



802.11ax (HE) 26-tone RU

Spurious Emission Frequency Range	30 MHz ~ 1 GHz	Operating Channel	13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	24°C, 69% RH
Tested By	Ethan Hsu		

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
49.40	H	-65.86	-54.00	-11.86
49.40	V	-62.74	-54.00	-8.74
63.48	H	-72.10	-54.00	-18.10
99.94	H	-70.38	-54.00	-16.38
99.99	V	-77.41	-54.00	-23.41
192.11	V	-75.04	-54.00	-21.04
222.06	H	-70.41	-54.00	-16.41
222.46	V	-70.81	-54.00	-16.81
497.84	H	-75.69	-54.00	-21.69
508.83	V	-77.97	-54.00	-23.97
533.55	V	-78.30	-54.00	-24.30
543.50	H	-75.94	-54.00	-21.94
566.63	H	-76.19	-54.00	-22.19
577.23	V	-76.66	-54.00	-22.66
580.71	H	-76.89	-54.00	-22.89
587.38	V	-76.01	-54.00	-22.01
616.63	V	-76.10	-54.00	-22.10
636.08	H	-75.26	-54.00	-21.26
662.94	H	-74.29	-54.00	-20.29
675.92	V	-75.85	-54.00	-21.85

Mode C
802.11b

Spurious Emission Frequency Range	30 MHz ~ 1 GHz	Operating Channel	13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	24°C, 69% RH
Tested By	Ethan Hsu		

Spurious Emission Level

Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
49.40	H	-66.28	-54.00	-12.28
49.40	V	-62.50	-54.00	-8.50
54.08	V	-65.93	-54.00	-11.93
63.26	H	-72.92	-54.00	-18.92
193.93	V	-74.42	-54.00	-20.42
221.56	H	-70.81	-54.00	-16.81
222.81	V	-70.81	-54.00	-16.81
498.02	V	-77.83	-54.00	-23.83
498.12	H	-77.62	-54.00	-23.62
543.28	V	-76.93	-54.00	-22.93
543.33	H	-76.66	-54.00	-22.66
566.44	H	-77.86	-54.00	-23.86
574.78	V	-76.97	-54.00	-22.97
584.92	H	-77.79	-54.00	-23.79
596.07	V	-76.17	-54.00	-22.17
635.92	H	-76.67	-54.00	-22.67
637.71	V	-76.68	-54.00	-22.68
661.59	V	-76.13	-54.00	-22.13
675.35	H	-75.49	-54.00	-21.49
677.51	H	-75.68	-54.00	-21.68

802.11ax (HE) 26-tone RU

Spurious Emission Frequency Range	30 MHz ~ 1 GHz	Operating Channel	13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	24°C, 69% RH
Tested By	Ethan Hsu		

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
49.29	H	-65.97	-54.00	-11.97
49.40	V	-62.74	-54.00	-8.74
63.37	H	-72.21	-54.00	-18.21
99.83	H	-70.59	-54.00	-16.59
99.88	V	-77.52	-54.00	-23.52
191.99	V	-75.25	-54.00	-21.25
221.95	H	-70.62	-54.00	-16.62
222.24	V	-71.02	-54.00	-17.02
497.73	H	-75.80	-54.00	-21.80
508.61	V	-78.18	-54.00	-24.18
533.44	V	-78.51	-54.00	-24.51
543.39	H	-76.15	-54.00	-22.15
566.52	H	-76.31	-54.00	-22.31
577.11	V	-76.88	-54.00	-22.88
580.50	H	-77.00	-54.00	-23.00
587.26	V	-76.22	-54.00	-22.22
616.51	V	-76.21	-54.00	-22.21
635.87	H	-75.37	-54.00	-21.37
662.82	H	-74.50	-54.00	-20.50
675.81	V	-75.96	-54.00	-21.96

7.7 Transmitter Unwanted Emissions in the Spurious Domain above 1 GHz

Mode A

802.11b

Spurious Emission Frequency Range	1 GHz ~ 12.75 GHz	Operating Channel	1, 13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	22°C, 62% RH
Tested By	Spencer Liao		

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	7234.52	H	-51.48	-30.00	-21.48
	7234.64	V	-45.61	-30.00	-15.61
	9647.64	V	-48.28	-30.00	-18.28
	9648.00	H	-49.53	-30.00	-19.53
13	7414.48	H	-47.40	-30.00	-17.40
	7414.64	V	-44.34	-30.00	-14.34
	9888.00	H	-48.69	-30.00	-18.69
	9888.00	V	-48.11	-30.00	-18.11

802.11ax (HE) 26-tone RU

Spurious Emission Frequency Range	1 GHz ~ 12.75 GHz	Operating Channel	1, 13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	22°C, 62% RH
Tested By	Spencer Liao		

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	7209.54	V	-35.93	-30.00	-5.93
	7211.72	H	-43.68	-30.00	-13.68
	9612.00	H	-49.17	-30.00	-19.17
	9612.00	V	-48.19	-30.00	-18.19
13	7391.64	H	-41.65	-30.00	-11.65
	7391.70	V	-33.15	-30.00	-3.15
	9856.00	H	-48.39	-30.00	-18.39
	9856.00	V	-47.65	-30.00	-17.65

Mode B
802.11b

Spurious Emission Frequency Range	1 GHz ~ 12.75 GHz	Operating Channel	1, 13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	24°C, 70% RH
Tested By	Ethan Hsu		

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	7236.00	H	-53.05	-30.00	-23.05
	7236.00	V	-52.00	-30.00	-22.00
	9648.00	H	-52.43	-30.00	-22.43
	9648.00	V	-49.73	-30.00	-19.73
13	7416.00	H	-47.95	-30.00	-17.95
	7416.00	V	-45.73	-30.00	-15.73
	9888.00	H	-52.16	-30.00	-22.16
	9888.00	V	-50.02	-30.00	-20.02

802.11ax (HE) 26-tone RU

Spurious Emission Frequency Range	1 GHz ~ 12.75 GHz	Operating Channel	1, 13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	22°C, 62% RH
Tested By	Spencer Liao		

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	7211.10	V	-40.14	-30.00	-10.14
	7211.90	H	-43.23	-30.00	-13.23
	9612.40	V	-45.81	-30.00	-15.81
	9612.47	H	-48.40	-30.00	-18.40
13	7389.55	H	-35.22	-30.00	-5.22
	7391.35	V	-33.98	-30.00	-3.98
	9856.00	H	-48.94	-30.00	-18.94
	9856.00	V	-48.02	-30.00	-18.02

Mode C
802.11b

Spurious Emission Frequency Range	1 GHz ~ 12.75 GHz	Operating Channel	1, 13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	22°C, 62% RH
Tested By	Spencer Liao		

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	7234.62	V	-47.91	-30.00	-17.91
	7236.00	H	-46.77	-30.00	-16.77
	9648.00	H	-48.45	-30.00	-18.45
	9648.00	V	-48.27	-30.00	-18.27
13	7414.94	V	-43.60	-30.00	-13.60
	7416.00	H	-44.39	-30.00	-14.39
	9887.78	H	-46.54	-30.00	-16.54
	9887.92	V	-47.22	-30.00	-17.22

802.11ax (HE) 26-tone RU

Spurious Emission Frequency Range	1 GHz ~ 12.75 GHz	Operating Channel	1, 13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	22°C, 62% RH
Tested By	Spencer Liao		

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	7209.25	H	-40.63	-30.00	-10.63
	7212.00	V	-38.85	-30.00	-8.85
	9612.00	H	-49.76	-30.00	-19.76
	9612.00	V	-48.12	-30.00	-18.12
13	7391.90	H	-33.96	-30.00	-3.96
	7392.20	V	-33.37	-30.00	-3.37
	9854.90	V	-46.16	-30.00	-16.16
	9856.00	H	-43.82	-30.00	-13.82

7.8 Receiver Spurious Emissions up to 1 GHz

Mode A

Spurious Emission Frequency Range	30 MHz ~ 1 GHz	Operating Channel	13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	23°C, 67% RH
Tested By	Jeff Hsieh		

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
49.40	H	-62.06	-57.00	-5.06
54.08	V	-60.08	-57.00	-3.08
63.48	H	-70.93	-57.00	-13.93
63.48	V	-68.66	-57.00	-11.66
99.59	V	-68.67	-57.00	-11.67
99.69	H	-67.89	-57.00	-10.89
148.19	V	-64.94	-57.00	-7.94
149.33	H	-65.03	-57.00	-8.03
166.57	V	-63.46	-57.00	-6.46
166.60	H	-60.05	-57.00	-3.05
223.35	V	-64.45	-57.00	-7.45
225.29	H	-65.54	-57.00	-8.54
232.41	V	-62.65	-57.00	-5.65
265.59	H	-69.86	-57.00	-12.86
266.53	V	-67.95	-57.00	-10.95
290.91	V	-69.64	-57.00	-12.64
299.56	H	-68.76	-57.00	-11.76
837.99	H	-70.92	-57.00	-13.92
849.58	V	-69.07	-57.00	-12.07
977.81	H	-70.40	-57.00	-13.40

Mode B

Spurious Emission Frequency Range	30 MHz ~ 1 GHz	Operating Channel	13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	24°C, 69% RH
Tested By	Ethan Hsu		

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
30.00	V	-61.53	-57.00	-4.53
49.40	H	-67.44	-57.00	-10.44
63.53	H	-73.87	-57.00	-16.87
148.19	H	-74.44	-57.00	-17.44
166.60	H	-64.93	-57.00	-7.93
166.60	V	-72.71	-57.00	-15.71
214.20	H	-74.47	-57.00	-17.47
232.41	H	-68.25	-57.00	-11.25
755.41	V	-74.97	-57.00	-17.97
796.50	V	-75.92	-57.00	-18.92
842.36	V	-74.81	-57.00	-17.81
853.36	H	-74.33	-57.00	-17.33
874.94	V	-73.74	-57.00	-16.74
898.27	V	-74.94	-57.00	-17.94
926.08	H	-74.21	-57.00	-17.21
930.66	V	-73.53	-57.00	-16.53
942.94	V	-72.21	-57.00	-15.21
946.43	H	-74.38	-57.00	-17.38
973.83	H	-73.73	-57.00	-16.73
987.32	V	-72.97	-57.00	-15.97

Mode C

Spurious Emission Frequency Range	30 MHz ~ 1 GHz	Operating Channel	13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	24°C, 69% RH
Tested By	Ethan Hsu		

Spurious Emission Level				
Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
30.08	V	-61.65	-57.00	-4.65
49.29	H	-67.55	-57.00	-10.55
63.42	H	-74.08	-57.00	-17.08
148.07	H	-74.66	-57.00	-17.66
166.38	H	-65.15	-57.00	-8.15
166.71	V	-72.62	-57.00	-15.62
214.08	H	-74.69	-57.00	-17.69
232.29	H	-68.47	-57.00	-11.47
755.50	V	-74.86	-57.00	-17.86
796.72	V	-75.71	-57.00	-18.71
842.58	V	-74.69	-57.00	-17.69
853.14	H	-74.55	-57.00	-17.55
875.16	V	-73.52	-57.00	-16.52
898.39	V	-74.72	-57.00	-17.72
925.96	H	-74.42	-57.00	-17.42
930.88	V	-73.31	-57.00	-16.31
943.16	V	-72.09	-57.00	-15.09
946.31	H	-74.50	-57.00	-17.50
973.71	H	-73.94	-57.00	-16.94
987.54	V	-72.85	-57.00	-15.85

7.9 Receiver Spurious Emissions above 1 GHz

Mode A

Spurious Emission Frequency Range	1 GHz ~ 12.75 GHz	Operating Channel	1, 13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	26°C, 69% RH
Tested By	Ethan Hsu		

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	6432.00	H	-55.60	-47.00	-8.60
	6432.00	V	-54.35	-47.00	-7.35
13	6592.00	H	-56.59	-47.00	-9.59
	6592.00	V	-54.67	-47.00	-7.67

Mode B

Spurious Emission Frequency Range	1 GHz ~ 12.75 GHz	Operating Channel	1, 13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	22°C, 62% RH
Tested By	Spencer Liao		

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	6432.18	V	-52.08	-47.00	-5.08
	6432.19	H	-53.28	-47.00	-6.28
13	6592.00	H	-53.34	-47.00	-6.34
	6592.17	V	-52.92	-47.00	-5.92

Mode C

Spurious Emission Frequency Range	1 GHz ~ 12.75 GHz	Operating Channel	1, 13
Input Power (System)	230 Vac, 50 Hz	Environmental Conditions	22°C, 62% RH
Tested By	Spencer Liao		

Spurious Emission Level					
Channel	Frequency (MHz)	Antenna Polarization	Level (dBm)	Limit (dBm)	Margin (dB)
1	6431.98	H	-53.34	-47.00	-6.34
	6431.99	V	-50.88	-47.00	-3.88
13	6592.11	V	-51.50	-47.00	-4.50
	6592.40	H	-53.34	-47.00	-6.34

7.10 Receiver Blocking

Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Thomas Liao
--------------	---------	---------------------------	--------------	------------	-------------

Receiver Category 1 Equipment

Minimum Performance Criterion:

PER or FER \leq 10%

Receiver Blocking Measure Of The Capability

Operation Mode	Operating Frequency (MHz)	Wanted Signal Mean Power From Companion Device (dBm) (Note 1 & 2)	Blocking Signal Frequency (MHz)	Blocking Signal Frequency Shift (MHz) (Note 3)	Blocking Signal Power (dBm) (Note 2)	PER(%)	Test Result
11b	2412	-64.6	2380	-	-30.6	2.6	Pass
		-70.6	2300	-	-30.6	3.6	Pass
			2330	-	-30.6	3.7	Pass
			2360	-	-30.6	3.3	Pass
	2472	-64.6	2504	-	-30.6	3.6	Pass
		-70.6	2524	-	-30.6	3.5	Pass
			2584	-	-30.6	4.1	Pass
			2674	-	-30.6	3.9	Pass

Notes:

1. Wanted signal level was calculated based on the formula, which corresponds to OCBW. OCBW is 14.92 MHz.
2. In conducted measurements, the blocking signal power level has to be corrected for the (in-band) antenna assembly gain (G) at the antenna connector. The antenna gain is 3.4 dBi.
3. If the performance criteria is not met, those frequencies of the blocking signal has been increased/decreased with a value equal to the Occupied Channel Bandwidth except the blocking frequencies 2380, 2504MHz shall be increased/decreased with a value equal to 10MHz also if the frequency offset is more than 7MHz, the level of the wanted signal shall be increased by 3dB.



Input Power:	3.3 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Thomas Liao
--------------	---------	---------------------------	--------------	------------	-------------

Test Results for reference by client's requirement.


Receiver Category 1 Equipment	
Minimum Performance Criterion:	PER or FER ≤ 10%

Receiver Blocking Measure Of The Capability							
Operation Mode	Operating Frequency (MHz)	Worst Wanted Signal Mean Power From Companion Device (dBm) (Note 1 & 2)	Blocking Signal Frequency (MHz)	Blocking Signal Frequency Shift (MHz) (Note 3)	Blocking Signal Power (dBm) (Note 2)	PER(%)	Test Result
11b	2412	-84	2380	-	-30.6	3.4	Pass
		-84	2300	-	-30.6	3.8	Pass
			2330	-	-30.6	3.1	Pass
			2360	-	-30.6	3.4	Pass
	2472	-85	2504	-	-30.6	3.4	Pass
		-85	2524	-	-30.6	3.3	Pass
			2584	-	-30.6	4.6	Pass
			2674	-	-30.6	3.7	Pass

- Notes:
1. Wanted signal level was calculated based on the formula, which corresponds to OCBW. OCBW is 14.92 MHz.
 2. In conducted measurements, the blocking signal power level has to be corrected for the (in-band) antenna assembly gain (G) at the antenna connector. The antenna gain is 3.4 dBi.
 3. If the performance criteria is not met, those frequencies of the blocking signal has been increased/decreased with a value equal to the Occupied Channel Bandwidth except the blocking frequencies 2380, 2504MHz shall be increased/decreased with a value equal to 10MHz also if the frequency offset is more than 7MHz, the level of the wanted signal shall be increased by 3dB.

8 Pictures of Test Arrangements


Mode A

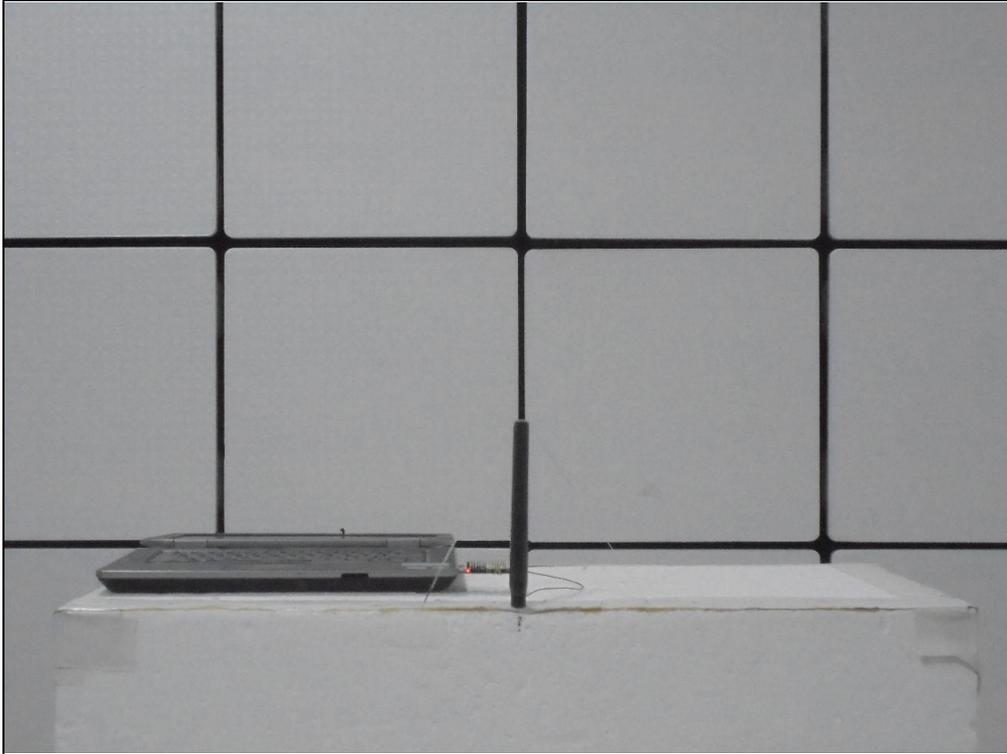

Mode B



Mode C

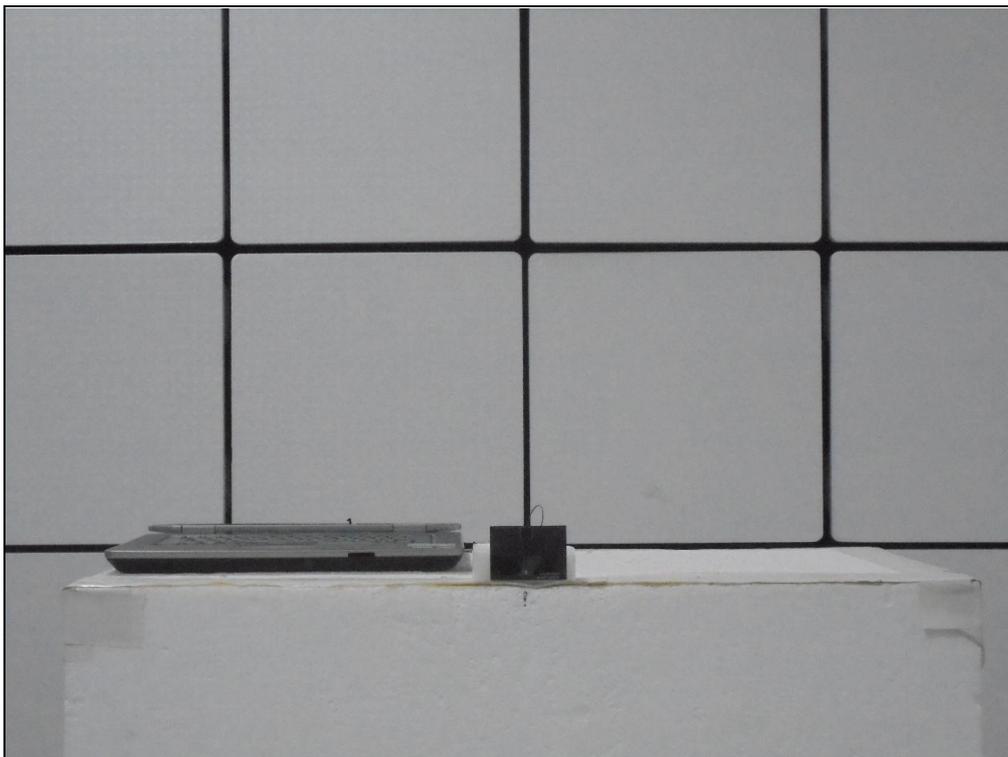

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---