



Report No: TW2112123-03E

File Reference No: 2022-02-28

Applicant: Eastern Times Technology Co.,Ltd

Product: WIRED/2.4G/BT MECHANICAL GAMING KEYBOARD

Model No: K618-RGB, ET-8536, K618W-RGB

Trademark: REDRAGON

Test Standards: ETSI EN301 489-1 v 2.2.3 (2019-11)
ETSI EN301 489-3 v 2.1.1 (2019-03)
ETSI EN301 489-17 v 3.2.4 (2020-09)

Test Result: The EMC testing has been performed on the submitted samples and found in compliance with council Radio Equipment Directive (RED) 2014/53/EU

Approved By

Terry Tang

EMC Manager

Dated: February 28, 2022

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES.

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (+86 755)8344 8688 Fax (+86 755)8344 2996 Email:info@timeway-lab.com



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01



Table of Contents

1.0	General Details	4
1.1	Notes	4
1.2	Test Lab Details	4
1.3	Details of Applicant	4
1.4	Application Details	4
1.5	Test Item	5
1.6	Equipment Classification	5
1.7	List of Ports	5
1.8	Ancillary and Peripheral Devices	6
1.9	Test Standards	6
1.10	Test By	7
2.0	Technical Test	7
2.1	Summary of Test Result	7
2.2	Test Report	7
	Clause 8.2 Emission Test- Radiated Emissions	10
	Clause 8.4 AC Line Conducted Emissions	20
	Clause 8.5 Harmonic Current Emissions	25
	Clause 8.6 Flicker and Voltage Fluctuation	27
	Clause 9.2 Immunity Test- Radiated, RF Electromagnetic Fields	28
	Clause 9.3 Electrostatic Discharge	29
	Clause 9.4 Fast Transient Common Mode	30
	Clause 9.5 RF Common Mode	31
	Clause 9.7 Voltage Dips	32
	Clause 9.8 Surge Common & differential Mode (1-phase)	33
3.0	CE Label	34
4.0	Photograph-Test Set up	35
4.1	Photograph – Conducted Emission Test Set up	35
4.2	Photograph – Radiated Emissions Test Set up	36
4.3	Photograph – ESD Test Set up	37
4.4	Photograph – EFT/B, Surge, Voltage Dips Test Setup	38
4.5	Photograph – CS Test Setup	38
5.0	Photograph-EUT	39
6.0	Test Equipments	39

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



1. General Information

1.1 Notes

The test results of this report relate exclusively to the test item specified in 1.5. The TIMEWAY Lab does not assume Responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the TIMEWAY Lab.

1.2 Testing Laboratory

SHENZHEN TIMEWAY TESTING LABORATORIES.

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel: +86 755 83448688 Fax :+86 755 83442996

Internet: www.timeway-lab.com

Site on File With the Federal Communications and Commission – United States

Registration Number: 744189

For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.3 Details of Applicant

Name: Eastern Times Technology Co.,Ltd

Address: Building D, Nan An Industrial Area, Youganpu Village, Fenggang Town, Dongguan City, Guangdong, China.

1.4 Application Details

Date of Receipt of Application: December 19, 2022

Date of Receipt of Test Item: December 19, 2022

Date of Test: December 19, 2021 ~ February 25, 2022

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



1.5 Test Item

Manufacturer: Eastern Times Technology Co.,Ltd

Address: Building D, Nan An Industrial Area, Youganpu Village, Fenggang Town, Dongguan City, Guangdong, China.

Trademark: REDRAGON

Model No.: K618-RGB

Additional Model: ET-8536

Description: WIRED/2.4G/BT MECHANICAL GAMING KEYBOARD

Additional Information

Frequency 1: 2403MHz-2480MHz for Keyboard/dongle Part;

Channel List for 2.4G (Unit: MHz): 2403, 2424, 2441, 2461, 2414, 2435, 2450, 2470, 2409, 2429, 2455, 2475, 2419, 2445, 2465, 2480

Modulation Type: GFSK

Frequency 2: 2402MHz-2480MHz for Keyboard Bluetooth mode

Channel Separation: 1MHz for Bluetooth

Modulation Type: GFSK (Bluetooth)

Antenna Designation: PCB Printed Antenna with maximum gain -1.85dBi or keyboard part and 1.66dBi for USB dongle part

Rating: DC5V hosted from PC for USB dongle part; DC5V, 740mA or DC3.7V, 270mA for Keyboard Part

Battery: DC3.7V, 1900mAh or keyboard part (Li-ion battery)

Operation Distance: N/A

Resolution: N/A

Extreme Temp. Tolerance: -20°C to 55°C

Note: Classification according to CEPT/ERC Recommendation 70-03 & ETSI EN301 489-3 v 2.1.1 (2019-03) and ETSI EN301 489-17 v 3.2.4 (2020-09)

1.6 Equipment Classification

Equipment Category: 3

1.7 List of Ports

Port	Description	Classification ¹	Maximum cable Length	Cable Type
N/A				

Note ¹ports shall be classified as ac power, dc power or signal/control port.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



²Maximum cable length corresponding to the appropriate ports shall be classified as $\leq 3\text{m}$ or $> 3\text{m}$.

1.8 Ancillary and Peripheral Devices

Description	Designation	Serial No.	Manufacturer
N/A			

List of Peripheral Devices Used for Testing

Description	Designation	Serial No.	Manufacturer
N/A			

Note: An Equipment (apparatus) used in connection with a receiver or transmitter is considered as an ancillary Equipment (apparatus) if:

- The equipment is intended for use in conjunction with a receiver or transmitter to provide additional operational and/or control features to the radio equipment. (e.g. to extend control to another position or location); and
- The equipment cannot be used on a stand alone basis to provide user functions independently of a receiver or transmitter; and
- The receiver or transmitter to which it is connected, is capable of providing some intended operation such as transmitting and/or receiving without the ancillary equipment (i.e. it is not a sub-unit of the main equipment essential to the main equipment basic functions).

1.9 Test Standards

ETSI EN 301 489-1 v 2.2.3 (2019-11)
Electromagnetic Compatibility (EMC) standard for radio equipment and services;
Part 1: Common technical requirements
Harmonised Standard for ElectroMagnetic Compatibility
ETSI EN 301 489-3 v 2.1.1 (2019-03)
ElectroMagnetic Compatibility (EMC) standard for radio equipment and services
Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz;
Harmonised Standard covering the essential requirements of article 3.1(b) of Directive 2014/53/EU
ETSI EN301 489-17 v 3.2.4 (2020-09)

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



ElectroMagnetic Compatibility (EMC) standard for radio equipment and services;
Part 17: Specific conditions for Broadband Data Transmission Systems;
Harmonised Standard for ElectroMagnetic Compatibility

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

1.10 Test or Witness Test Engineering

Test By: Andy Xing
Printing Name: Andy Xing

2. Technical Test

2.1 Summary of Test Results

No deviations from the technical specification(s) were ascertained in the course of the tests Performed	
Final Verdict: (Only "Passed" if all Measurements are "Passed")	Pass

2.2 Test Report

Emission (EMI)

EMI Phenomenon	Port	Requirement		EUT Setup	Result	Applicability
		Standard	Basic Standard			
Conducted Interference Voltage	AC Mains	ETSI EN 301489-1: 2019-11 Clause 8.4	EN 55032:2015 +A11:2020 +A1:2020	Refer to Section 4	Complies	Applicable
Radiated Interference Field Strength 30~6000MHz	Enclosure	ETSI EN 301 489-1: 2019-11 Clause 8.2	EN 55032:2015 +A11:2020 +A1:2020	Refer to Section 4	Complies	Applicable
Harmonic Current Emissions	AC Mains Input Port	ETSI EN 301 489-1: 2019-11 Clause 8.5	EN IEC 61000-3-2: 2019+A1:2021	Refer to Section 4	Complies	Not Applicable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Flicker & Voltage Fluctuation	AC Mains Input Port	ETSI EN 301 489-1: 2019-11 Clause 8.6	EN 61000-3-3: 2013+A1:2019	Refer to Section 4	Complies	Not Applicable
-------------------------------	---------------------	---------------------------------------	----------------------------	--------------------	----------	----------------

Immunity (EMS)

EM3 Phenomenon	Port	Requirement		EUT Setup	Result	Applicability
		Standard	Basic Standard			
Electronic Discharge (ESD)	Enclosure	ETSI EN 301 489-1: 2019-11 Clause 9.3	EN 61000-4-2: 2009	Refer to Section 4	Complies	Applicable
RF-Electro-Magnetic Field (80-6000MHz)	Enclosure	ETSI EN 301 489-1: 2019-11 Clause 9.2	EN 61000-4-3: 2006	Refer to Section 4	Complies	Applicable
Fast Transients, Burst	Power Line AC/DC	ETSI EN 301 489-1: 2019-11 Clause 9.4	EN 61000-4-4: 2012	Refer to Section 4	Complies	Applicable
Surge	Power Line (1 phase)	ETSI EN 301 489-1: 2019-11 Clause 9.8	EN 61000-4-5: 2014	Refer to Section 4	Complies	Applicable
Transients & Surge Vehicular Environment	Power Line (Car Charge)	ETSI EN 301 489-1: 2019-11 Clause 9.6	ISO 7637-1/2	Refer to Section 4	Complies	Not Applicable
RF Common Mode (0.15-80MHz)	Power Line AC/DC signal Lines	ETSI EN 301 489-1: 2019-11 Clause 9.5	EN 61000-4-6: 2014	Refer to Section 4	Complies	Applicable
Vol. Dips, Interruptions& Fluctuations (AC Power)	Input& Output AC Ports only	ETSI EN 301 489-1: 2019-11 Clause 9.7	EN 61000-4-11: 2011	Refer to Section 4	Complies	Applicable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



N/A=Not Applicable

-Performance criteria A for immunity tests with phenomena of a continuous nature;

Communication between the Tx and Rx or other BT device in the front of pings should not drop during the test.

-Performance criteria B for immunity tests with phenomena of a transient nature;

N/A

-Performance criteria C for immunity tests with power interruptions exceeding a certain time.

N/A

Note: For details see subclause 6.1 ETSI EN 301 489-3

2.3 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Uncertainty
Conducted Emissions	3.6dB
Radiated Emissions	4.7dB (Below 1GHz); 5.0dB (above 1GHz)
Harmonic Current Emission	1.2%
Voltage Fluctuations and Flicker	1.5%
Electrostatic Discharge	The waveform of voltage: 1.6%; Time: 3.1%
RF Electromagnetic Field	3.1dB
Electrical Fast Transients	The waveform of voltage: 1.5%; Time: 2.9%
Surge	The waveform of voltage: 1.5%; Time: 2.9%
RF Common Mode	3.9dB
Voltage Dips and Interruptions	The waveform of voltage: 1.5%; Time: 2.9%

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 8.2 Emission Test – Radiated Emission

This test assesses the ability of ancillary equipment to limit their internal noise from being radiated from the enclosure.

According to EMC basic standard (EN 55032)

Measurement according to EMC basic standard, The test results correspond to the 3m Semi-Anechoic Chamber results.

The EUT and its simulators are placed on a turntable which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to EN55032: 2015 on radiated measurement.

Radiated emissions were measured over the frequency range from 30MHz to 1 GHz using a receiver bandwidth of 120kHz.

Radiated emissions were measured over the frequency range from 30MHz to 6 GHz

Radiated Emission was performed at an antenna to EUT distance of 3 meters.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or other persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report, The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Radiated Emission Test

Block diagram of Test setup

Distance = 3m

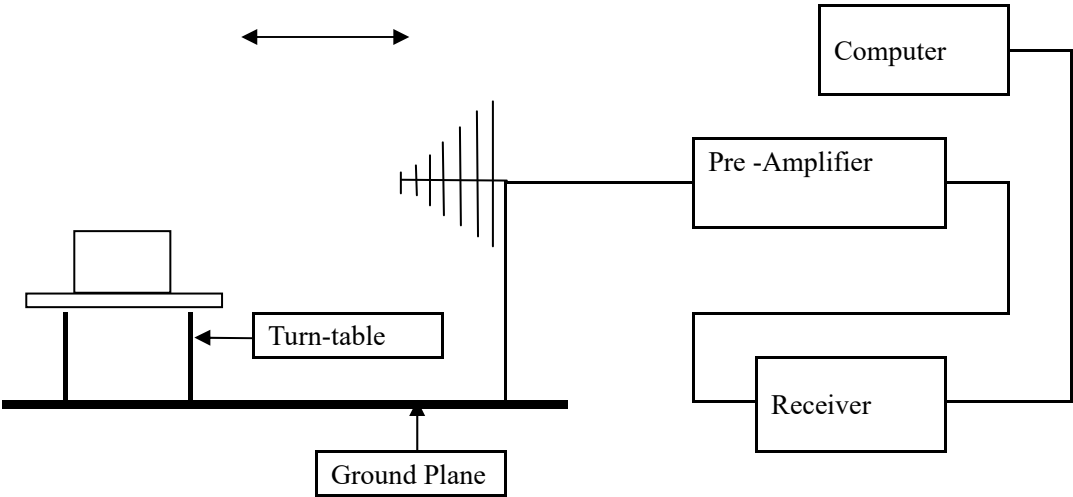

Power line conducted Emission Limit

Frequency Range (MHz)	Distance (m)	Quasi-Peak limits (dB μ V/m)
30-230	10/3	30.0/40.0
230-1000	10/3	37.0/47.0
1000-3000	3	50 (AV) /70 (PK)
3000-6000	3	54 (AV) /74 (PK)

Note: The lower limit shall apply at the transition frequencies

Test result

Please refer to following table

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



A: Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment


Temperature: 25℃ Humidity: 55%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Bluetooth Mode

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

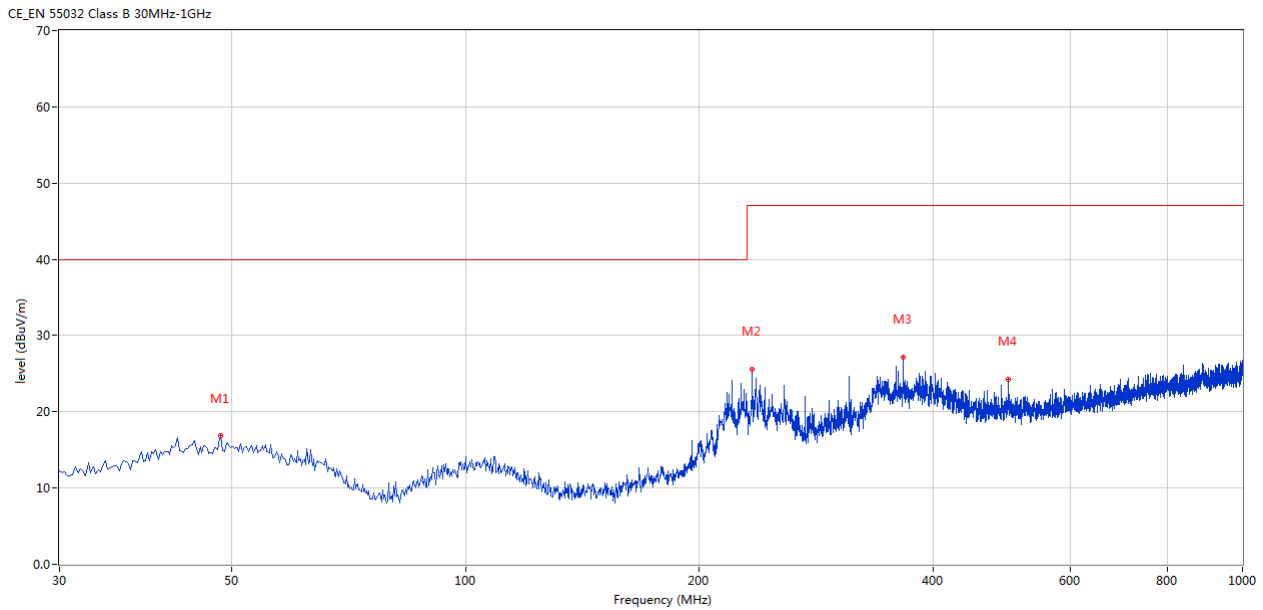

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	48.425	16.82	-11.22	40.0	-23.18	Peak	337.00	100	Horizontal	Pass
2	233.892	25.62	-12.53	47.0	-21.38	Peak	265.00	100	Horizontal	Pass
3	365.779	27.20	-9.46	47.0	-19.80	Peak	279.00	100	Horizontal	Pass
4	500.090	24.29	-6.91	47.0	-22.71	Peak	306.00	100	Horizontal	Pass


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



B: Radiated Disturbance (30MHz----1000MHz)
EUT Operating Environment
Temperature:25℃ Humidity: 55%RH Atmospheric Pressure: 101 kPa
EUT set Condition: Bluetooth Mode
Equipment Level: Class B
Results: Pass
Please refer to following diagram for individual

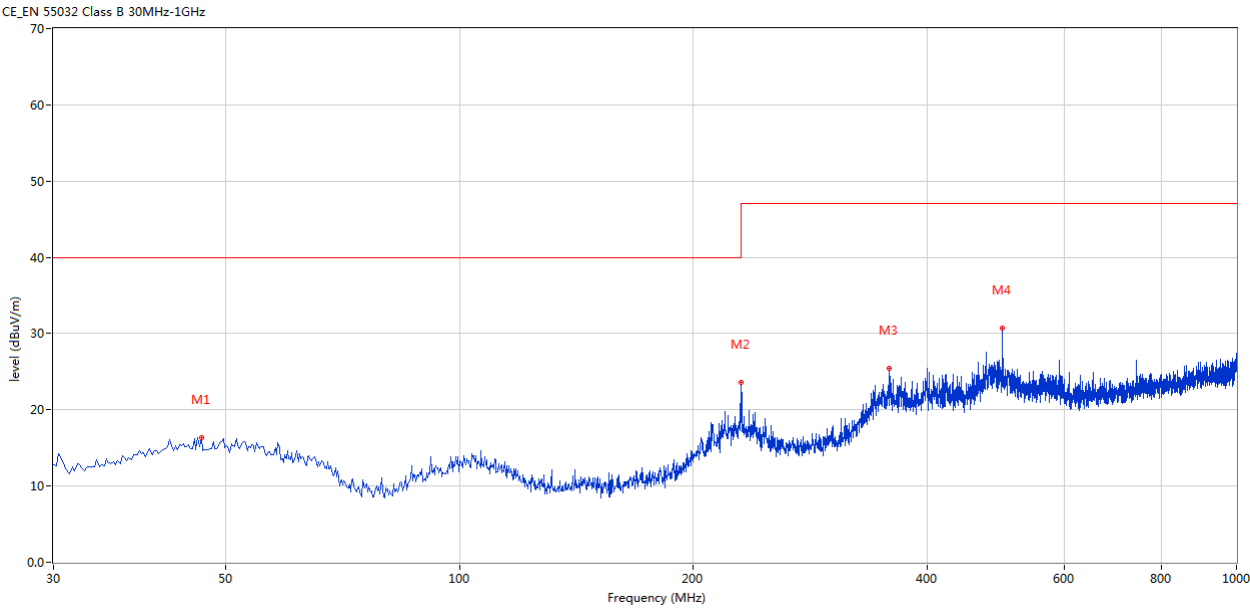


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	46.486	16.38	-11.43	40.0	-23.62	Peak	139.00	100	Vertical	Pass
2	230.497	23.60	-12.67	47.0	-23.40	Peak	321.00	100	Vertical	Pass
3	357.051	25.47	-9.50	47.0	-21.53	Peak	4.00	100	Vertical	Pass
4	500.090	30.70	-6.91	47.0	-16.30	Peak	211.00	100	Vertical	Pass

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



C: Radiated Disturbance (1000MHz---6000MHz) --- Horizontal
EUT Operating Environment
Temperature: 25℃ Humidity: 55%RH Atmospheric Pressure: 101 kPa
EUT set Condition: Bluetooth Mode
Equipment Level: Class B
Results: Pass
Please refer to following diagram for individual

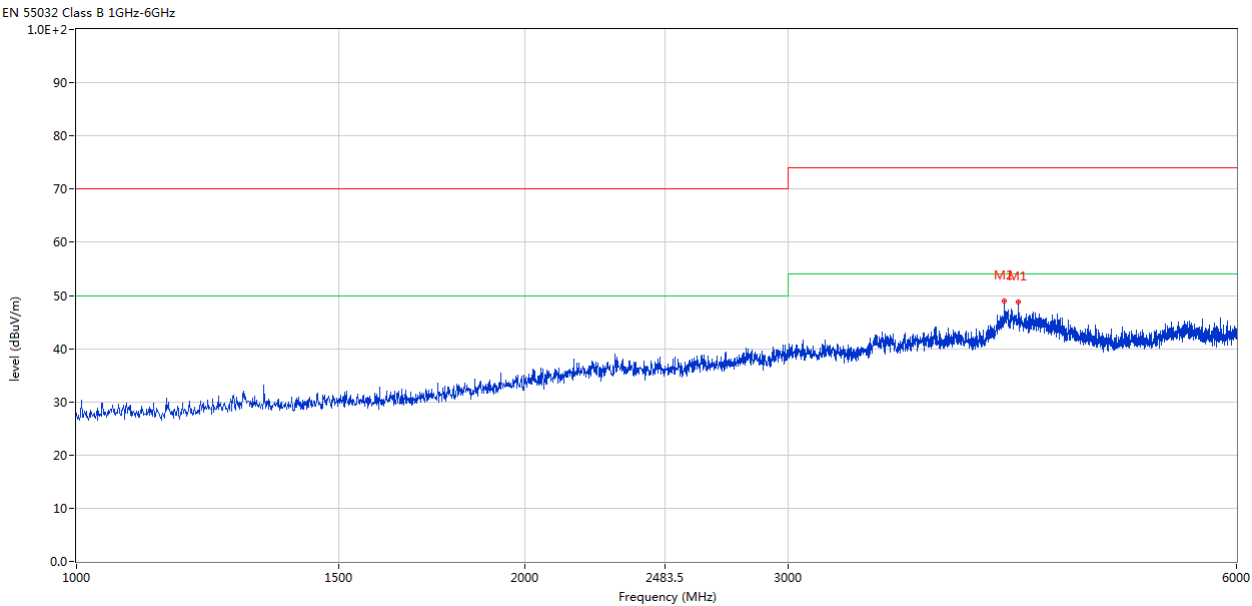

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	4282.929	48.74	1.80	74.0	-25.26	Peak	10.00	100	Horizontal	Pass
2	4194.201	48.91	1.59	74.0	-25.09	Peak	15.00	100	Horizontal	Pass

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



D: Radiated Disturbance (1000MHz----6000MHz) --- Vertical

EUT Operating Environment


Temperature:25℃ Humidity: 55%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Bluetooth Mode

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

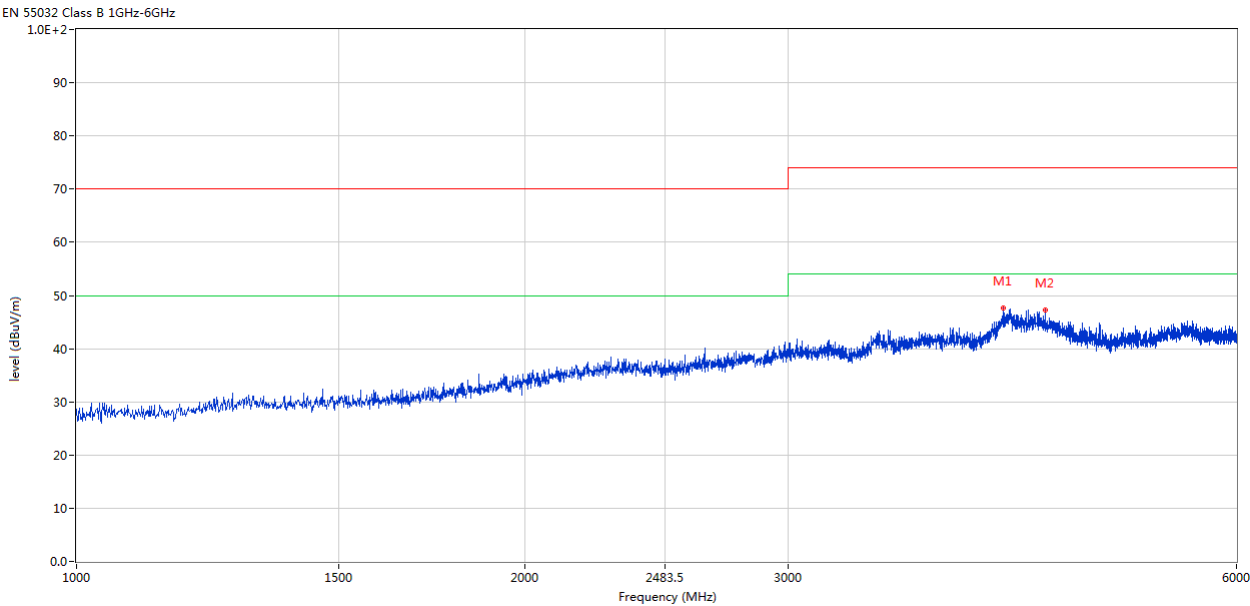

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	4182.954	47.71	1.57	74.0	-26.29	Peak	8.00	100	Vertical	Pass
2	4464.134	47.29	2.13	74.0	-26.71	Peak	13.00	100	Vertical	Pass

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



E: Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 55%RH Atmospheric Pressure: 101 kPa

EUT set Condition: 2.4G Mode (Keyboard communication with dongle)

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

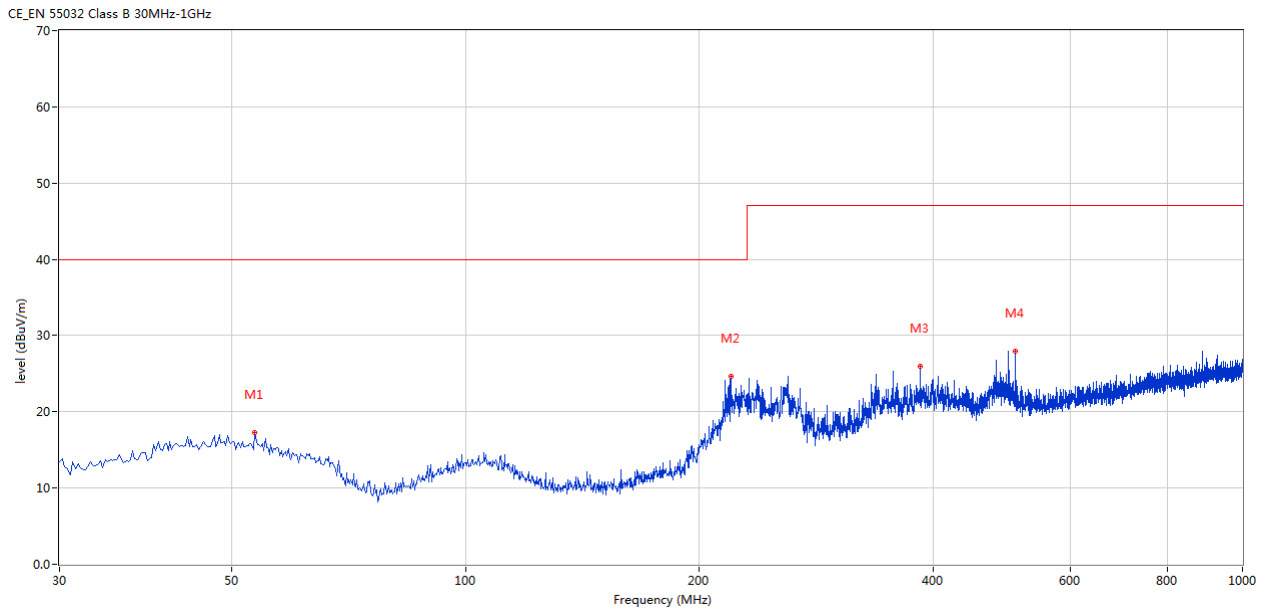

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	53.517	17.24	-11.52	40.0	-22.76	Peak	360.00	200	Horizontal	Pass
2	219.588	24.64	-13.32	40.0	-15.36	Peak	289.00	100	Horizontal	Pass
3	384.931	26.03	-9.20	47.0	-20.97	Peak	76.00	100	Horizontal	Pass
4	509.788	28.00	-6.84	47.0	-19.00	Peak	319.00	200	Horizontal	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



F: Radiated Disturbance (30MHz----1000MHz)

EUT Operating Environment

Temperature: 25°C Humidity: 55%RH Atmospheric Pressure: 101 kPa


EUT set Condition: 2.4G Mode (Keyboard communication with dongle)

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

CE_EN 55032 Class B 30MHz-1GHz

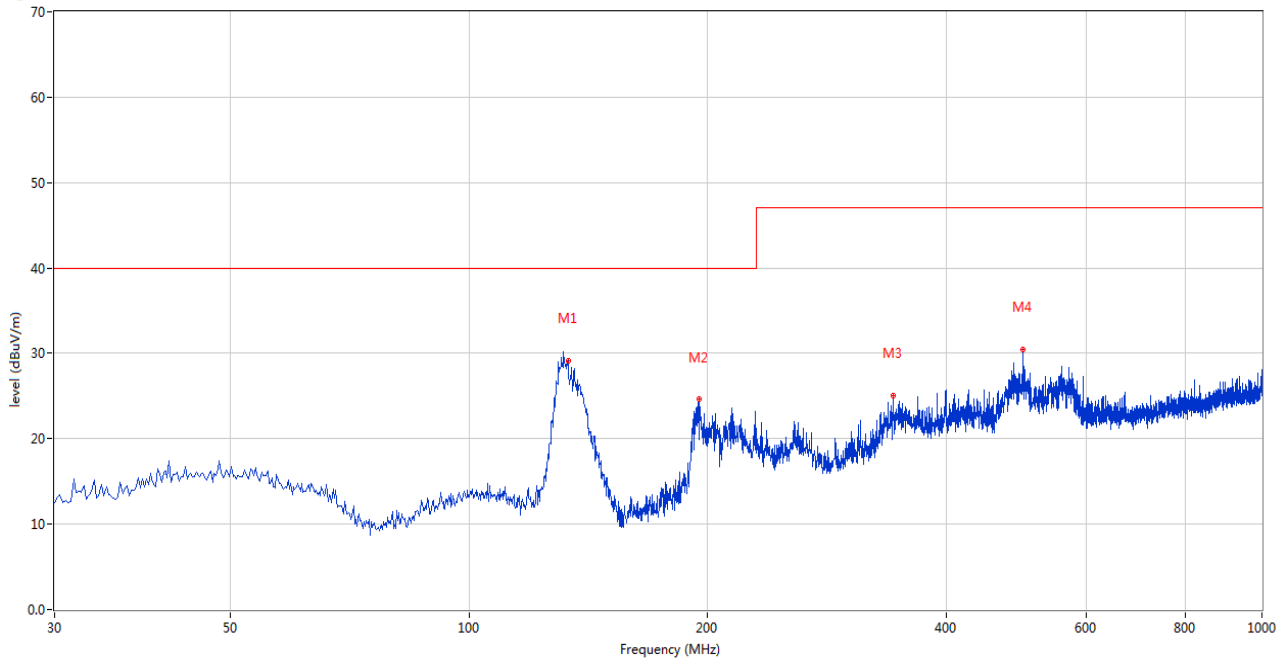

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	133.279	29.15	-16.99	40.0	-10.85	Peak	84.00	100	Vertical	Pass
2	195.101	24.59	-13.78	40.0	-15.41	Peak	89.00	100	Vertical	Pass
3	342.262	25.03	-9.70	47.0	-21.97	Peak	360.00	200	Vertical	Pass
4	500.090	30.45	-6.91	47.0	-16.55	Peak	12.00	100	Vertical	Pass


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



G: Radiated Disturbance (1000MHz---6000MHz) --- Horizontal
EUT Operating Environment
Temperature: 25℃ Humidity: 55%RH Atmospheric Pressure: 101 kPa
EUT set Condition: 2.4G Mode (Keyboard communication with dongle)
Equipment Level: Class B
Results: Pass
Please refer to following diagram for individual

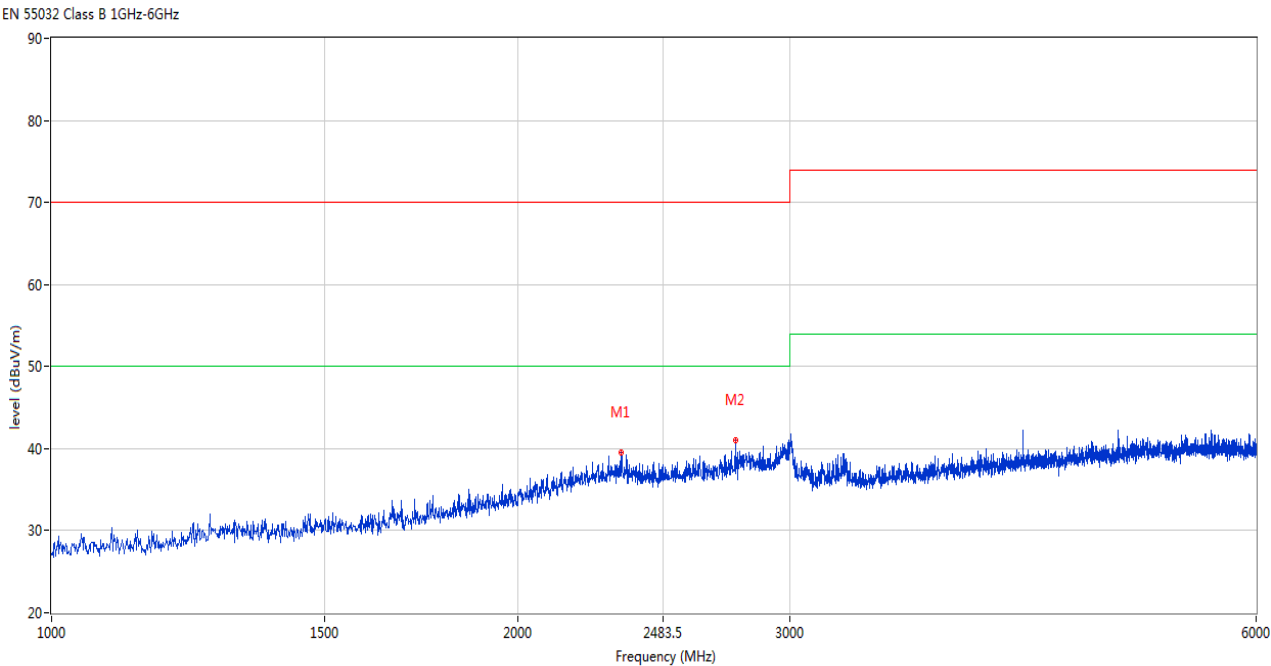


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2333.417	39.53	-3.32	70.0	-30.47	Peak	132.00	100	H	Pass
2	2764.559	40.99	-2.79	70.0	-29.01	Peak	0.00	100	H	Pass

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertizing. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



H: Radiated Disturbance (1000MHz---6000MHz) --- Vertical
EUT Operating Environment
Temperature:25℃ Humidity: 55%RH Atmospheric Pressure: 101 kPa
EUT set Condition: 2.4G Mode (Keyboard communication with dongle)
Equipment Level: Class B
Results: Pass
Please refer to following diagram for individual

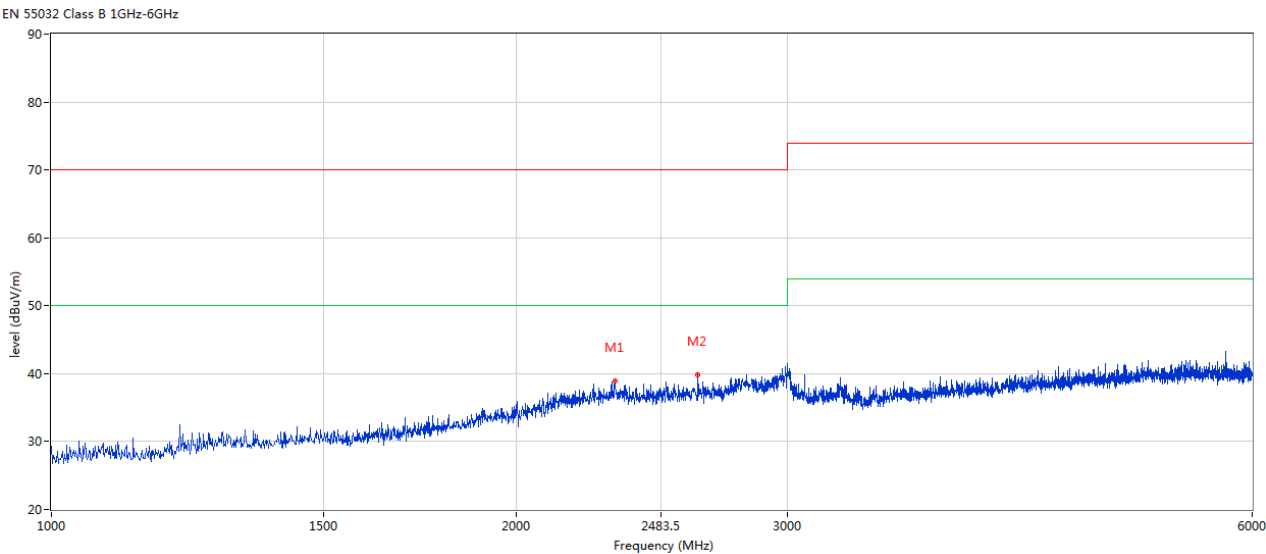

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	2318.420	38.95	-3.26	70.0	-31.05	Peak	30.00	100	V	Pass
2	2623.344	39.83	-3.24	70.0	-30.17	Peak	99.00	100	V	Pass

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 8.4 AC Line Conducted Emissions

According to EMC Basic Standard (EN 55032 Class-B)

1. For the table top EUT the distance to the reference ground plane (wall) should be 40 cm.
2. AC input line plugged into LISN.

EUT Operating Mode

USB Dongle part under normal operation/ Keyboard under charging mode

Results

Power Line (L, N)	EUT Operating mode or operating mode no.	Detector (Peak, AV, QP)	Additional (scan-) Information (e.g. Pre-test Fast scan, Maxhold, Final measurement.)	Result (Passed / Failed)
L=>GND	USB Dongle part under	QP & AV	--	Pass
N=>GND	normal operation/ Keyboard under charging mode	QP & AV	--	Pass

The frequency spectrum from 0.15MHz to 30MHz was investigated. All readings are quasi -peak values with a resolution bandwidth of 9 kHz

Temperature: 25°C

Humidity: 53% RH

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Dongle under Normal operation mode

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

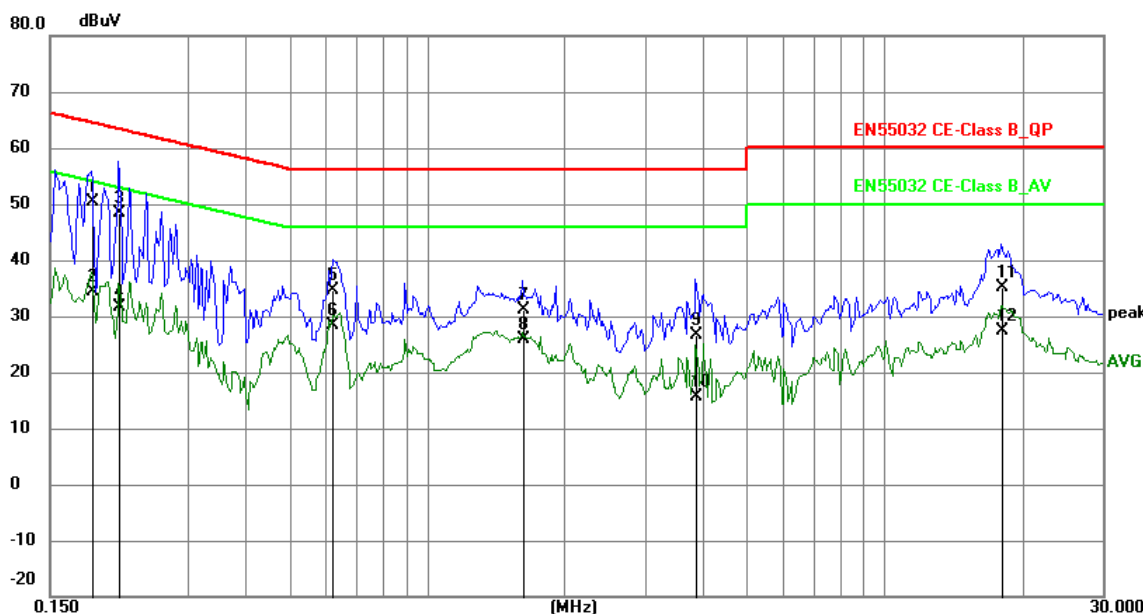

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1850	40.51	9.76	50.27	64.26	-13.99	QP	P
2	0.1850	24.55	9.76	34.31	54.26	-19.95	AVG	P
3	0.2124	38.55	9.75	48.30	63.11	-14.81	QP	P
4	0.2124	22.00	9.75	31.75	53.11	-21.36	AVG	P
5	0.6219	24.84	9.78	34.62	56.00	-21.38	QP	P
6	0.6219	18.54	9.78	28.32	46.00	-17.68	AVG	P
7	1.6203	21.28	9.80	31.08	56.00	-24.92	QP	P
8	1.6203	16.04	9.80	25.84	46.00	-20.16	AVG	P
9	3.8658	16.74	9.88	26.62	56.00	-29.38	QP	P
10	3.8658	5.71	9.88	15.59	46.00	-30.41	AVG	P
11	17.9565	24.54	10.56	35.10	60.00	-24.90	QP	P
12	17.9565	16.87	10.56	27.43	50.00	-22.57	AVG	P

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Dongle under Normal operation mode

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

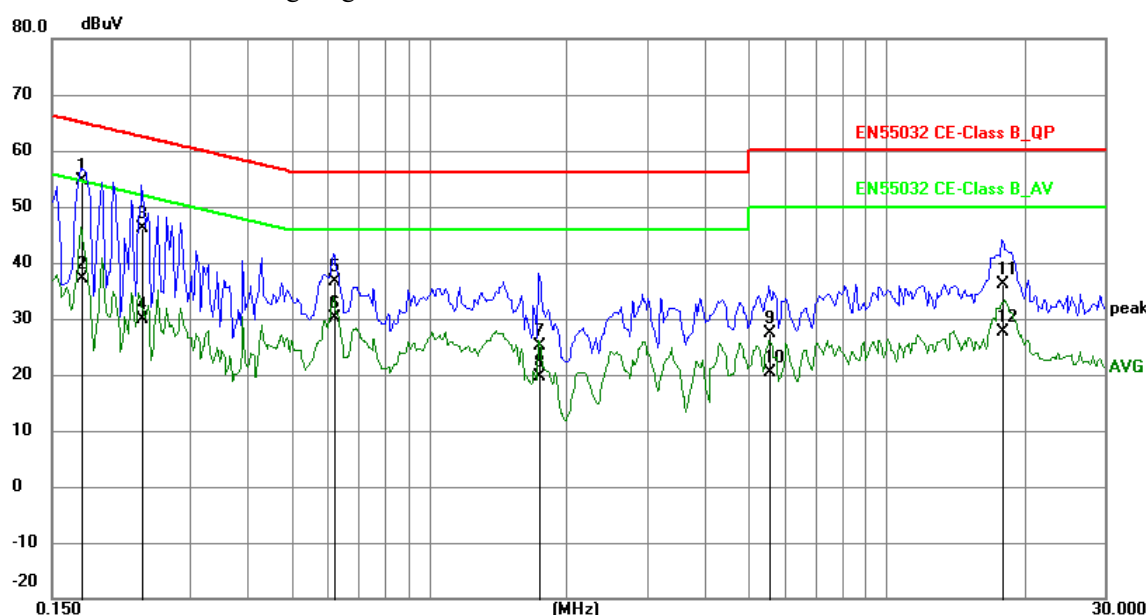

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1734	44.88	9.77	54.65	64.80	-10.15	QP	P
2	0.1734	27.34	9.77	37.11	54.80	-17.69	AVG	P
3	0.2358	36.26	9.75	46.01	62.24	-16.23	QP	P
4	0.2358	20.17	9.75	29.92	52.24	-22.32	AVG	P
5	0.6180	26.79	9.78	36.57	56.00	-19.43	QP	P
6	0.6180	20.43	9.78	30.21	46.00	-15.79	AVG	P
7	1.7412	15.28	9.80	25.08	56.00	-30.92	QP	P
8	1.7412	9.81	9.80	19.61	46.00	-26.39	AVG	P
9	5.5350	17.54	9.95	27.49	60.00	-32.51	QP	P
10	5.5350	10.51	9.95	20.46	50.00	-29.54	AVG	P
11	17.9019	25.51	10.55	36.06	60.00	-23.94	QP	P
12	17.9019	17.11	10.55	27.66	50.00	-22.34	AVG	P

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



C: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keyboard under charging mode

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

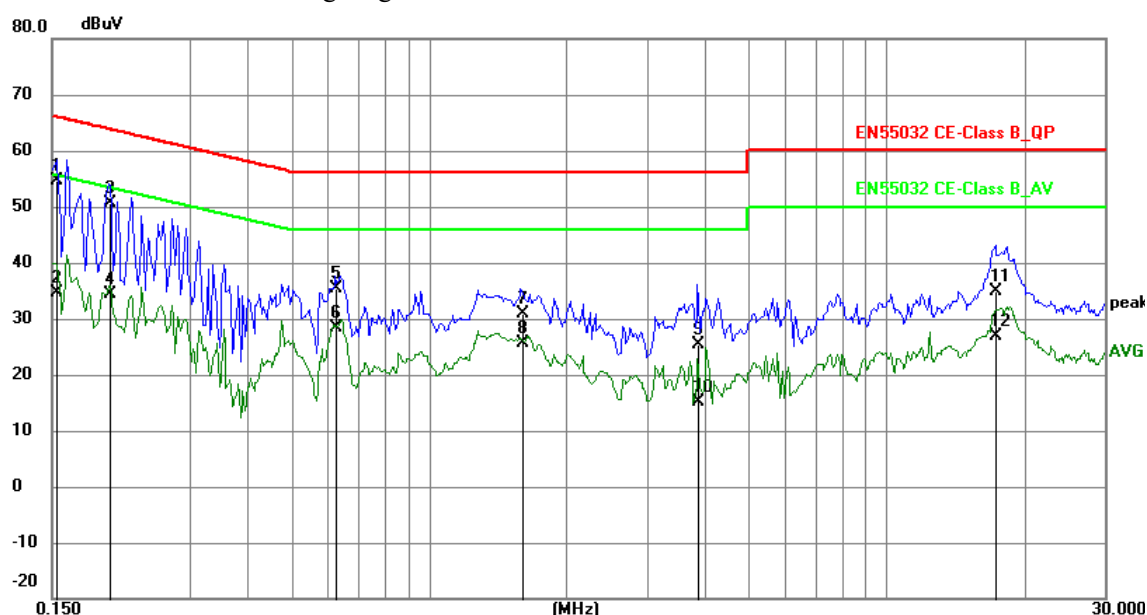

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1539	44.91	9.78	54.69	65.79	-11.10	QP	P
2	0.1539	24.78	9.78	34.56	55.79	-21.23	AVG	P
3	0.2007	40.84	9.75	50.59	63.58	-12.99	QP	P
4	0.2007	24.54	9.75	34.29	53.58	-19.29	AVG	P
5	0.6258	25.53	9.78	35.31	56.00	-20.69	QP	P
6	0.6258	18.66	9.78	28.44	46.00	-17.56	AVG	P
7	1.5935	21.20	9.80	31.00	56.00	-25.00	QP	P
8	1.5935	15.93	9.80	25.73	46.00	-20.27	AVG	P
9	3.8697	15.61	9.88	25.49	56.00	-30.51	QP	P
10	3.8697	5.30	9.88	15.18	46.00	-30.82	AVG	P
11	17.2974	24.38	10.52	34.90	60.00	-25.10	QP	P
12	17.2974	16.45	10.52	26.97	50.00	-23.03	AVG	P

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



D: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 25°C Humidity: 75%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keyboard under charging mode

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

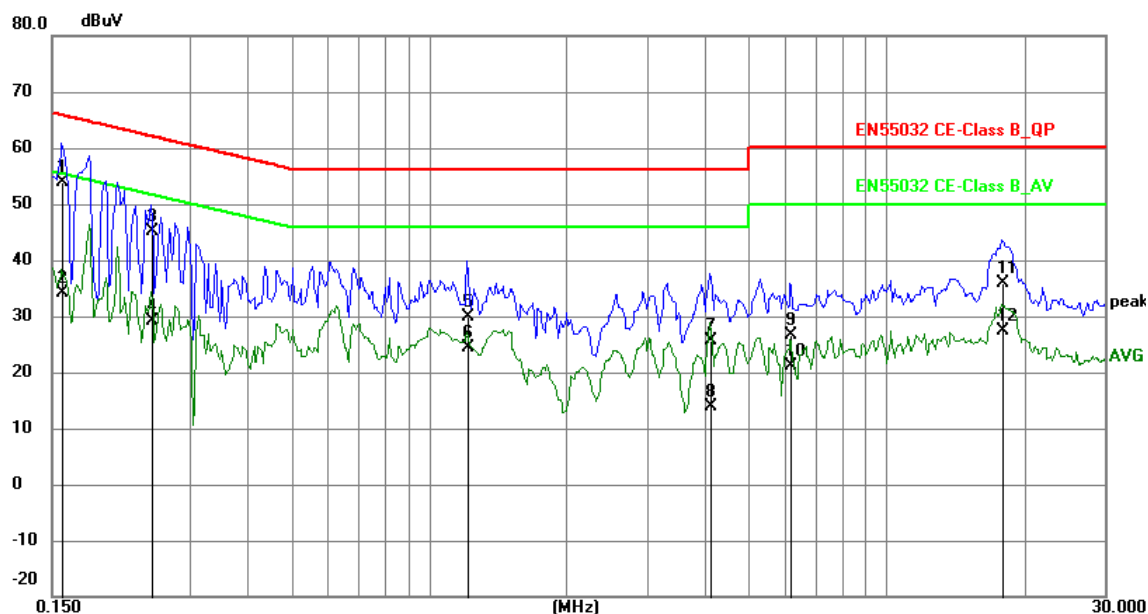

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1578	44.01	9.78	53.79	65.58	-11.79	QP	P
2	0.1578	24.37	9.78	34.15	55.58	-21.43	AVG	P
3	0.2475	35.46	9.75	45.21	61.84	-16.63	QP	P
4	0.2475	19.40	9.75	29.15	51.84	-22.69	AVG	P
5	1.2108	20.02	9.79	29.81	56.00	-26.19	QP	P
6	1.2108	14.59	9.79	24.38	46.00	-21.62	AVG	P
7	4.1310	15.78	9.89	25.67	56.00	-30.33	QP	P
8	4.1310	4.07	9.89	13.96	46.00	-32.04	AVG	P
9	6.1824	16.73	9.98	26.71	60.00	-33.29	QP	P
10	6.1824	11.19	9.98	21.17	50.00	-28.83	AVG	P
11	17.9136	25.29	10.55	35.84	60.00	-24.16	QP	P
12	17.9136	16.91	10.55	27.46	50.00	-22.54	AVG	P

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 8.5 Harmonic Current Emissions

This test was performed as per EMC Basic Standard EN IEC 61000-3-2:2019+A1:2021

EUT Operating Mode

Normal Operation

Results: N/A

Port	EUT Operating mode or operating mode no.	Result (Passed / Failed)
AC Input	Normal Operation	N/A

Please see the following test figure:

Table 1 - Limit of Harmonics Current Measurement	
Limits for Class A equipment	
Harmonics order (n)	Max. permissible harmonics current (A)
Odd harmonics	
3	2.3
5	1.14
7	0.77
9	0.40
11	0.33
13	0.21
$15 \leq n \leq 39$	$0.15 \times 15/n$
Even harmonics	
2	1.08
4	0.43
6	0.30
$8 \leq n \leq 40$	$0.23 \times 8/n$

Note:

- For Class A equipment, the harmonics of the input current shall not exceed the absolute values given in table 1.
- For Class B equipment, the harmonics of the input current shall not exceed the values given in table 1 multiplied by factor of 1, 5.

Table 2 - Limit of Harmonics Current Measurement	
Limits for Class C equipment	
Harmonics order (n)	Max. permissible harmonics current expressed as a percentage of the input current at the fundamental frequency (A)

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Odd harmonics only	
2	2
3	$30 \times \lambda^*$
5	10
7	7
9	5
$11 \leq n \leq 39$	3

Note: The harmonic current limits of lighting equipment shall not exceed the relative limits given in table 2.

Table 3 - Limit of Harmonics Current Measurement		
Limits for Class D equipment		
Harmonics order (n)	Maximum permissible harmonic current per watt mA/W	Maximum permissible harmonic current A
Odd harmonics only		
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
$13 \leq n \leq 39$	$3.85/n$	See table 1
$11 \leq n \leq 39$	3	

Note: The harmonic of the input current shall not exceed the values that can be derived from table 3.

Test Equipment

Please refer to Section 6 this report.

Test Procedure

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn.
- The EUT is classified as follows:
 - Class A Balanced three-phase equipment and all other equipment, except that stated in one of the following classes.
 - Class B Portable tools.
 - Class C Lighting equipment, including dimming devices.
 - Class D Equipment having an input current with “special wave shape” and an active input power, $P \leq 600W$

Note: Due to DC operation. This test item not applicable.

The report refers only to the sample tested and does not apply to the bulk.
This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer, Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.
In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 8.6 Flicker and Voltage Fluctuation

This test was performed as per EMC Basic Standard EN 61000-3-3: 2013+A1:2019

Environmental conditions: Temperature: 25°C; Humidity: 50%RH

EUT Operating Mode

Normal Operation

Results

Port	EUT Operating mode or operating mode no.	Result (Passed / Failed)
AC Input	Normal Operation	N/A

Please refer to the following test figure

Test Equipment

Please refer to Section 6 this report.

Test Procedure

- The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.
- During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT 10 minutes and the observation period for long-term flicker indicator is 2 hours.

Note: Tests need not be made on equipment which is unlikely to produce significant voltage fluctuations or flicker.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.2 Immunity Test – Radiated, RF Electromagnetic Field

According to EMC Basic Standard (EN 61000-4-3[9])

USB Dongle part at Operating Mode and Keyboard at Operating Mode

Environmental conditions: Temperature: 25°C; Humidity: 50%RH

Type of Port: Enclosure

Performance Criterion: CT/CR

The distance between the turn-table axis and Tx&Rx-antenna is 3m.

Field strength = 3V/m

Start Frequency = 80MHz Stop Frequency = 6000MHz

Frequency Step = lin 1MHz

Modulation = AM, 400Hz, 1kHz, 80%

Results

Frequency (MHz)	Antenna Polarity	Radiation to	Reaction of the EUT During and after test	Result
80-6000	Horizontal	Front	No reactions recognized	Passed
80-6000	Vertical	Front	No reactions recognized	Passed
80-6000	Horizontal	Rear	No reactions recognized	Passed
80-6000	Vertical	Rear	No reactions recognized	Passed
80-6000	Horizontal	Left	No reactions recognized	Passed
80-6000	Vertical	Left	No reactions recognized	Passed
80-6000	Horizontal	Right	No reactions recognized	Passed
80-6000	Vertical	Right	No reactions recognized	Passed

Note: Performance criteria A observed.

Test Equipment

Please refer to Section 6 this report.

Test Procedure

The EUT and load, which are placed on a table that is 0.8 meter above ground, are placed with one coincident with

The calibration plane such that the distance from antenna to the EUT was 3 meters.

Both horizontal and vertical polarization of the antenna and four sides of the EUT are set on measurement.

In order to judge the EUT performance, a CCD camera is used to monitor EUT screen.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.3 Electrostatic Discharge

According to EMC basic standard (EN61000-4-2[10])

USB Dongle part at Operating Mode and Keyboard at Operating Mode

Environmental conditions: Temperature: 24°C; Humidity: 50%RH

Type of Port: Enclosure, Keys, On/off Switch, Screws, Type-C Port, USB Port

Performance Criterion: TT/TR

For the table top EUT the distance to the reference ground plane should be 80 cm.

Direct contact discharge on conducting surfaces of EUT

Indirect air discharge on insulating surfaces of EUT

$\pm 2\text{kV}$, $\pm 4\text{kV}$ direct discharge & $\pm 2\text{kV}$, $\pm 4\text{kV}$, $\pm 8\text{kV}$ air discharge

Test Results

Item	Contact Discharge to conducted surfaces and to coupling planes		Air Discharge at insulating surfaces
	Direct Contact Discharge	Indirect Contact Discharge	
Test Voltage	Reaction of EUT / Result	Reaction of EUT / Result	Reaction of EUT / Result
+2kV	n.r.r Passed	n.r.r Passed	n.r.r Passed
-2kV	n.r.r Passed	n.r.r Passed	n.r.r Passed
+4kV	n.r.r Passed	n.r.r Passed	n.r.r Passed
-4kV	n.r.r Passed	n.r.r Passed	n.r.r Passed
+8kV	-	-	n.r.r Passed
-8kV	-	-	n.r.r Passed

Remarks: n.r.r. = no reaction recognized

Performance Criteria A observed and No any function degraded during the tests.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.4 Fast Transients Common Mode

According to EMC basic standard (EN61000-4-4 [11])

USB Dongle part Under Operating Mode/ Keyboard under charging mode

Environmental conditions: Temperature: 25°C; Humidity: 51%RH

Type of Port: AC mains power input/output port

Performance Criterion: TT/TR

For the table top EUT the distance to the reference ground plane should be 10 cm.

The test level for ac mains power input ports shall be 1kV open circuit.

Test Setup

Burst on Power Line (direct injection)

Test Results

Adjustment on UCS 500 M4: Trigger “AUTO”, Burst length: 15ms					Test Time:	60s for every voltage and polarity		
						120s for every voltage and polarity		
Testing on power Line (direct injection)		Reaction of The Test Object During and after Test						Result
Test Voltage	Repetition Frequency	L1 =>GND (+=>GND)	L2=> GND	L3=> GND	N=> GND	PE=> GND	L1, N, => GND	
-0.5kV	5kHz	n.r.r	N/A	N/A	n.r.r	N/A	n.r.r	Pass
+0.5kV	5kHz	n.r.r	N/A	N/A	n.r.r	N/A	n.r.r	Pass
-1.0kV	5kHz	n.r.r	N/A	N/A	n.r.r	N/A	n.r.r	Pass
+1.0kV	5kHz	n.r.r	N/A	N/A	n.r.r	N/A	n.r.r	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.5 RF Common Mode

According to EMC basic standard (EN61000-4-6 [10])

USB Dongle part Under Operating Mode/ Keyboard under charging mode

Environmental conditions: Temperature: 25°C; Humidity: 51%RH

Type of Port: AC mains power input/output port

Performance Criterion: CT/CR

Start Frequency = 150KHz Stop Frequency = 80MHz

Frequency Step = 50kHz in the range of 150kHz-5MHz

1% increment in the range of 5MHz-80MHz

Modulation = AM, 400Hz, 1kHz, 80%

Test Setup

Injection via CDN or BIC clamp

Test Results

Injection On	Injection Via	Reaction of the EUT During and after test	Result
AC input power line	CDN	No reactions recognized	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.7 Voltage Dips

According to EMC basic standard (EN61000-4-11 [13])

USB Dongle part Under Operating Mode/ Keyboard under charging mode

Environmental conditions: Temperature: 24°C; Humidity: 49%RH

Type of Port: AC mains power input/output port

Performance Criterion: TT/TR

For the table top EUT the distance to the reference ground plane should be 80 cm.

The test level shall be- a vol. Reduction of the supply vol. 100% for 10ms, 100% for 20ms , 30% for 500ms

And 100% for 5000ms

Test Results

Voltage Dip:

Test Level % Ut	Reduction	Duration (periods)	Phase Angle	Reaction of EUT during and after Test	Result
0	100%	10ms	0° - 360°	n.r.r- performance criteria A observed	Pass
0	100%	20ms	0° - 360°	n.r.r- performance criteria A observed	Pass
70	30%	500ms	0° - 360°	n.r.r- performance criteria A observed	Pass
Voltage Interceptions:					
Test Level % Ut	Reduction	Duration (periods)	Phase Angle	Reaction of EUT during and after Test	Result
0	100%	5000ms	0° - 360°	n.r.r- performance criteria B observed	Pass

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Clause 9.8 Surges Common & Differential Mode (1-phase)

According to EMC basic standard (EN61000-4-5 [14])

USB Dongle part Under Operating Mode/ Keyboard under charging mode

Environmental conditions: Temperature: 25°C; Humidity: 50%RH

Type of Port: AC mains power input/output port

Performance Criterion: TT/TR

For the table top EUT the distance to the reference ground plane should be 80 cm.

1KV open circuit for common mode & 0.5kV open circuit for differential mode.

Test Results

5 pulses for each polarity and test voltage, alternating and negative/positive, triggered in case of AC- powerline: 0°, 45°, 90° 180°, 270°, referred to the line frequency. (L1)

Repetition rate is 1 per min.

Repetition rate is 1 per min.

Test Voltage	Reaction of the test object during and after test by trigger angle/pulse no.(coupling on DC-lines =>trigger angle not relevant).					Result
	0°/pulse no1, 2	45°/pulse, no.3, 4	90°/pulse, no. 5, 6	180°/pulse, no. 7, 8	270°/pulse, no. 9, 10	
Capacitive coupling on AC line: L1=>N or DC lines lines +=>- (Ri=2 Ω /C =18uF)						
-0.5kV	No reaction	No reaction	No reaction	No reaction	No reaction	Pass
+0.5kV	Recognized	Recognized	Recognized	Recognized	Recognized	
-1.0kV	No reaction	No reaction	No reaction	No reaction	No reaction	Pass
+1.0kV	Recognized	Recognized	Recognized	Recognized	Recognized	
-2.0KV	N/A	N/A	N/A	N/A	N/A	N/A
+2.0kV						
- kV	N/A	N/A	N/A	N/A	N/A	N/A
+kV						

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



3. CE Mark label specification

Text of the mark is black or white in color and is left justified. Labels are printed in indelible ink on permanent adhesive backing and shall be affixed at a conspicuous location on the EUT or silk-screened onto the EUT.



Mark Location: Rear enclosure

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



4. Photographs – Test Setup

4.1 Photograph – Conducted Test Setup:

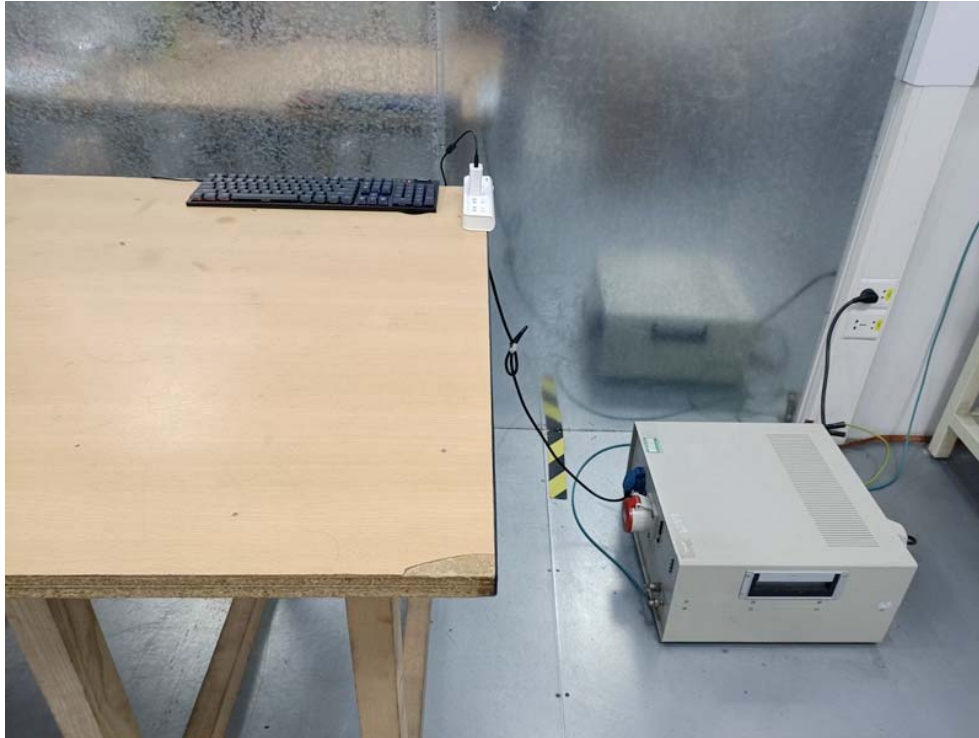


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



4.2 Photograph – Radiated Emission Test Setup:

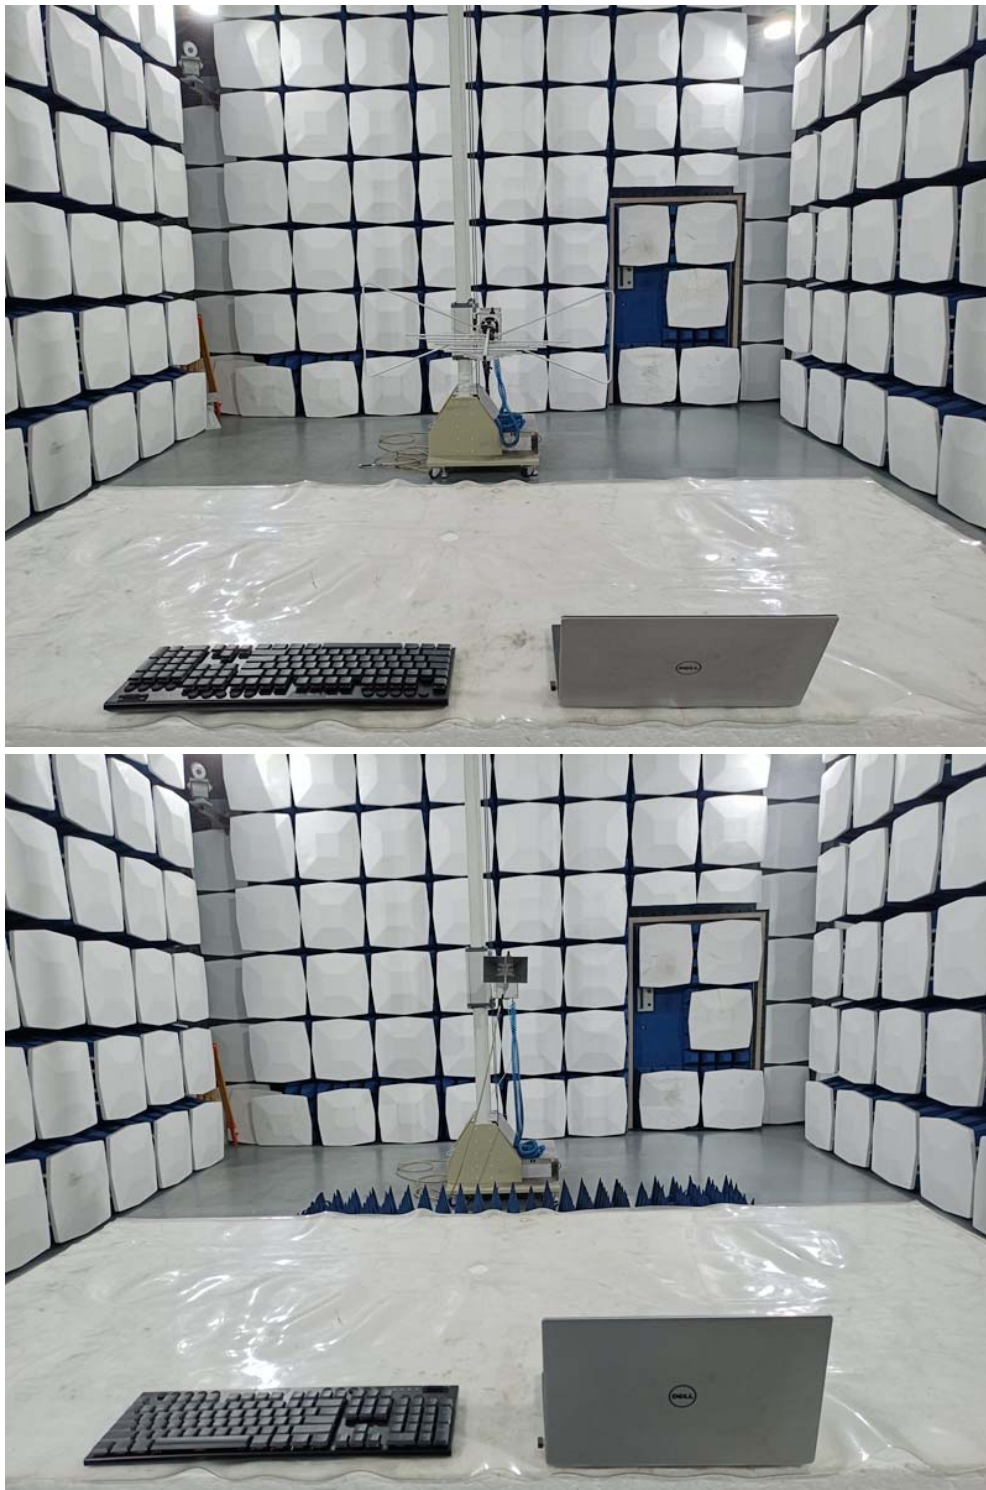

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



4.3 Photograph –ESD Test Setup




The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



4.4 Photograph –EFT/B, Surge, Voltage Dips Test Setup

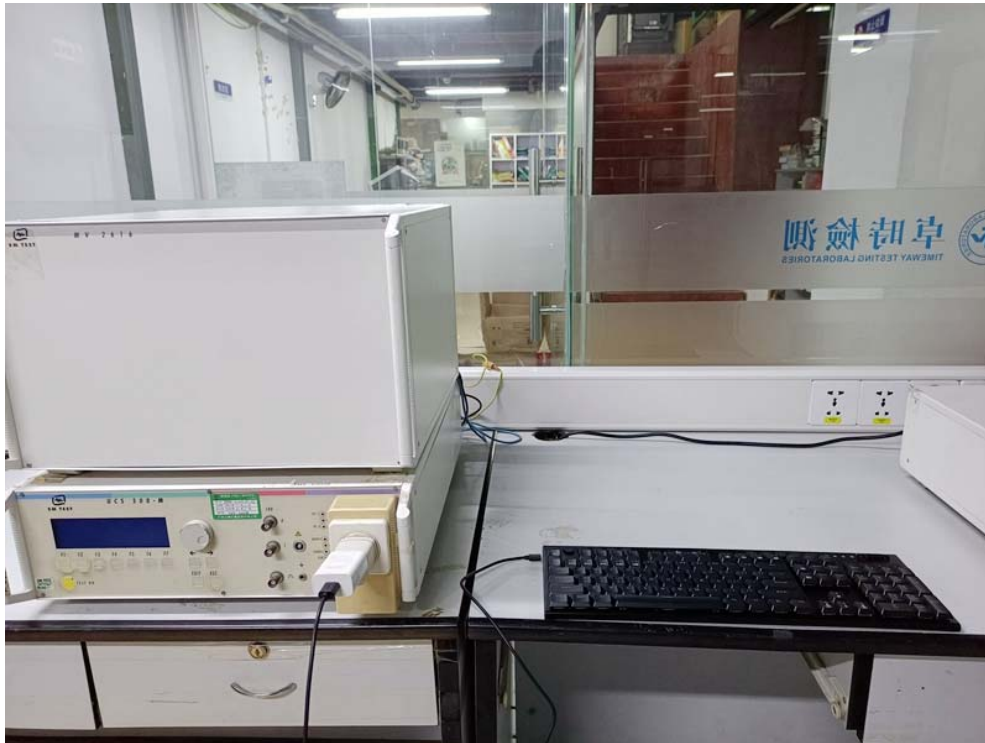

4.5 Photograph – CS Test Setup:



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



5.0 Photographs – EUT

Please refer test report TW2112123-01E

6.0 List of Measurement Equipment

6.1 Conducted Emission Test

Name	Model No.	Serial No.	Manufacturer	Calibration Date	Calibration Cycle
EMI Test Receiver	ESH3	860905/006	RS	2021.06.18	1 Year
Spectrum Analyzer	ESA-L1500A	US37451154	HP	2021.06.18	1 Year
LISN	NNB42	00012	SCHFFNER	2022.01.05	1 Year

6.2 Radiated Disturbance Test

Name	Model No	Serial No.	Manufacturer	Calibration Date	Calibration Cycle
EMI Test Receiver	ESPI 3	100379	RS	2021.06.18	1 Year
Spectrum Analyzer	E4407B	MY50441392	HP/Agilent	2021.06.18	1 Year
Amplifier	BBV9743	#218	HP/Agilent	2021.06.18	1 Year
Bilog Antenna	VULB9163	9163/340	Schwarebeck	2021.07.02	3 Year
Horn Antenna	BBHA 9120D	9120D-631	RS	2021.07.02	3 Year
Amplifier	8449B	3008A00160	HP/Agilent	2021.06.18	1 Year

6.3 Harmonic & Flicker Test

Name	Model No.	Serial No.	Manufacturer	Calibration Date	Calibration Cycle
Harmonics Flicker Test System	PACS-1	72305	CI	2021.07.02	1 Year
5K VA AC Power Source	5001iX	56060	CI	2021.07.02	N/A

6.4 ESD Test

Name	Model No.	Serial No.	Manufacturer	Calibration Date	Calibration Cycle
ESD Simulator	DITO	0404-24	EM TEST	2021.06.18	1 Year

6.5 RF field Strength Susceptibility

Name	Model No.	Serial No.	Manufacturer	Calibration Date	Calibration Cycle
------	-----------	------------	--------------	------------------	-------------------

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES, to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES, will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



Signal Generator	SMT03	100059	RS	2021.06.18	1 Year
Power Meter	NRVS	---	RS	2021.06.18	1 Year
Voltage Probe	URV5-Z2	100012	RS	2021.06.18	1 Year
Voltage Probe	URV5-Z2	100013	RS	2021.06.18	1 Year
Power Amplifier	150W1000	300999	AR	2021.06.18	1 Year
Power Amplifier	25S1G4AM1	305993	AR	2021.06.18	1 Year
Field Probe	CBL6111C	2576	Holaday	2021.06.18	1 Year
Bilog Antenna	MCDC	---	Chase	2021.06.18	1 Year

6.6 Electrical Fast Transient/Burst (EFT/B) Immunity test

Name	Model No.	Serial No.	Manufacturer	Calibration Date	Calibration Cycle
EFT Generator	UCS 500 M4	0304-42	EM TEST	2021.06.18	1 Year
Power Source	MV2616	0104-14	EM TEST	2021.06.18	1 Year

6.7 Surge Test

Name	Model No.	Serial No.	Manufacturer	Calibration Date	Calibration Cycle
Ultra Compact Simulator	UCS 500 M4	0304-42	EM TEST	2021.06.18	1 Year
Power Source	MV2616	0104-14	EM TEST	2021.06.18	1 Year

6.8 Conducted Immunity Test

Name	Model No.	Serial No.	Manufacturer	Calibration Date	Calibration Cycle
Continuous Wave Simulator	CWS 500C	0407-05	EM TEST	2021.06.18	1 Year

6.9 Voltage Dips/Interruption Immunity Test

Name	Model No.	Serial No.	Manufacturer	Calibration Date	Calibration Cycle
Ultra Compact Simulator	UCS 500 M4	0304-42	EM TEST	2021.06.18	1 Year
Power Source	MV2616	0104-14	EM TEST	2021.06.18	1 Year

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.